

RoHS

bel

GSA Apr2013D

**Type GSA / GSAP
Slow Blow Fuse Series**

6 x 32 mm Ceramic Tube
RoHS 6 Compliant

HF **Pb** GSA / GSAP Series, 6 x 32mm Slow Blow Fuse



Description

6x32mm Slow Blow, ceramic tube body cartridge fuse designed, approved and complied with UL and CSA standard 248-14.

Features

- Meet UL and CSA standard 248-14
- Wide operating temperature range
- Bulk and Tape & Reel packing available
- RoHS6 compliant
- Halogen Free
- Leadfree

Applications

Provide individual protection for components or internal circuits.

- Power Supplies
- Battery charger
- Monitor
- Adapter

LEAD FREE = **Pb**

HALOGEN FREE = **HF**

Electrical Characteristics (UL / CSA STD.248-14)

Testing current	Blow Time	
	Minimum	Maximum
100%	4 Hrs.	N/A
135%	N/A	1 Hr
200%	5 sec	30 sec

Safety Agency Approvals

SAFETY AGENCY	SAFETY AGENCY CERTIFICATE NUMBER	AMPERE RANGE / VOLT @ I.R.ABILITY
	E20624 LR39772	63mA - 8A / 125V AC @10,000A 63mA - 1A / 250V AC @35A >1A - 3.5A / 250V AC @100A >3.5A - 8A / 250V AC @200A
		10A - 15A / 125V AC @10,000A 10A - 15A / 250V AC @750A
	JET 1037-31003-1010 JET 1037-31003-1011	1A - 5A / 125V AC @500A
	JET 1037-31003-1007	>5A - 15A / 125V AC @300A
		63mA - 15A / 125V AC @10,000A 63mA - 1A / 250V AC @35A >1A - 3.5A / 250V AC @100A >3.5A - 8A / 250V AC @200A 10A - 15A / 250V AC @750A

Specifications subject to change without notice

Type GSA / GSAP Slow Blow Fuse Series

6 x 32 mm Ceramic Tube
RoHS 6 Compliant



GSA Apr2013D


Electrical Specifications

Catalog Number	Ampere Rating	Typical Cold Resistance (ohm)	Volt-drop @ 100% In (Volt) Max.	Voltage Rating (V)	Interrupting Rating	Melting I ₂ T <10 m Sec (A ² Sec)	Melting I ₂ T @ 10 In (A ² Sec)	Maximum Power Dissipation (W)	Agency Approvals						
									UL US	SP	CSA US	SP	PSE	CE	
GSA(P) 63-R	63mA	75.5	7.33	250	63mA - 15A / 125V AC @10,000A	0.087	0.098	0.71	Y	Y				Y	
GSA(P) 80-R	80mA	48.4	6.27	250		0.135	0.152	0.74	Y	Y				Y	
GSA(P) 100-R	100mA	29.4	4.41	250		0.209	0.238	0.55	Y	Y				Y	
GSA(P) 125-R	125mA	17.5	3.45	250		0.323	0.372	0.58	Y	Y				Y	
GSA(P) 160-R	160mA	12.3	3.13	250		0.499	0.581	0.60	Y	Y				Y	
GSA(P) 200-R	200mA	7.1	2.13	250		0.773	0.908	0.63	Y	Y				Y	
GSA(P) 250-R	250mA	5.0	1.97	250		1.2	1.4	0.66	Y	Y				Y	
GSA(P) 300-R	300mA	3.17	1.52	250		1.9	2.2	0.70	Y	Y				Y	
GSA(P) 375-R	375mA	2.14	1.26	250		2.6	3.2	0.73	Y	Y				Y	
GSA(P) 500-R	500mA	1.38	1.07	250		4.4	5.4	0.78	Y	Y				Y	
GSA(P) 600-R	600mA	1.05	0.98	250		6.9	8.5	0.82	Y	Y				Y	
GSA(P) 700-R	700mA	0.648	0.69	250		8.5	11	0.84	Y	Y				Y	
GSA(P) 750-R	750mA	0.642	0.68	250		10	12	0.85	Y	Y				Y	
GSA(P) 1-R	1A	0.374	0.59	250		>1A - 3.5A / 250V AC @100A	16	21	0.91	Y	Y			Y	Y
GSA(P) 1.25-R	1.25A	0.248	0.43	250		>1A - 3.5A / 250V AC @100A	25	32	0.96	Y	Y			Y	Y
GSA(P) 1.6-R	1.6A	0.155	0.38	250		>3.5A - 8A / 250V AC @200A	39	50	1.01	Y	Y			Y	Y
GSA(P) 2-R	2A	0.115	0.36	250		>3.5A - 8A / 250V AC @200A	61	79	1.06	Y	Y			Y	Y
GSA(P) 2.5-R	2.5A	0.079	0.29	250		>3.5A - 8A / 250V AC @200A	94	123	1.12	Y	Y			Y	Y
GSA(P) 3-R	3A	0.058	0.27	250		10A - 15A / 250V AC @750A	146	192	1.18	Y	Y			Y	Y
GSA(P) 4-R	4A	0.039	0.23	250		10A - 15A / 250V AC @750A	226	300	1.24	Y	Y			Y	Y
GSA(P) 5-R	5A	0.029	0.22	250	10A - 15A / 250V AC @750A	349	469	1.31	Y	Y			Y	Y	
GSA(P) 6-R	6A	0.018	0.19	250	10A - 15A / 250V AC @750A	286	455	1.61	Y	Y			Y	Y	
GSA(P) 7-R	7A	0.016	0.18	250	10A - 15A / 250V AC @750A	372	592	1.81	Y	Y			Y	Y	
GSA(P) 8-R	8A	0.013	0.17	250	10A - 15A / 250V AC @750A	483	769	1.95	Y	Y			Y	Y	
GSA(P) 10-R	10A	0.010	0.17	250	10A - 15A / 250V AC @750A	817	1300	2.26			Y	Y	Y	Y	
GSA(P) 12-R	12A	0.008	0.15	250	10A - 15A / 250V AC @750A	1277	2031	2.56			Y	Y	Y	Y	
GSA(P) 15-R	15A	0.006	0.15	250	10A - 15A / 250V AC @750A	2123	3377	2.96			Y	Y	Y	Y	

Consult manufacturer for other ratings

Soldering Parameters

Lead-free Wave Soldering Profile	
Wave Soldering Parameter	
Average ramp-up rate	200°C / second
Heating rate during preheat	typical 1 - 2°C / second Max. 4°C / second
Final preheat temperature	within 125°C of soldering temperature
Peak temperature T _p	260°C
Time within +0°C / -5°C of actual peak temperature	10 seconds
Ramp-down rate	5°C / second max.

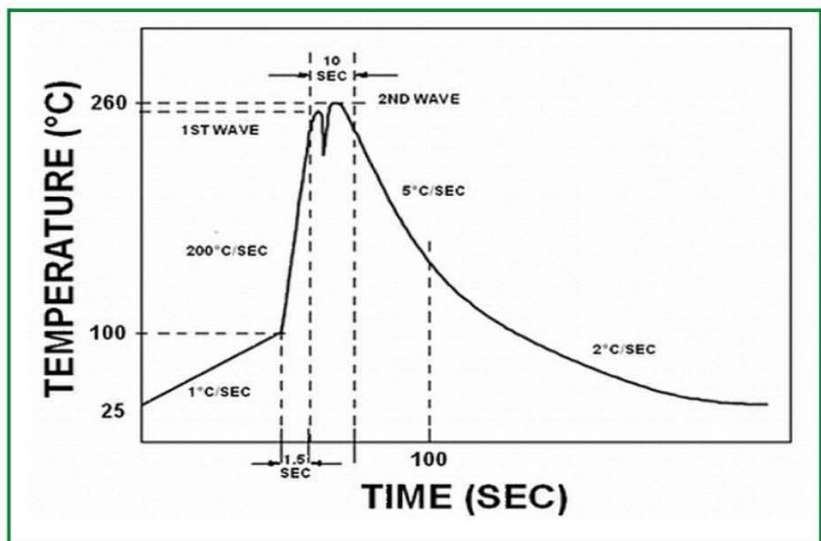

Type GSA / GSAP
Slow Blow Fuse Series


6 x 32 mm Ceramic Tube
 RoHS 6 Compliant



bel


GSA Apr2013C

Temperature Derating Curve

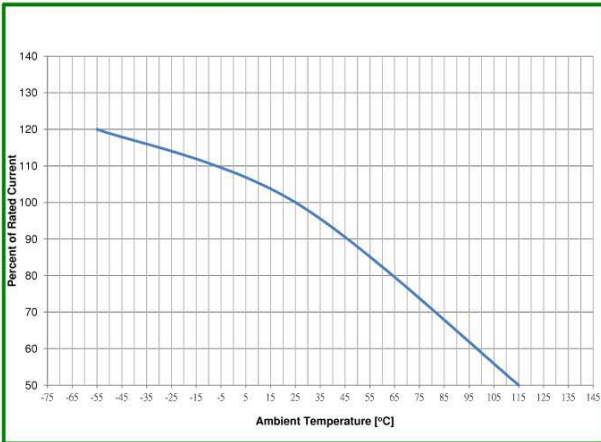

Average Time Current Curve

GSA / GSAP - TIME CURRENT CHARACTERISTIC CURVE

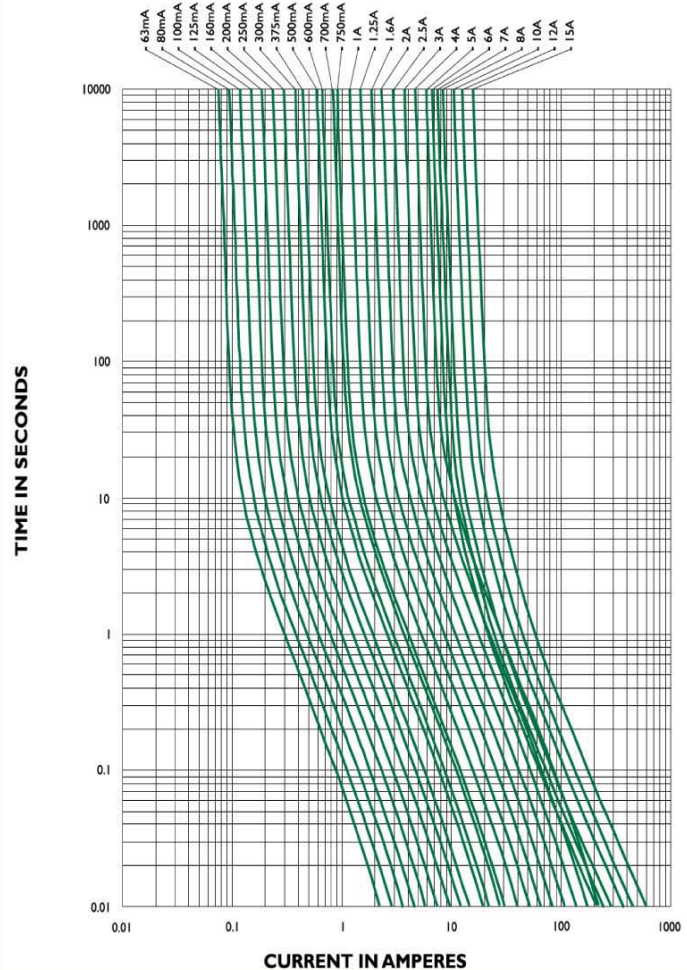

Environmental Specifications

Shock Resistance	MIL-STD-202G, Method 213B, Test Condition I (100 G's peak for 6 milliseconds; Sawtooth Waveform)
Vibration Resistance	MIL-STD-202G, Method 201A (10-55 Hz, 0.06 inch, total excursion).
Salt Spray Resistance	MIL-STD-202G, Method 101E, Test condition B (48 hrs).
Insulation Resistance	MIL-STD-202G, Method 302, Test Condition A (After Opening) 10,000 ohms minimum.
Solderability	MIL-STD-202G, Method 208H
Resistance to solder Heat	MIL-STD-202G Method 210F, Test Condition B. (260+/-5 °C, 10+/-1 sec)
Thermal Shock	MIL-STD-202G, Method 107G, Test Condition B (-65 °C to +125 °C).
Operating Temperature	-55 °C to +125 °C
Terminal Strength	IEC-68-2-21

Type GSA / GSAP Slow Blow Fuse Series

6 x 32 mm Ceramic Tube
RoHS 6 Compliant



GSA Apr2013D

Physical Specifications

Materials	Body : Ceramic
	Cap : Nickel Plated Brass Caps
	Leads: Matte Tin Plated Copper
Marking	On Fuse:
	"bel" , "GSA" , " Current Rating" ,"Voltage Rating" ,
	"Appropriate Safety Logos" , " ✓ " (RoHS 6 compliant)
	On label:
	"bel" , "GSA" , or "GSAP" ,"Current Rating" ,"Voltage Rating" ,"Interrupting Rating" , "Appropriate Safety Logos" and " " , " " (China RoHS compliant).


Fuse FGNO Explanation

06XX-[XXXX]-XX, [XXXX]=Ampere Rating


Fraction	Decimal	Milliamps	Bel FGNO(XXXX)
1/32	0.032	32	0032
1/25	.040	40	0040
1/20	.050	50	0050
1/16	.063	63	0063
8/100	.080	80	0080
1/10	.100	100	0100
1/8	.125	125	0125
15/100	.150	150	0150
	.160	160	0160
2/10	.200	200	0200
1/4	.250	250	0250
3/10	.300	300	0300
	.315	315	0315
3/8	.375	375	0375
4/10	.400	400	0400
1/2	.500	500	0500
6/10	.600	600	0600
	.630	630	0630
7/10	.700	700	0700
3/4	.750	750	0750
8/10	.800	800	0800

Fraction	Decimal	Amps	Bel FGNO(XXXX)
	1.0	1	1000
1-1/4	1.25	1.25	1250
1-1/2	1.50	1.5	1500
	1.60	1.6	1600
	2.0	2	2000
2-1/4	2.25	2.25	2250
2-1/2	2.5	2.5	2500
	3.0	3	3000
	3.15	3.15	3150
3-1/2	3.5	3.5	3500
	4.0	4	4000
	5.0	5	5000
	6.0	6	6000
	6.3	6.3	6300
	7.0	7	7000
7-1/2	7.5	7.5	7500
	8.0	8	8000
		10	9100
		12	9120
		15	9150
		20	9200
		25	9250
		30	9300

Mechanical Dimensions

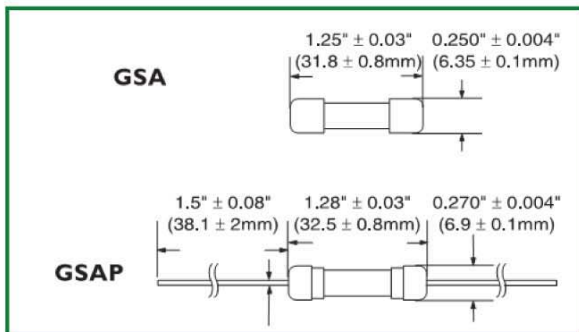

Ordering Information

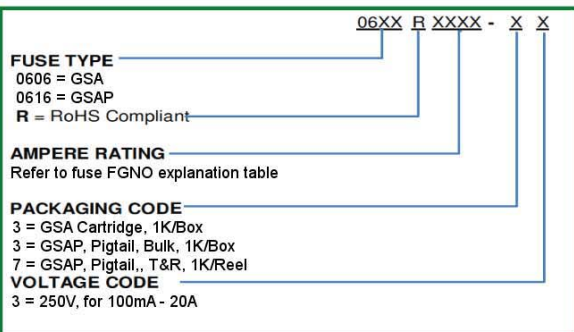

* Diameter lead 0.040" for all ratings

Specifications subject to change without notice

Packaging

Packaging Option	Packaging Specification	Quantity	Packaging Code	Inside Tape Spacing
Bulk	N/A	1000	33	N/A
Bulk (Pigtail Type)	N/A	1000	33	N/A
Tape & Reel, 10 mm Pitch	EIA-296-F	1000	73	73

CORPORATE OFFICE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
E-Mail: belfuse@belf.com
Website: www.belfuse.com

FAR EAST OFFICE

Bel Fuse Ltd.
8/F Luk Hop Industrial Building
8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706

EUROPE OFFICE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite F15
Preston, Lancashire, PR1 8UQ
United Kingdom
Tel 44-1772-556601
Fax 44-1772-561008

EUROPE

Bel Stewart GmbH
Industriestrasse 20
61381 Friedrichsdorf
Germany
Tel 49-6172-9552-0
Fax 49-6172-9552-40