


PERFORMANCE CHARACTERISTICS

1.5 A AT 20°C (FULLY LOADED)
 CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE: 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE : 20 m Ω MAX
 INSERTION FORCE: 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN /CONT
 INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

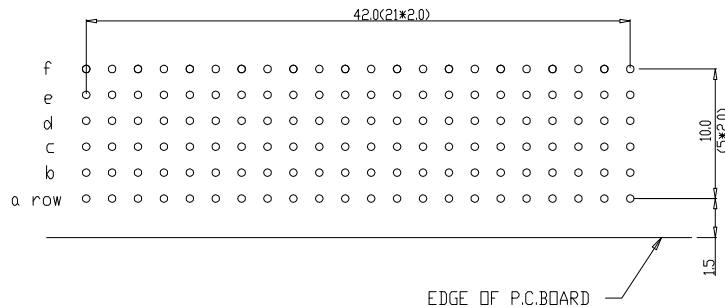

Material		Spec ref	
Mat code	Heattreat	✓	TOLERANCE 1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1°H0EKEN
Plating/Finish	Dr	15 10 97	Mfret
Dr	15 10 97	Mfret	Product family
Chr	Chr	Model Name	ECN
Appr	Appr	Model Revision	REL Level
Dr	15 10 97	Mfret	size A1
Chr	Chr	Model Name	Scale 5.000
Appr	Appr	Model Revision	REL Level
Dr	15 10 97	Mfret	Product family
Chr	Chr	Model Name	ECN
Appr	Appr	Model Revision	REL Level
Dr	15 10 97	Mfret	Product family
Chr	Chr	Model Name	ECN
Appr	Appr	Model Revision	REL Level
Dr	15 10 97	Mfret	Product family
Chr	Chr	Model Name	ECN
Appr	Appr	Model Revision	REL Level

rev	ecn no	dr	date
A	CONVERSION REVISION 01	KN	14-9-01
B	I05-0093	MINI	11-06-05
C	DG05-0278	kason	02-08-05
D	DG07-0362	kason	05/09/07
E	DG10-0110	NZ	05/30/10

FCI	MPACS 5+2R RA RCP CONN TYPE B	BS.C .201444.037	Rev. E
Pro/E file	CAT.NO. HM2R70PA5108----	CUSTOMER DRAWING	sheet 1 of 1

This drawing is the property of FCI. It is to be used for manufacturing purposes only. No part of this drawing may be reproduced without the written permission of FCI. Copyright © 2011.