

TPZ-I300 Series

Intel® Atom™ D2550/ N2600 Intelligent Health Care Platform with Rich I/O



Introduction


The Topaz TPZ-I300 is the first in ADLINK's new family of intelligent health care platforms. Based on the Intel® Atom™ D2550/N2600 processor, the TPZ-I300 provides excellent computing performance and outstanding power conservation. A fanless and cable-free structure ensures extended durability for long-term usage, providing a noiseless solution satisfying stringent medical application requirements. The TPZ-I300 significantly benefits system integrators with an innovative space-saving compact configuration and rich I/O design for maximum flexibility.

An internal PCI Express Mini Card socket and USIM slot team to support a variety of extension functions, such as wireless connection (3G/WiFi/BT), video capture, Secure Access Modules (SAM), and many others.

The TPZ-I300 is IEC/EN-60601 certified, and ADLINK is an ISO-13485 approved manufacturer.

Features

- Energy-efficient platforms featuring Intel® Atom™ D2550/N2600 processors + NM10 chipsets
- Fanless, cable-free design with extended MTBF and reliability
- Medical safety IEC/EN-60601 certified
- Compact size for ease of system installation & integration
- Easy-to-clean housing
- Built-in 6 VDC to 36 VDC wide-range DC inputs
- Rich I/O: 2 RS-232/422/485 + 2 RS-232, 3 GbE ports, 6 USB 2.0, 4 Digital I/O, DVI+VGA.
- Extended function support from mini PCIe slots with USIM.

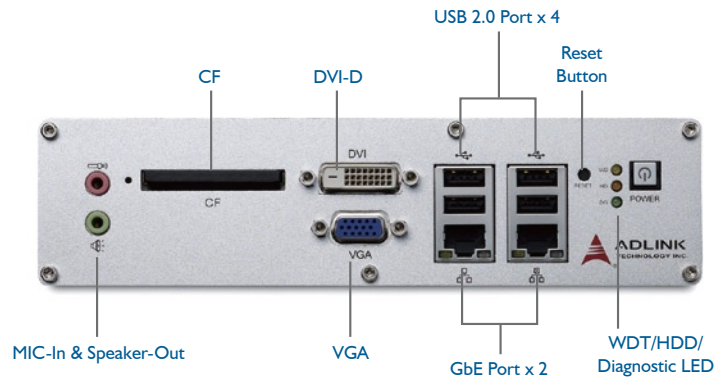


TPZ-1300 Series Front Panel

Applications

- Nursing Information System
- PACs (Picture Archiving Communication System)
- Medication Automation
- Medical Administration

Software Support

- Windows® CE7.0 / XP / XP Embedded / Embedded Standard 7 / 7

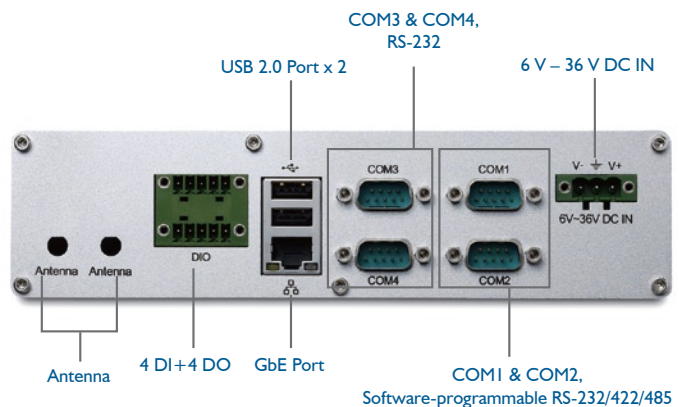

TPZ-1300 Series Back Panel

Specifications

Model Name	TPZ-1301	TPZ-1302
System Core		
■ Processor	Intel® Atom™ D2550 1.86GHz CPU	Intel® Atom™ N2600 1.6GHz CPU
■ Chipset	Intel® NM10	Intel® NM10
■ Video	VGA+DVI dual display, supports 1920 x 1200 resolution	
■ Memory	2 GB DDR3 1066 MHz SODIMM module (Up to 4 GB support)	2 GB DDR3 800 MHz SODIMM module
I/O Interface		
■ Ethernet	3 GbE ports (3x Intel® 82574L)	
■ Serial Ports	4 COM ports (2 software-programmable RS-232/422/485, and 2 RS-232)	
■ USB	6 USB 2.0 ports	
■ DI/O	4 digital input and output	
■ Audio	1 mic-in and 1 line-out	
■ Mini PCIe	1 internal mini PCIe card socket	
■ USIM	1 USIM socket for 3G communication	
■ WDT	Watchdog timer support	
Power Supply		
■ DC Input	Built-in 6-36 VDC wide-range DC input	
■ AC Input	[Option] SINPRO HPU101-108 100W AC-DC Adapter w/ EN 60601-1 3rd edition certificated	
Storage Device		
■ SATA Storage	1 onboard SATA-II port for 2.5" HDD/SSD installation	
■ CompactFlash	1 external type I CF socket, supports PIO/DMA modes	
Mechanical		
■ Dimensions	210 mm (W) x 170 mm (D) x 53 mm (H) (8.3" x 6.75" x 2.1")	
■ Weight	1.8 kg (3.98 lbs)	
■ Mounting	VESA 100 hardware kit for wall-mounting	
Environmental		
■ Operating Temperature	0°C to 40°C	
■ Storage Temperature	-40°C to 85°C (excl. HDD/SSD/CF)	
■ Humidity	~95% @ 40°C (non-condensing)	
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)	
■ ESD	Contact +/-4 KV and Air +/-8 KV	
■ Shock	Operating, 100 G, half sine 11 ms duration (w/ CF or SSD)	
■ EMC	CE and FCC Class B	
■ Safety	IEC/EN 60601-1 3rd edition	

Ordering Information

Model Name	Description	Storage Support	COM Ports	DI/O	GbE	USB	Memory
TPZ-1301	Intel® Atom™ D2550 Intelligent Health Care Platform	2.5" HDD/SSD	4	4	3	6	2 GB
TPZ-1302	Intel® Atom™ N2600 Intelligent Health Care Platform	2.5" HDD/SSD	4	4	3	6	2 GB

Optional Accessories

4 GB DDR3 Upgrade	Upgrade to 4 GB DDR3 memory (TPZ-1301)
320 GB HDD Option	Factory-installed 320 GB SATA hard disk drive (0 to 60°C)
100W AC-DC Adapter	SINPRO HPU101-108 with EN60601 3rd edition certificated
32 GB/64 GB SSD Option	Factory-installed 32 GB/64 GB SSD (0 to 70°C)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ADLINK Technology:](#)

[TPZ-1301](#) [TPZ-1301/M4G/HDD320G](#)