

**AVT-52663**  
 DC – 6000 MHz  
 InGaP HBT Gain Block



**Data Sheet**


**Description**

Avago Technologies' AVT-52663 is an economical, easy-to-use, general purpose InGaP HBT MMIC gain block amplifier utilizing Darlington pair configuration housed in a 6-lead (SOT-363) surface mount plastic package.


The Darlington feedback structure provides inherent broad bandwidth performance, resulting in useful operating frequency up to 6 GHz. This is an ideal device for small-signal gain cascades or IF amplification.

AVT-52263 is fabricated using advanced InGaP HBT (Hetero-junction Bipolar Transistor) technology that offers state-of-the-art reliability, temperature stability and performance consistency.

**Component Image**

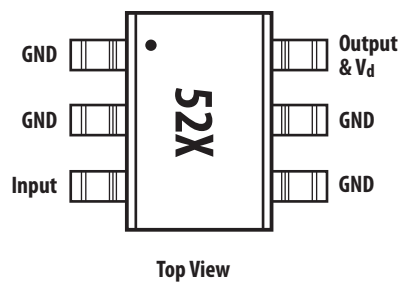

Notes:  
 Package marking provides orientation and identification  
 "52" = Device Code  
 "X" = Month of Manufacture  
 "•" = Pin 1



**Attention: Observe precautions for handling electrostatic sensitive devices.**  
 ESD Machine Model (120V)  
 ESD Human Body Model (1200V)  
 Refer to Avago Application Note A004R:  
 Electrostatic Discharge, Damage and Control.

**Features**

- Small signal gain amplifier
- Operating frequency DC to 6 GHz
- Unconditionally stable
- 50 Ohm input & output
- Flat, Broadband Frequency Response up to 2 GHz
- Industry standard SOT-363
- Lead-free, RoHS compliant, Green

**Specifications**


**2 GHz, 5V Vcc, 45 mA (typical)**

- 15.3 dB Gain
- 12.7 dBm P1dB
- 27 dBm OIP3
- 4 dB NF
- 15 dB IRL and ORL

**Applications**

- Cellular / PCS / 3G base station
- Wireless Data / WLAN
- WiMAX / WiBRO
- CATV & Cable modem
- ISM

**Typical Biasing Configuration**

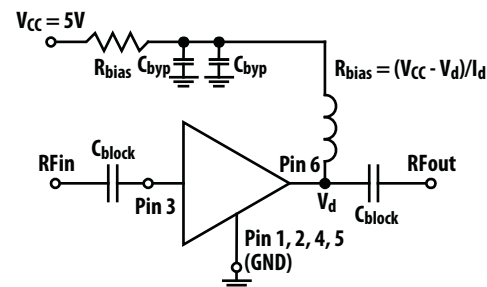

## Absolute Maximum Rating<sup>[1]</sup> $T_A=25^\circ\text{C}$

Symbol	Parameter	Units	Absolute Max.
$I_d$	Device Current	mA	90
$P_{IN,MAX}$	CW RF Input Power	dBm	18
$P_{DISS}$	Total Power Dissipation <sup>[3]</sup>	mW	394
$T_{OPT}$	Operating Temperature	$^\circ\text{C}$	-40 to 85
$T_{J,MAX}$	Junction Temperature	$^\circ\text{C}$	150
$T_{STG}$	Storage Temperature	$^\circ\text{C}$	-65 to 150

## Thermal Resistance

Thermal Resistance<sup>[2]</sup>  $\theta_{JC} = 149^\circ\text{C}/\text{W}$   
 $(I_d = 45 \text{ mA}, T_C = 85^\circ\text{C})$

Notes:

1. Operation of this device in excess of any of these limits may cause permanent damage.
2. Thermal resistance measured using Infrared measurement technique.
3. Ground lead temperature is  $25^\circ\text{C}$ . Derate  $6.7\text{mW}/^\circ\text{C}$  for  $T_C > 91^\circ\text{C}$ .

## Electrical Specifications<sup>[4]</sup>

$T_A = 25^\circ\text{C}$ ,  $Z_o = 50 \Omega$ ,  $V_{CC} = 5 \text{ V}$ ,  $R_{bias} = 22 \Omega$ ,  $P_{in} = -15 \text{ dBm}$  (unless specified otherwise)

Symbol	Parameter and Test Condition	Frequency	Units	Min.	Typ.	Max.
$I_d$	Device Current		mA	42	45.6	49
$G_p$	Power Gain	900 MHz 2000 MHz	dB	13.8	16.1 15.5	16.8
$\Delta G_p$	Gain Flatness	0.05 - 2 GHz			0.67	
$f_{3dB}$	3 dB Bandwidth		GHz		5	
OIP3 <sup>[5]</sup>	Output 3 <sup>rd</sup> Intercept Point	900 MHz 2000 MHz	dBm	26.2	30.2 27.7	
S11	Input Return Loss, $50\Omega$ source	900 MHz 2000 MHz	dB		-21.9 -15.9	
S22	Output Return Loss, $50\Omega$ load	900MHz 2000 MHz	dB		-19.1 -15.2	
S12	Reverse Isolation	900 MHz 2000 MHz	dB		-19.3 -19.8	
P1dB	Output Power at 1dB Gain Compression	900 MHz 2000 MHz	dBm		15.6 15	
NF	Noise Figure	900 MHz 2000 MHz	dB		3.6 4	

Notes:

4. Measurements obtained on CPWG line with reference plane at the ends of DUT leads (as shown in Figure 1).
5. OIP3 test condition:  $F_{RF1} - F_{RF2} = 10\text{MHz}$  with input power of  $-15 \text{ dBm}$  per tone measured at worse side band.



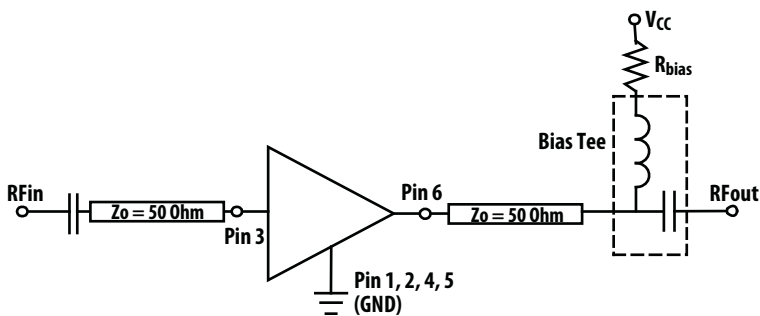


Figure 1. Block diagram of board used for  $I_d$ , Gain, OIP3, S11, S22, S12, OP1dB and NF measurements. Circuit losses have been de-embedded from actual measurements.


**Product Consistency Distribution Charts at 2 GHz,  $V_{CC} = 5\text{ V}$ ,  $R_{bias} = 22\ \Omega$**

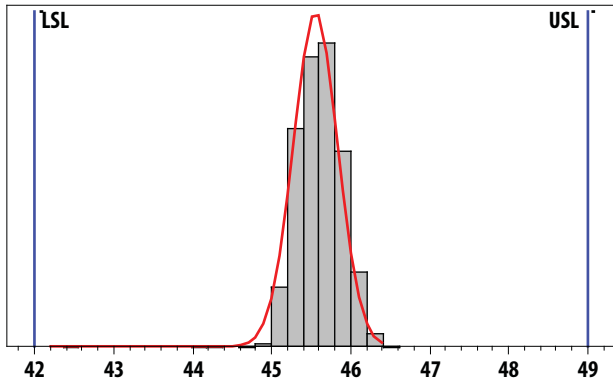

**Figure 2.  $I_d$  (mA) distribution. LSL = 42, Nominal = 45.6, USL = 49**

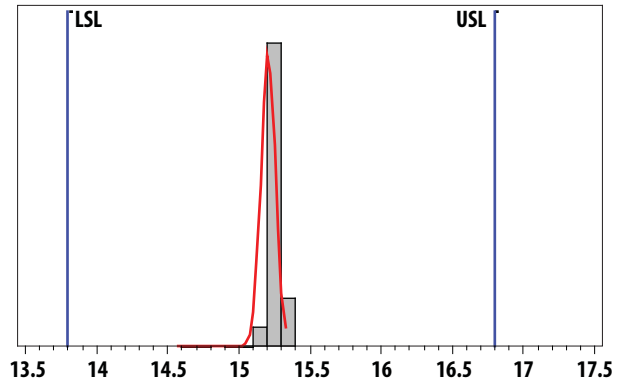

**Figure 3. Gain (dB) distribution. LSL = 13.8, Nominal = 15.2, USL = 16.8**

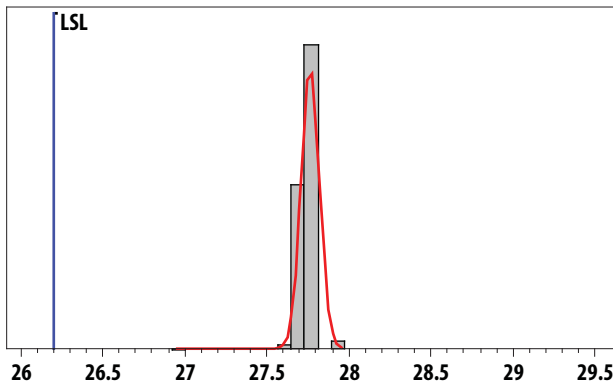

**Figure 4. OIP3 (dBm) distribution. LSL = 26.2, Nominal = 27.7**

**Notes:**

1. Statistical distribution determined from a sample size of 2099 samples taken from 6 different wafers, measured on a production test board.
2. Future wafers allocated to this product may have typical values anywhere between the minimum and maximum specification limits.

## AVT-52663 Typical Performance Curves

$T_A = 25^\circ\text{C}$ ,  $Z_o = 50\ \Omega$ ,  $P_{in} = -15\ \text{dBm}$  (unless specified otherwise)

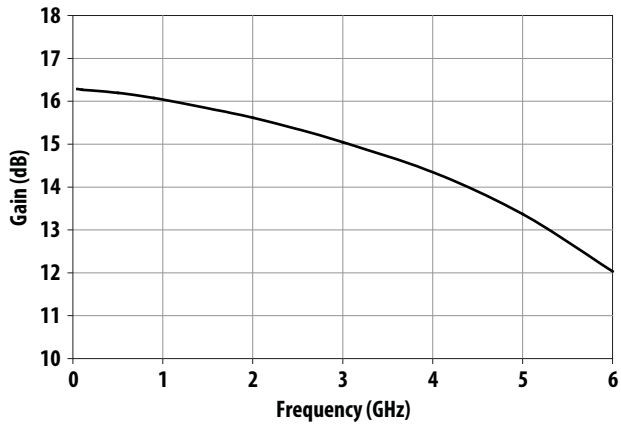


Figure 5. Gain vs Frequency at  $I_d = 45\text{mA}$

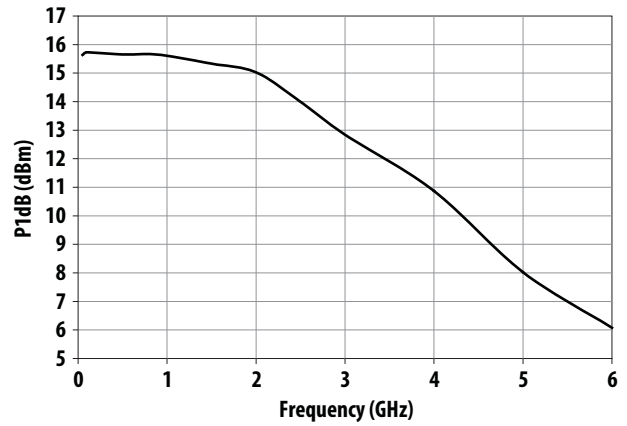


Figure 6. P1dB vs Frequency at  $I_d = 45\text{mA}$

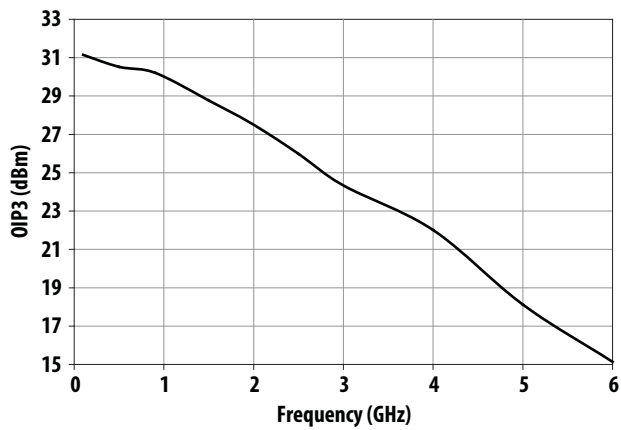


Figure 7. OIP3 vs Frequency at  $I_d = 45\text{mA}$

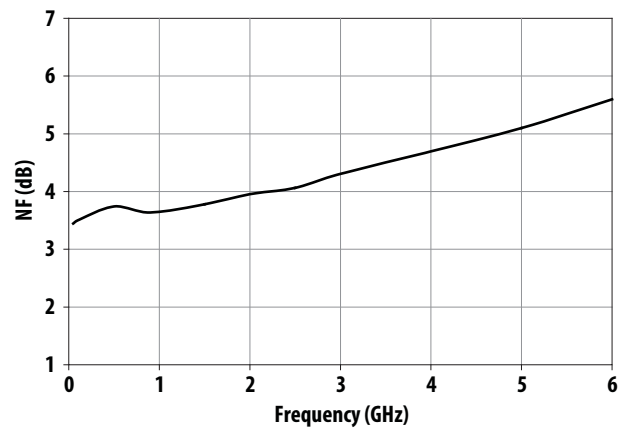


Figure 8. NF vs Frequency at  $I_d = 45\text{mA}$

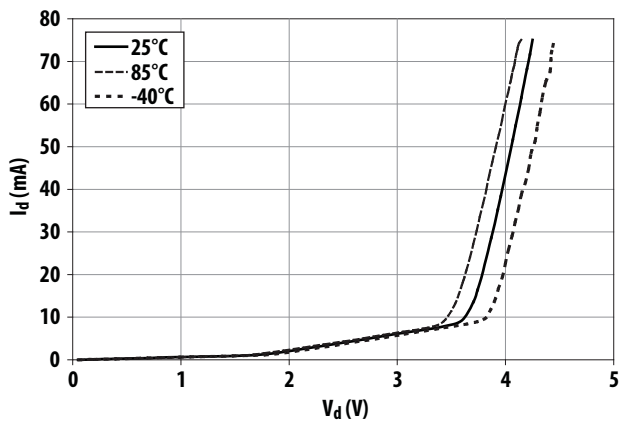


Figure 9.  $I_d$  vs  $V_d$  and Temperature

## AVT-52663 Typical Performance Curves

$T_A = 25^\circ\text{C}$ ,  $Z_o = 50 \Omega$ ,  $P_{in} = -15 \text{ dBm}$  (unless specified otherwise), continued

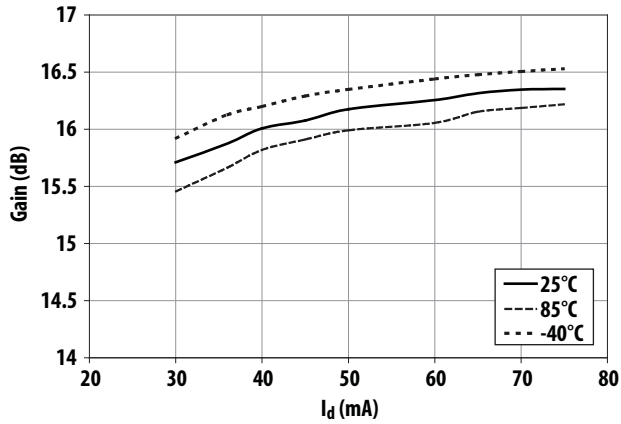


Figure 10. Gain vs  $I_d$  and Temperature at 900 MHz

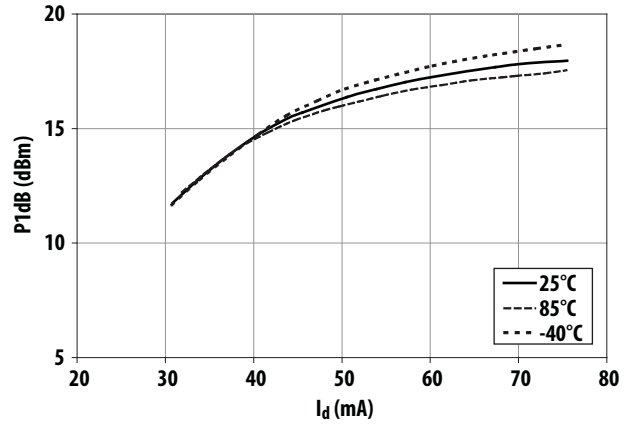


Figure 11. P1dB vs  $I_d$  and Temperature at 900 MHz

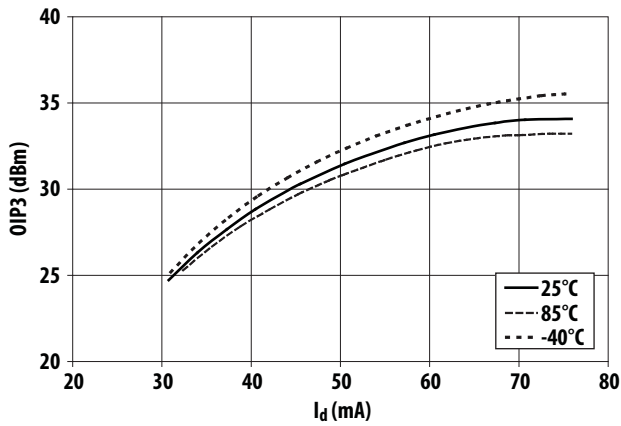


Figure 12. OIP3 vs  $I_d$  and Temperature at 900 MHz

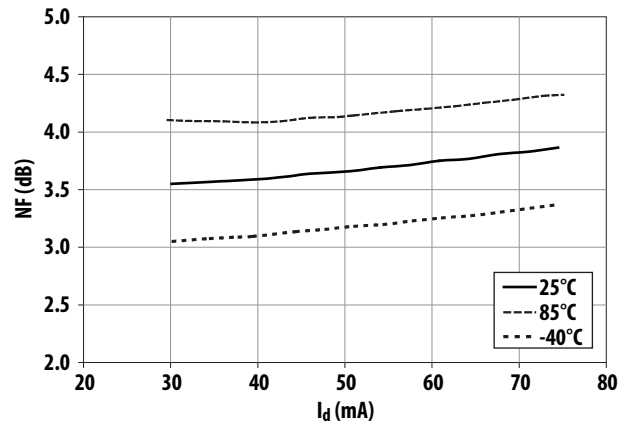


Figure 13. NF vs  $I_d$  and Temperature at 900 MHz

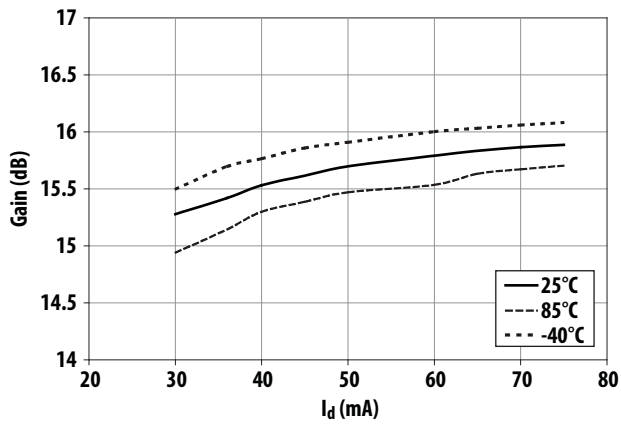


Figure 14. Gain vs  $I_d$  and Temperature at 2 GHz

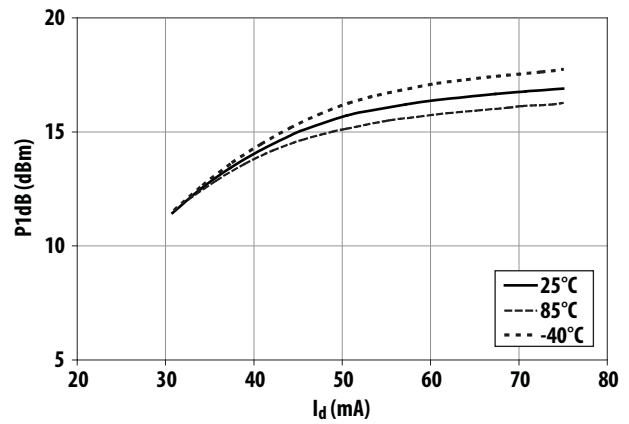


Figure 15. P1dB vs  $I_d$  and Temperature at 2 GHz

## AVT-52663 Typical Performance Curves

$T_A = 25^\circ\text{C}$ ,  $Z_o = 50 \Omega$ ,  $P_{in} = -15 \text{ dBm}$  (unless specified otherwise), continued

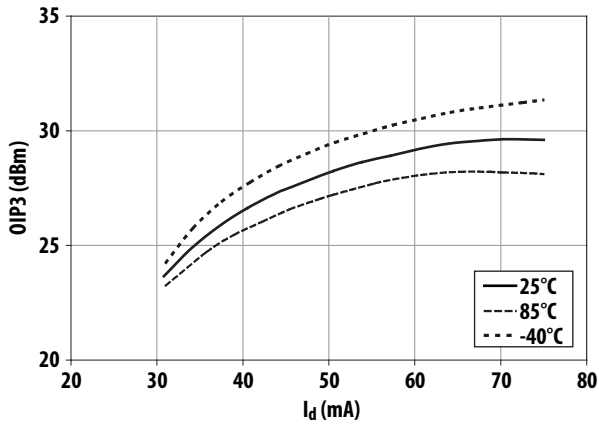


Figure 16. OIP3 vs  $I_d$  and Temperature at 2 GHz

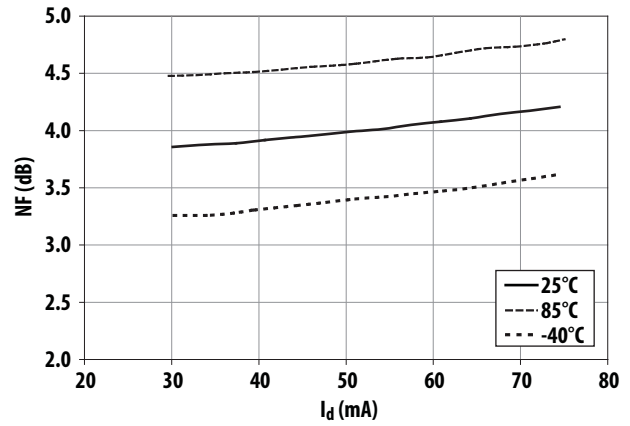


Figure 17. NF vs  $I_d$  and Temperature at 2 GHz

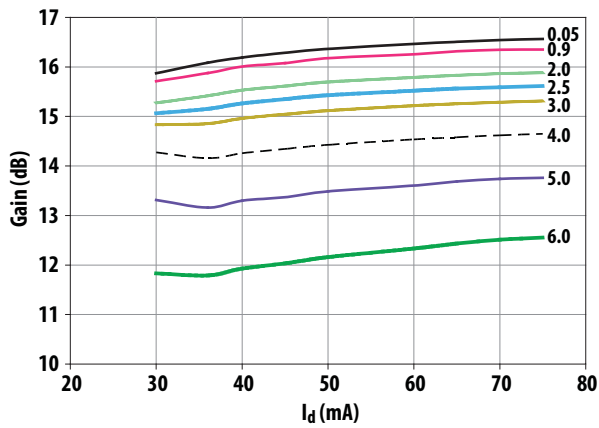


Figure 18. Gain vs  $I_d$  and Frequency (GHz)

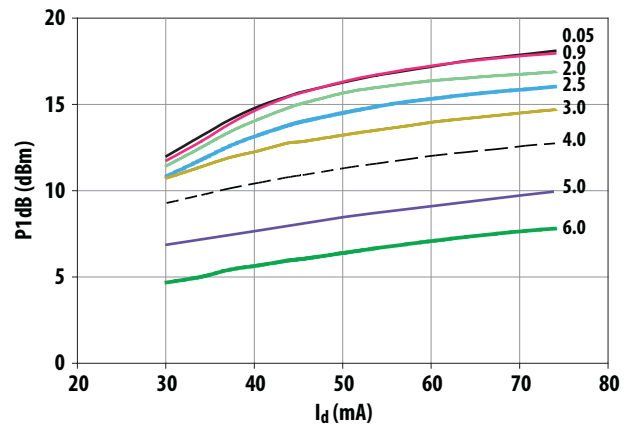


Figure 19. P1dB vs  $I_d$  and Frequency (GHz)

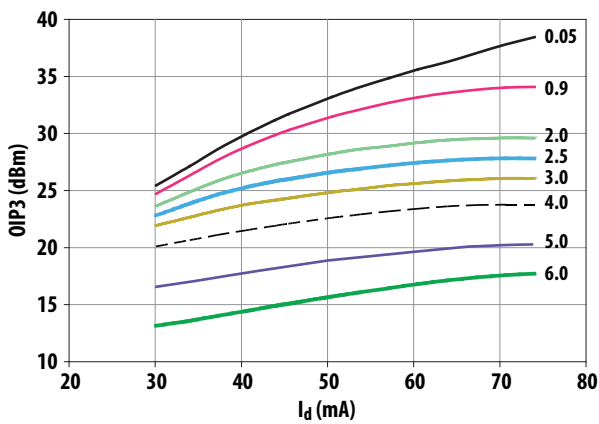


Figure 20. OIP3 vs  $I_d$  and Frequency (GHz)

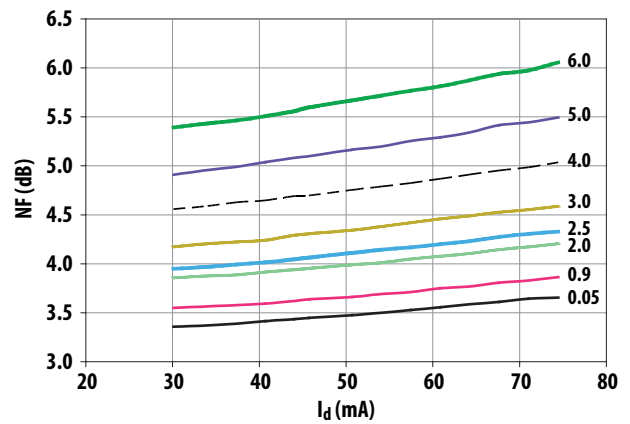


Figure 21. NF vs  $I_d$  and Frequency (GHz)

## AVT-52663 Typical Performance Curves

$T_A = 25^\circ\text{C}$ ,  $Z_o = 50\ \Omega$ ,  $P_{in} = -15\ \text{dBm}$  (unless specified otherwise), continued

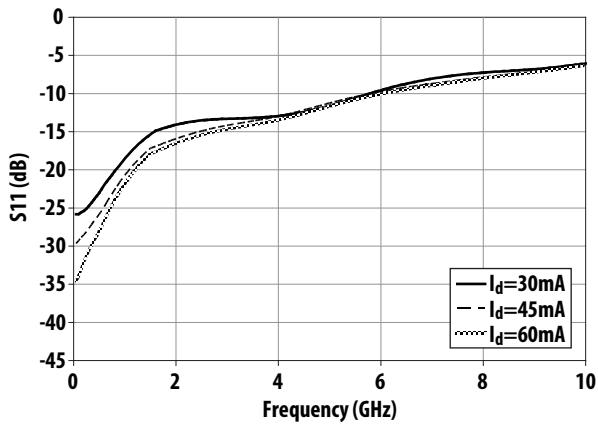


Figure 22.  $S_{11}$  vs Frequency and  $I_d$

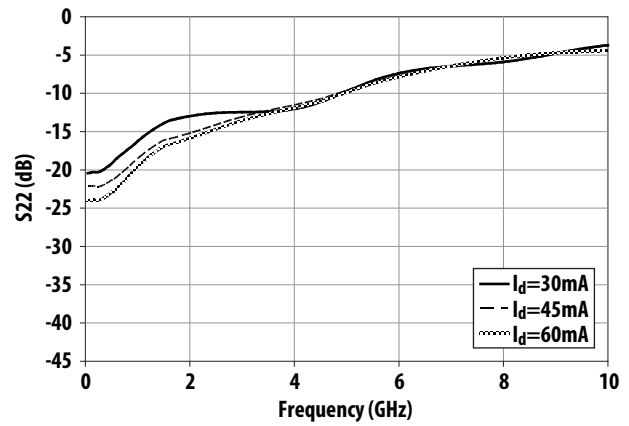


Figure 23.  $S_{22}$  vs  $I_d$  and Frequency

**AVT-52663 Typical Scattering Parameters**  $T_A = 25\text{ }^\circ\text{C}$ ,  $Z_0 = 50\ \Omega$ ,  $I_d = 30\text{ mA}$ , (unless specified otherwise)

Id=30mA	S11		S21		S12		S22		K	
	mag	angle	dB	mag	angle	mag	angle	mag		angle
0.05	0.06	1.08	15.78	6.15	178.08	0.11	-1.03	0.09	-0.63	1.1
0.10	0.06	4.55	15.78	6.15	176.13	0.11	-1.84	0.09	-1.01	1.1
0.50	0.07	10.45	15.69	6.09	160.79	0.11	-8.84	0.11	-5.81	1.1
0.90	0.11	1.94	15.56	6.00	145.66	0.11	-15.73	0.14	-16.53	1.1
1.50	0.17	-17.19	15.29	5.81	123.38	0.11	-25.87	0.20	-37.00	1.1
2.00	0.19	-29.76	15.06	5.66	105.08	0.10	-34.18	0.22	-54.04	1.1
2.50	0.21	-43.17	14.81	5.50	87.04	0.10	-42.26	0.24	-70.56	1.1
3.00	0.22	-57.31	14.54	5.33	69.15	0.09	-50.13	0.24	-86.65	1.2
3.50	0.22	-72.83	14.28	5.17	51.22	0.09	-57.78	0.25	-103.25	1.3
4.00	0.23	-90.82	13.99	5.00	33.02	0.08	-65.03	0.26	-121.67	1.4
4.50	0.24	-111.31	13.61	4.79	14.45	0.07	-71.55	0.27	-142.00	1.5
5.00	0.26	-135.34	13.08	4.51	-4.32	0.06	-76.32	0.31	-161.58	1.7
5.50	0.29	-160.04	12.42	4.18	-22.91	0.05	-77.59	0.37	-179.31	2.0
6.00	0.32	178.20	11.66	3.83	-41.00	0.05	-73.98	0.41	163.39	2.2
6.50	0.36	158.29	10.79	3.46	-58.41	0.04	-66.50	0.45	146.59	2.4
7.00	0.40	140.62	9.86	3.11	-75.07	0.05	-58.97	0.48	130.10	2.3
7.50	0.42	124.58	8.89	2.78	-91.04	0.05	-55.04	0.51	114.09	2.0
8.00	0.44	108.83	7.90	2.48	-106.57	0.06	-55.56	0.54	98.76	1.8
8.50	0.45	92.07	6.87	2.21	-121.85	0.07	-59.63	0.56	84.19	1.6
9.00	0.46	74.00	5.75	1.94	-136.92	0.08	-66.07	0.58	70.24	1.5
9.50	0.48	56.10	4.50	1.68	-151.40	0.09	-73.70	0.60	56.89	1.5
10.00	0.51	40.64	3.16	1.44	-164.84	0.09	-81.54	0.61	44.11	1.6
10.50	0.55	28.90	1.76	1.22	-177.02	0.09	-89.03	0.63	31.81	1.6
11.00	0.58	20.51	0.38	1.04	-171.90	0.10	-96.05	0.65	19.93	1.7
11.50	0.60	13.72	-0.96	0.90	161.51	0.10	-102.90	0.66	8.59	1.7
12.00	0.61	6.50	-2.23	0.77	151.40	0.10	-109.98	0.68	-1.98	1.8
12.50	0.61	-2.54	-3.44	0.67	141.26	0.10	-117.52	0.70	-11.70	2.0
13.00	0.61	-13.69	-4.60	0.59	130.99	0.11	-125.56	0.71	-20.65	2.2
13.50	0.62	-26.23	-5.75	0.52	120.60	0.11	-134.06	0.72	-29.26	2.4
14.00	0.63	-38.99	-6.91	0.45	110.15	0.11	-142.94	0.73	-38.13	2.6
14.50	0.65	-51.05	-8.10	0.39	99.74	0.11	-152.04	0.73	-47.66	2.8
15.00	0.67	-61.71	-9.37	0.34	89.75	0.11	-161.02	0.73	-57.72	3.2
16.00	0.70	-76.98	-12.11	0.25	73.22	0.10	-176.26	0.75	-75.90	4.0
17.00	0.72	-84.83	-14.75	0.18	63.44	0.10	-173.72	0.79	-86.50	4.7
18.00	0.72	-90.95	-16.75	0.15	56.48	0.10	164.64	0.80	-93.82	5.5
19.00	0.71	-104.77	-18.47	0.12	46.31	0.11	151.38	0.79	-104.73	7.2
20.00	0.72	-125.76	-20.67	0.09	32.84	0.10	133.46	0.77	-122.61	9.9

Notes:

1. S-parameters are measured on a CPWG line fabricated on 0.025 inch thick Rogers® RO4350 material. The input reference plane is at the end of the input lead. The output reference plane is at the end of the output lead.



**AVT-52663 Typical Scattering Parameters**  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50 \Omega$ ,  $I_d = 45 \text{ mA}$ , (unless specified otherwise)

Id=45mA	S11		S21		S12		S22		K	
	mag	angle	dB	mag	angle	mag	angle	mag		angle
0.05	0.03	1.701	16.3	6.52	178.1	0.11	-0.49	0.08	0.02	1.1
0.10	0.03	7.36	16.3	6.51	176.2	0.11	-1.47	0.08	-0.24	1.1
0.50	0.05	19.21	16.2	6.45	161.2	0.11	-8.12	0.09	-3.15	1.1
0.90	0.08	9.95	16.1	6.37	146.4	0.11	-14.6	0.11	-14.2	1.1
1.50	0.14	-10.3	15.8	6.19	124.4	0.11	-24.2	0.16	-36.8	1.1
2.00	0.16	-21.9	15.6	6.04	106.3	0.1	-32.2	0.17	-55.4	1.1
2.50	0.18	-36.2	15.3	5.85	88.35	0.1	-40	0.2	-73.1	1.1
3.00	0.2	-52.6	15.0	5.65	70.57	0.09	-47.5	0.22	-89.6	1.2
3.50	0.21	-70.6	14.7	5.44	52.89	0.09	-54.8	0.24	-106	1.2
4.00	0.22	-90	14.3	5.22	35.19	0.08	-61.5	0.27	-123	1.3
4.50	0.25	-110	13.9	4.96	17.36	0.07	-67.1	0.29	-141	1.5
5.00	0.27	-130	13.4	4.66	-0.48	0.06	-71	0.33	-160	1.6
5.50	0.3	-151	12.7	4.33	-18.1	0.05	-71.9	0.37	-177	1.8
6.00	0.33	-170	12.0	4	-35.3	0.05	-69	0.41	165.4	2.0
6.50	0.35	172	11.2	3.65	-52.3	0.05	-63.5	0.45	148.1	2.1
7.00	0.37	153.6	10.4	3.3	-68.8	0.05	-57.9	0.48	131.3	2.1
7.50	0.39	135.7	9.4	2.96	-84.7	0.05	-54.9	0.51	115.6	1.9
8.00	0.41	118.4	8.4	2.63	-99.9	0.06	-55.2	0.54	101.3	1.7
8.50	0.42	101.5	7.4	2.34	-115	0.07	-58.2	0.56	88.19	1.6
9.00	0.44	84.93	6.3	2.07	-129	0.08	-63.3	0.58	75.75	1.5
9.50	0.46	69.25	5.2	1.82	-142	0.09	-69.7	0.59	63.26	1.5
10.00	0.49	55.36	4.1	1.6	-155	0.09	-76.8	0.6	50.32	1.5
10.50	0.51	43.36	2.9	1.4	-168	0.1	-84.3	0.61	37	1.5
11.00	0.53	32.49	1.7	1.21	-180	0.1	-92.1	0.63	23.77	1.6
11.50	0.54	21.98	0.4	1.04	168.7	0.1	-99.8	0.65	11.35	1.6
12.00	0.56	11.64	-1.0	0.9	157.8	0.11	-107	0.68	0.336	1.7
12.50	0.57	1.468	-2.3	0.77	147.6	0.11	-115	0.7	-9.14	1.8
13.00	0.59	-8.86	-3.5	0.67	137.8	0.11	-122	0.71	-17.5	2.0
13.50	0.6	-19.7	-4.6	0.59	128.1	0.11	-130	0.72	-25.5	2.1
14.00	0.62	-30.7	-5.8	0.52	118.2	0.11	-138	0.72	-34	2.3
14.50	0.64	-41.3	-6.9	0.45	108.2	0.11	-147	0.72	-43.6	2.6
15.00	0.66	-50.9	-8.0	0.4	98.49	0.11	-155	0.71	-54.1	2.8
16.00	0.69	-66.2	-10.5	0.3	81.12	0.11	-171	0.74	-73	3.3
17.00	0.7	-78.9	-13.0	0.22	68.45	0.1	177.3	0.78	-84.2	3.9
18.00	0.71	-90.9	-15.2	0.17	58.94	0.1	166.9	0.8	-90.9	4.7
19.00	0.73	-102	-17.3	0.14	49.24	0.1	155.3	0.78	-101	6.1
20.00	0.76	-115	-19.6	0.11	37.47	0.1	140.5	0.77	-119	8.0

Notes:

1. S-parameters are measured on a CPWG line fabricated on 0.025 inch thick Rogers® RO4350 material. The input reference plane is at the end of the input lead. The output reference plane is at the end of the output lead.

**AVT-52663 Typical Scattering Parameters**  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50 \Omega$ ,  $I_d = 60 \text{ mA}$ , (unless specified otherwise)

Id=60mA	S11		S21		S12		S22		K	
	mag	angle	dB	mag	angle	mag	angle	mag		angle
0.05	0.019	7.6	16.5	6.656	178.2	0.109	-0.1	0.063	0.4	1.1
0.10	0.020	15.8	16.5	6.646	176.3	0.109	-1.4	0.063	0.8	1.1
0.50	0.039	31.0	16.4	6.588	161.3	0.108	-8.0	0.071	0.6	1.1
0.90	0.072	18.3	16.3	6.498	146.6	0.107	-14.4	0.096	-10.4	1.1
1.50	0.127	-6.1	16.0	6.322	124.7	0.104	-23.9	0.143	-34.1	1.1
2.00	0.149	-17.8	15.8	6.160	106.7	0.101	-31.7	0.161	-52.8	1.1
2.50	0.169	-32.3	15.5	5.972	88.9	0.097	-39.5	0.184	-70.7	1.1
3.00	0.184	-48.8	15.2	5.768	71.2	0.092	-47.0	0.210	-87.3	1.2
3.50	0.197	-66.9	14.9	5.554	53.7	0.086	-54.3	0.233	-103.3	1.2
4.00	0.212	-86.4	14.5	5.330	36.2	0.079	-61.0	0.254	-120.3	1.2
4.50	0.234	-106.4	14.1	5.082	18.6	0.071	-66.8	0.280	-139.0	1.3
5.00	0.260	-127.4	13.6	4.789	0.8	0.063	-71.0	0.320	-157.5	1.5
5.50	0.287	-148.2	13.0	4.468	-16.7	0.055	-72.3	0.366	-175.0	1.6
6.00	0.314	-166.9	12.3	4.137	-33.9	0.048	-69.7	0.404	167.3	2.0
6.50	0.336	174.5	11.6	3.792	-50.9	0.046	-64.1	0.442	149.8	2.1
7.00	0.357	155.9	10.7	3.440	-67.5	0.047	-58.1	0.477	132.9	2.1
7.50	0.378	137.6	9.8	3.092	-83.5	0.052	-54.6	0.510	117.0	1.9
8.00	0.398	120.1	8.8	2.761	-98.8	0.060	-54.5	0.539	102.4	1.7
8.50	0.416	103.0	7.8	2.455	-113.6	0.068	-57.4	0.563	89.1	1.5
9.00	0.436	86.2	6.7	2.175	-127.8	0.077	-62.4	0.580	76.5	1.4
9.50	0.458	70.3	5.7	1.918	-141.6	0.085	-68.9	0.593	63.9	1.4
10.00	0.483	56.2	4.5	1.684	-154.9	0.092	-76.1	0.603	50.8	1.4
10.50	0.505	44.1	3.3	1.469	-167.6	0.098	-83.7	0.615	37.3	1.4
11.00	0.524	33.1	2.1	1.274	-179.7	0.102	-91.6	0.632	24.0	1.5
11.50	0.539	22.4	0.8	1.098	168.7	0.104	-99.4	0.654	11.5	1.5
12.00	0.554	12.0	-0.5	0.943	157.8	0.106	-107.1	0.678	0.4	1.6
12.50	0.570	1.8	-1.8	0.812	147.5	0.107	-114.5	0.700	-9.2	1.7
13.00	0.585	-8.6	-3.0	0.704	137.5	0.108	-122.0	0.716	-17.6	1.8
13.50	0.601	-19.5	-4.2	0.616	127.7	0.109	-129.8	0.722	-25.6	2.0
14.00	0.620	-30.6	-5.3	0.542	117.7	0.110	-138.0	0.721	-34.2	2.2
14.50	0.642	-41.2	-6.4	0.477	107.7	0.111	-146.5	0.716	-43.8	2.4
15.00	0.664	-50.8	-7.6	0.417	97.8	0.111	-155.1	0.715	-54.2	2.7
16.00	0.692	-66.2	-10.0	0.315	80.2	0.108	-170.5	0.740	-73.2	3.1
17.00	0.698	-78.8	-12.5	0.236	67.3	0.105	177.4	0.780	-84.4	3.7
18.00	0.708	-90.9	-14.8	0.183	57.5	0.103	166.9	0.796	-91.0	4.5
19.00	0.731	-102.3	-16.8	0.144	47.5	0.101	155.3	0.783	-101.5	5.8
20.00	0.761	-115.2	-19.2	0.110	35.3	0.096	140.5	0.770	-119.4	7.7

Notes:


1. S-parameters are measured on a CPWG line fabricated on 0.025 inch thick Rogers® RO4350 material. The input reference plane is at the end of the input lead. The output reference plane is at the end of the output lead.

## Part Number Ordering Information

Part Number	No. of Devices	Container
AVT-52663-TR1G	3000	7" Reel
AVT-52663-BLKG	100	Antistatic Bag

## Package Dimensions

### Outline 63 (SOT-363/SC-70)

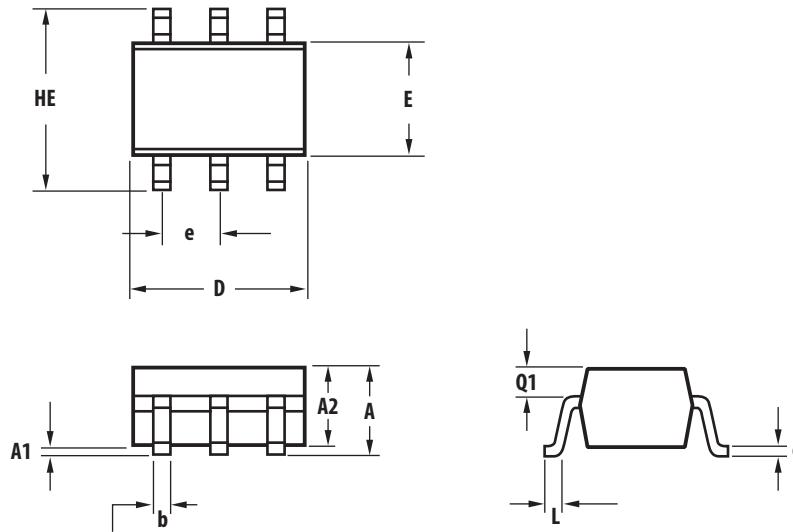


SYMBOL	DIMENSIONS (mm)	
	MIN.	MAX.
E	1.15	1.35
D	1.80	2.25
HE	1.80	2.40
A	0.80	1.10
A2	0.80	1.00
A1	0.00	0.10
Q1	0.10	0.40
e	0.65	
b	0.15	0.30
c	0.08	0.25
L	0.10	0.46

#### Notes:


1. All dimensions are in mm.
2. Dimensions are inclusive of plating.
3. Dimensions are exclusive of mold flash & metal burr.
4. All specifications comply to EIAJSC70.
5. Die is facing up for mold and facing down for trim/form, ie: reverse trim/form.
6. Package surface to be mirror finish. 0.650BCS.

## Recommended PCB Pad Layout for Avago's SC70 6L/SOT-363 Products

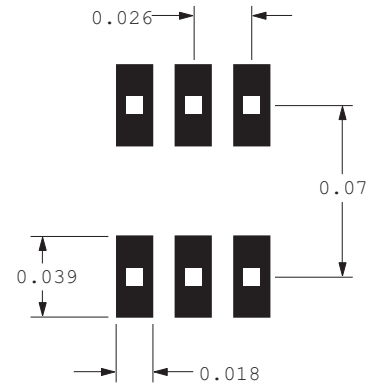


Dimensions in inch

## Device Orientation


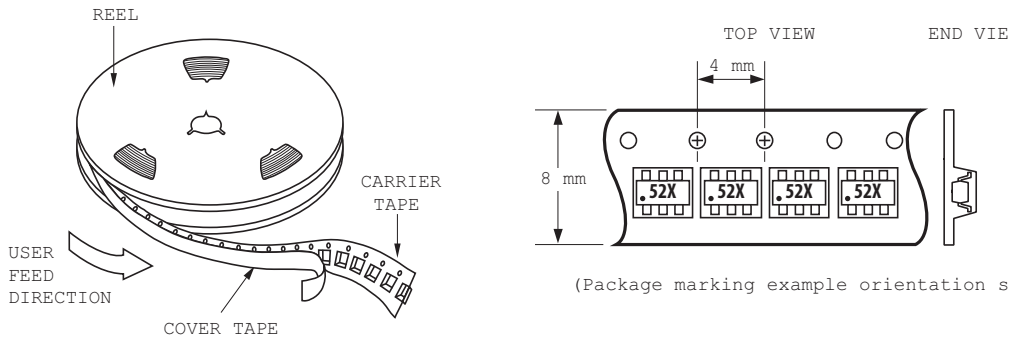


## Tape Dimensions and Product Orientation for Outline 63

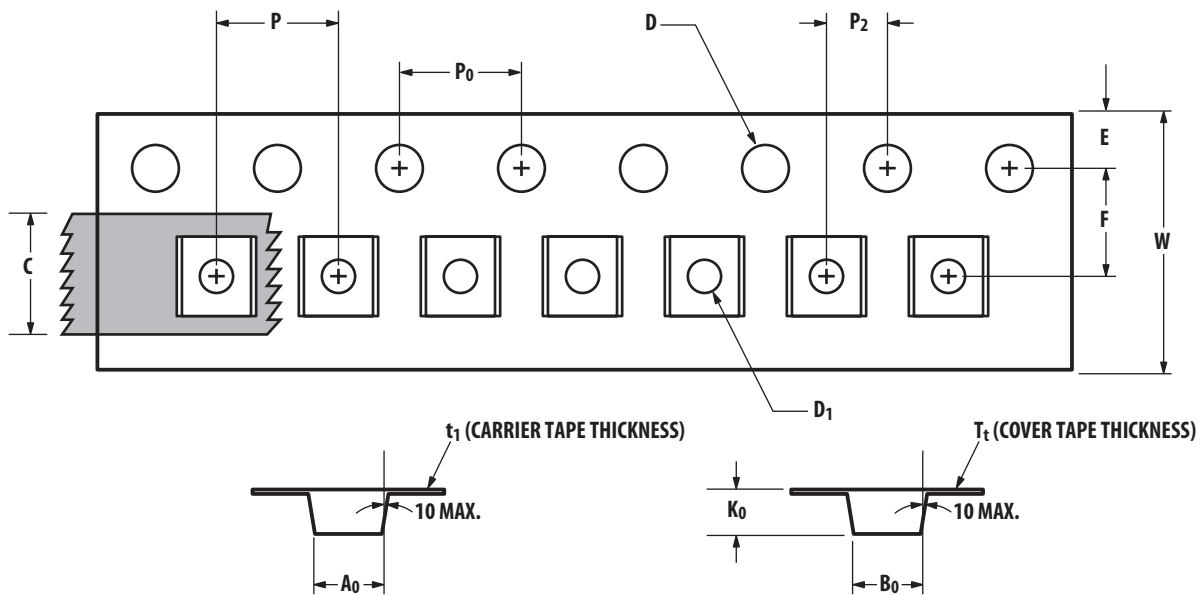


DESCRIPTION		SYMBOL	SIZE (mm)	SIZE (INCHES)
CAVITY	LENGTH	A <sub>0</sub>	2.40 0.10	0.094 0.004
	WIDTH	B <sub>0</sub>	2.40 0.10	0.094 0.004
	DEPTH	K <sub>0</sub>	1.20 0.10	0.047 0.004
	PITCH	P	4.00 0.10	0.157 0.004
	BOTTOM HOLE DIAMETER	D <sub>1</sub>	1.00 ± 0.25	0.039 ± 0.010
	PERFORATION	DIAMETER	D	1.50 0.10
	PITCH	P <sub>0</sub>	4.00 0.10	0.157 0.004
	POSITION	E	1.75 0.10	0.069 0.004
CARRIER TAPE	WIDTH	W	8.00 ± 0.30 - 0.10	0.315 ± 0.012
	THICKNESS	t <sub>1</sub>	0.254 0.02	0.0100 0.0008
COVER TAPE	WIDTH	C	5.40 0.10	0.205 ± 0.004
	TAPE THICKNESS	T <sub>t</sub>	0.062 0.001	0.0025 0.0004
DISTANCE	CAVITY TO PERFORATION (WIDTH DIRECTION)	F	3.50 0.05	0.138 0.002
	CAVITY TO PERFORATION (LENGTH DIRECTION)	P <sub>2</sub>	2.00 0.05	0.079 0.002

**Reel Dimensions - 7 inch**

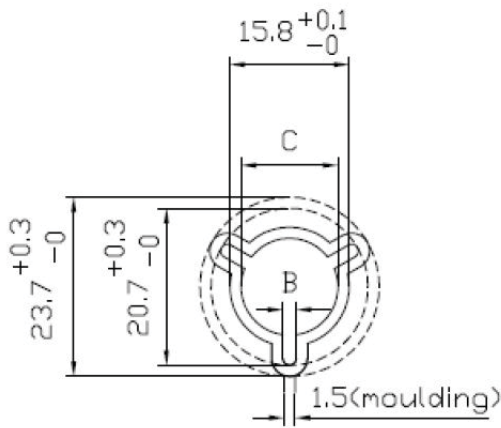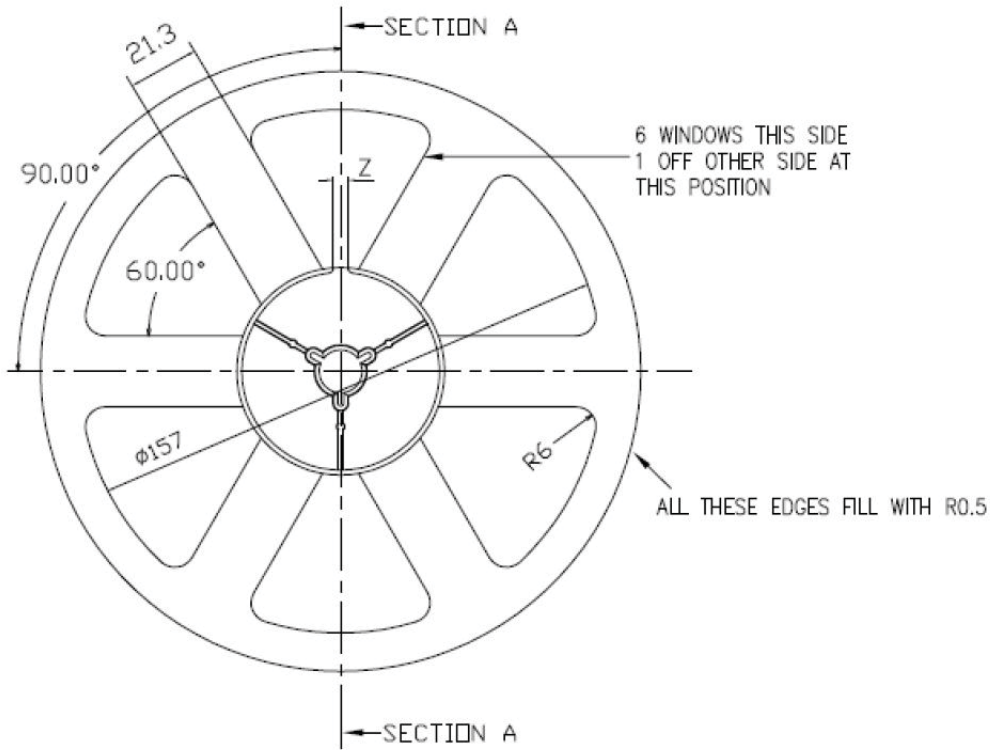

HUB DETAIL

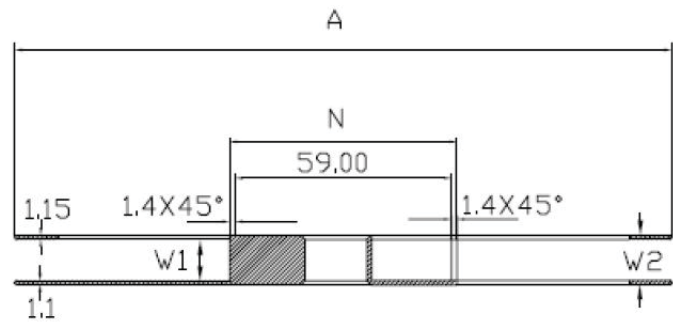

SECTION A

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2010 Avago Technologies. All rights reserved. AV02-2245EN - April 29, 2010

