


ESD-SAFE™ MLC Chips



ESD Withstanding Automotive Ceramic Capacitor

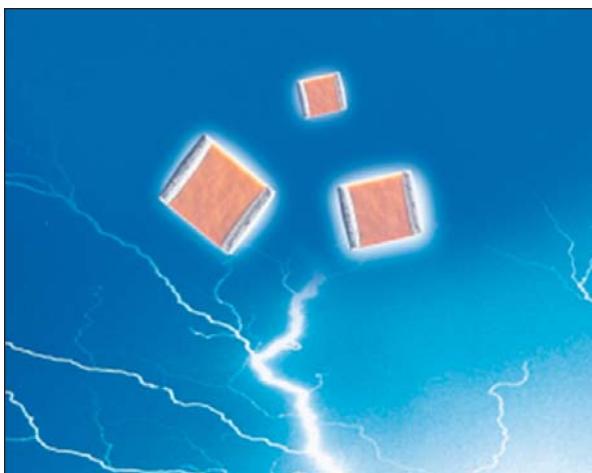

The ESD-Safe™ series is an enhanced MLC capacitor developed and designed specifically for general ESD protection. (ESD = Electro Static Discharge).

ESD-Safe™ capacitors are utilized for ESD protection of I/O gates. ESD capacitors are used on nearly every pin of an automotive module. Their use at that point averages the voltage that the wiring harness can be charged to and the module voltage.

The small footprint makes them ideal for high density electronic devices.

Capacitance selection is a trade off. Large capacitance values provide better ESD protection however a larger could corrupt the data stream.

ESD-Safe™ Capacitors provide (beside ESD protection) RF filtering function.

GENERAL CHARACTERISTICS

Operating Temperature: -55°C to 125°C

Capacitance Variation: ±15% (X7R)

FEATURES

- AEC Q200 Qualified
- ESD Qualified per HBM of AEC Q200-002
- ISO 10605 (uses both 330pf/2kohm and 150pf/2kohm networks)*
- EN61000-4 -2 (uses 150pf/330 Ohm network)*

*Contact factory for ESD performance

APPLICATIONS

- General ESD protection of I/O gates

HOW TO ORDER

ESD	3	3	C	104	K	4	Z	2	A	18
Type ESD Applications	Case Size 3 = 0603 5 = 0805 6 = 1206	Voltage Z = 10V Y = 16V 3 = 25V 5 = 50V	Dielectric X7R = C	Capacitance Code (In pF) 2 Sig. Digits + Number of Zeros e.g. 1000pF = 102	Capacitance Tolerance J = ±5% K = ±10% M = ±20%	Failure Rate 4 = Automotive	Terminations T = 100% Sn Z = FLEXITERM®	Packaging 2 = 7" Reel 4 = 13" Reel	Special Code A = Std. Product	ESD rating (kV) 18 = 18kV 20 = 20kV 22 = 22kV 24 = 24kV 26 = 26kV 28 = 28kV 30 = 30kV

ESD-SAFE™ X7R RANGE

Capacitance	0603			0805			1206			
	Code	Value	50V	100V	25V	50V	100V	25V	50V	100V
472	4.7 (nF)	18kV	18kV	18kV	18kV	18kV	20kV	20kV	20kV	20kV
682	6.8	18kV	18kV	18kV	18kV	18kV	20kV	20kV	20kV	20kV
103	10	18kV	18kV	18kV	18kV	18kV	20kV	20kV	20kV	20kV
153	15	20kV		20kV	20kV	20kV	22kV	22kV	22kV	22kV
223	22	20kV		22kV	22kV	22kV	24kV	24kV	24kV	24kV
333	33	20kV		22kV	22kV	22kV	24kV	24kV	24kV	24kV
473	47	22kV		22kV	22kV	22kV	26kV	26kV	26kV	26kV
683	68	22kV		24kV	24kV	24kV	26kV	26kV	26kV	26kV
104	100	24kV		24kV	24kV	24kV	26kV	26kV	26kV	26kV
154	150			24kV	24kV	24kV	28kV	28kV	28kV	28kV
224	220			26kV	26kV	26kV	28kV	28kV	28kV	28kV
334	330			26kV	26kV	26kV	28kV	28kV	28kV	28kV
474	470			26kV	26kV	26kV	28kV	28kV	28kV	28kV
684	680			26kV			28kV	28kV	28kV	28kV
105	1 (μF)			26kV			28kV	28kV	28kV	28kV
155	1.5						30kV			
225	2.2						30kV			



LEAD-FREE
COMPATIBLE
COMPONENT



RoHS
COMPLIANT

For RoHS compliant products,
please select correct termination style.

