

*New Jersey Semi-Conductor Products, Inc.*

20 STERN AVE.  
 SPRINGFIELD, NEW JERSEY 07081  
 U.S.A.


TELEPHONE: (201) 376-2  
 (212) 227-6  
 FAX: (201) 376-8

PARAMETERS

1N6071A  
 BIDIRECTIONAL TRANSIENT SUPPRESSOR

Description: Bidirectional Transient Suppressor

Manufacturer.....	
Mil/High-Rel? (Y/N).....	
Vbr Nom.....	200
@I <sub>r</sub> (test).....	1.0m
Reverse Standoff Voltage.....	170
I <sub>pp</sub> Max. (A).....	5.1
Nom. Clamp Volt.....	294
@I <sub>pp</sub> (test).....	5.1
t(resp) (S).....	5.0n
Mat.....	Silicon
Pkg Style.....	DO-13
Surface Mounted (Y/N).....	N

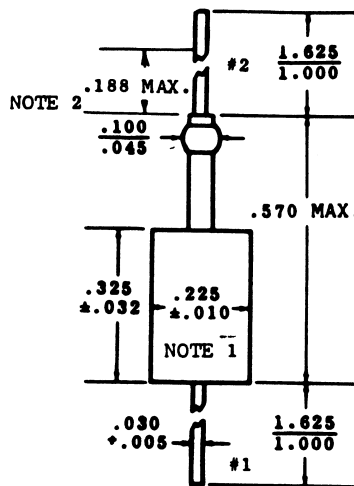

NOTES: (for DO13)

1. The major diameter is essentially constant along its length.
2. Within this zone diameter may vary to allow for lead finishes and irregularities.
3. Dimension to allow for pinch or seal deformation anywhere along tabulation.

