


DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.
7/24/00	-	ISSUED		NT	DG

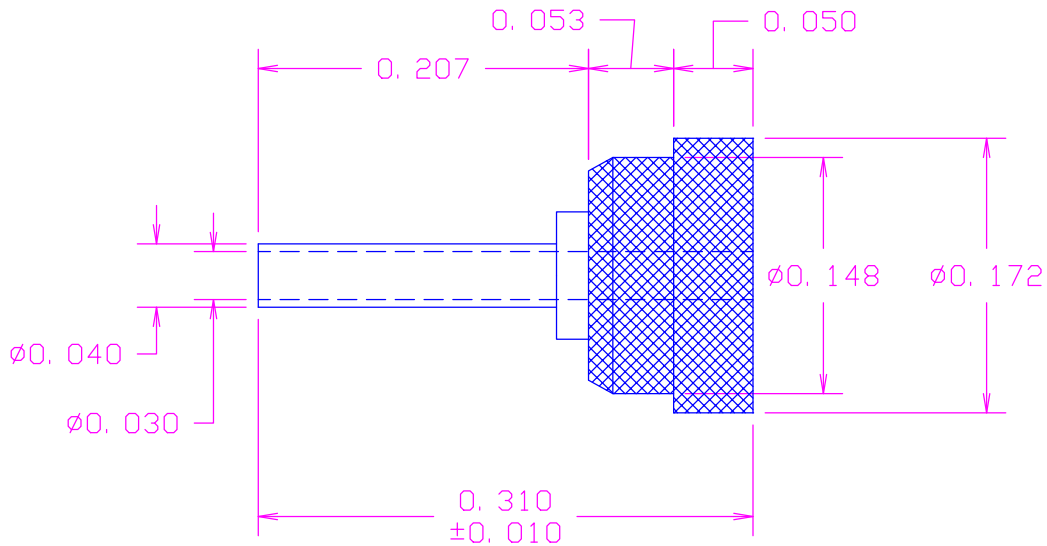

RECOMMENDED HOLE SIZE
FOR PRESS FIT INSERTION




MATERIAL: PIN- BRASS PER ASTM B16,
ALLOY C 36000, 1/2 HARD

BUSHING- PTFE PER ASTM D1710

COLOR(XX)-SEE COLOR CODE

FINISH: PIN- .0003"MIN. ELECTRO-SOLDER

PER MIL-P-81728, OVER .0001"MIN. COPPER

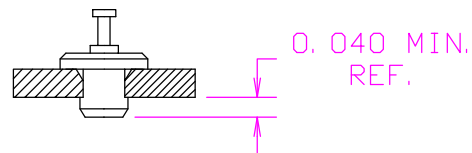

FOR BOARD THICKNESS GREATER THAN .040, X=60°

FOR BOARD THICKNESS LESS THAN .040, X=80°

(XX)COLOR CODE:
10-BLACK
11-BROWN
12-RED
13-ORANGE
14-YELLOW
15-GREEN
16-BLUE
17-VIOLET
18-GRAY
19-WHITE(NATURAL)

ACTUAL SIZE



TOLERANCES (EXCEPT AS NOTED)		CONCORD		ELECTRONICS CORPORATION	
DECIMAL + - .005		P/N		SCALE	30 GREAT JONES ST. NEW YORK N. Y. 10012
FRACTIONAL + - 1/64		TITLE TERMINAL, PTFE INSULATED			
ANGULAR + - 5°		DATE 7/21/00	DRAWING NUMBER 1114R-20-05XX		