



ASH-70 Series Pitch 7.62mm

Specifications



BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0), BLACK
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 16-22 STR.
 RATING: 10 AMPERES, 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000
 INSULATION RESISTANCE 500MΩ OR MORE AT DC 500V

MOUNTING END & BARRIER
 END ARE BOTH AVAILABLE



ASH-701

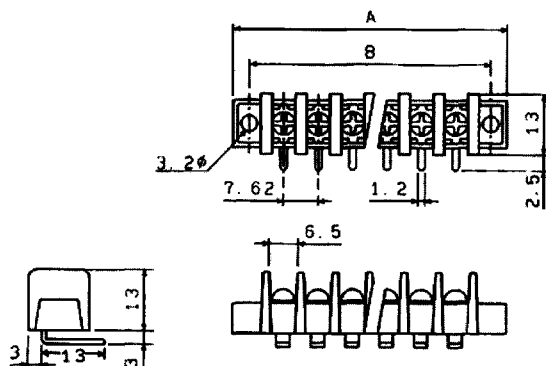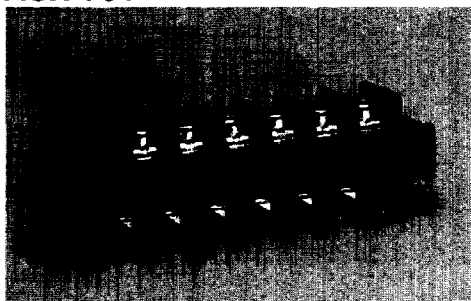



ASH-702

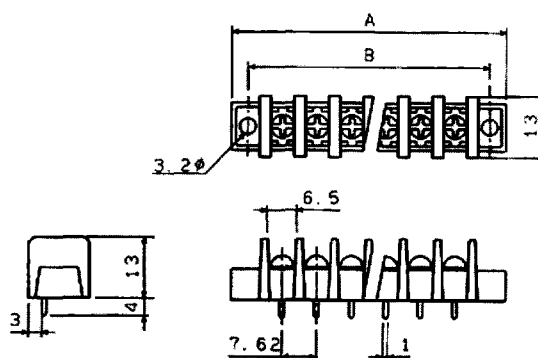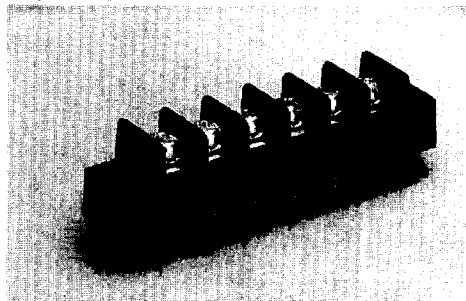

ASH-703

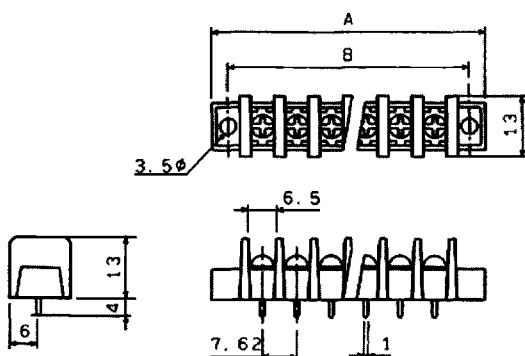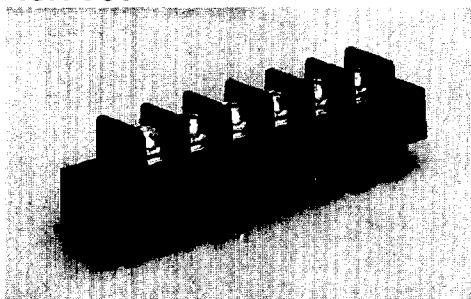


ASH-704


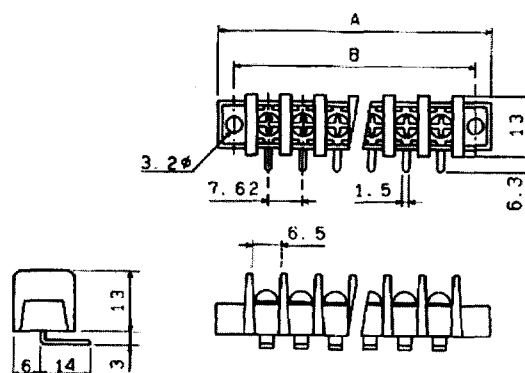
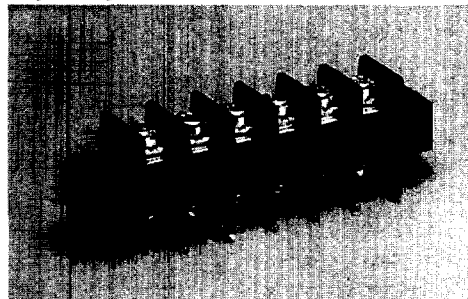


ASH-70 Series continued....

ASH-705

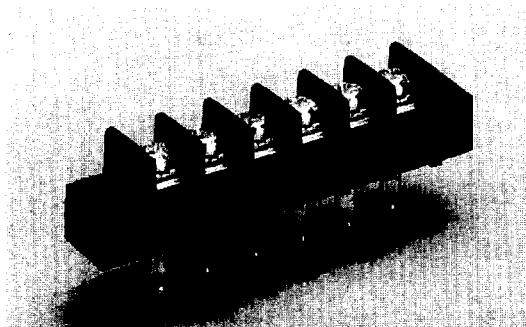

ASH-706

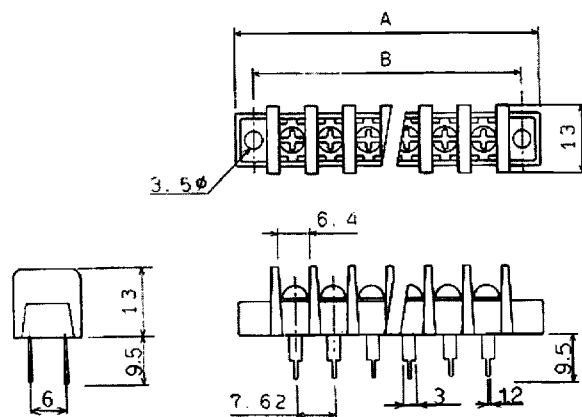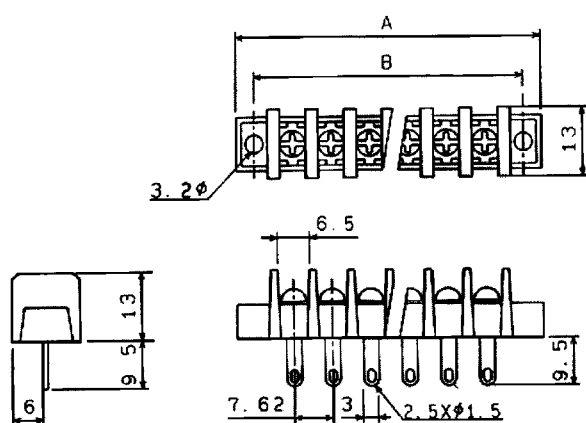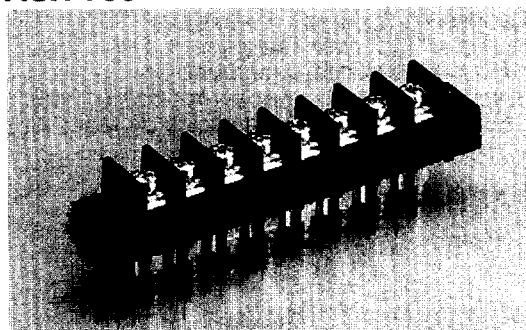

DIMENSION: ± 0.8mm

Pole	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	28.86	36.48	44.1	51.72	59.34	66.96	74.58	82.2	89.82	97.44	105.06	112.68	120.3	127.92
B	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44	99.06	106.68	114.3	121.92

Pole	16	17	18	19	20	21	22	23	24	25	26	27	28
A	135.54	143.16	150.78	158.4	166.02	173.64	181.26	188.88	196.5	204.12	211.74	219.36	226.98
B	129.54	137.16	144.78	152.4	160.02	167.64	175.26	182.88	190.5	198.12	205.74	213.36	220.98