

2SK879

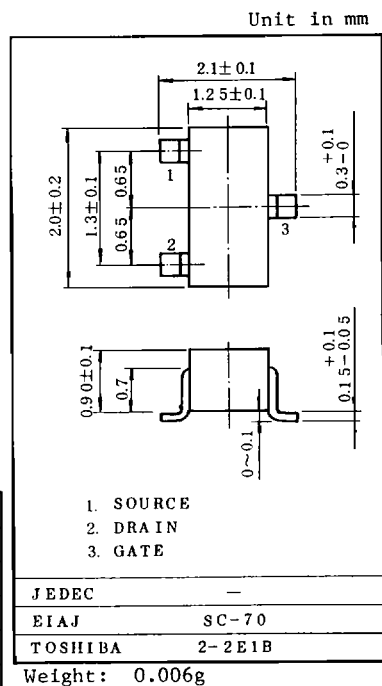
SILICON N CHANNEL JUNCTION TYPE

GENERAL PURPOSE AND IMPEDANCE CONVERTER
AND CONDENSER MICROPHONE APPLICATIONS.

- High Breakdown Voltage: $V_{GDS} = -50V$
- High Input Impedance: $I_{GSS} = -1.0nA$ (Max.)
($V_{GS} = -30V$)
- Low Noise: $NF = 0.5dB$ (Typ.) ($R_g = 100k\Omega$, $f = 120Hz$)
- Small Package.

MAXIMUM RATINGS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Gate-Drain Voltage	V_{GDS}	-50	V
Gate Current	I_G	10	mA
Drain Power Dissipation	P_D	100	mW
Junction Temperature	T_j	125	$^\circ C$
Storage Temperature Range	T_{stg}	-55~125	$^\circ C$



ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current	I_{GSS}	$V_{GS} = -30V$, $V_{DS} = 0$	—	—	-1.0	nA
Gate-Drain Breakdown Voltage	$V_{(BR)GDS}$	$V_{DS} = 0$, $I_G = -100\mu A$	-50	—	—	V
Drain Current	I_{DSS} (Note)	$V_{DS} = 10V$, $V_{GS} = 0$	0.3	—	6.5	mA
Gate-Source Cut-off Voltage	$V_{GS(OFF)}$	$V_{DS} = 10V$, $I_D = 0.1\mu A$	-0.4	—	-5.0	V
Forward Transfer Admittance	$ Y_{fs} $	$V_{DS} = 10V$, $V_{GS} = 0$, $f = 1kHz$	1.2	—	—	mS
Input Capacitance	C_{iss}	$V_{DS} = 10V$, $V_{GS} = 0$, $f = 1MHz$	—	8.2	—	pF
Reverse Transfer Capacitance	C_{rss}	$V_{GD} = -10V$, $I_D = 0$, $f = 1MHz$	—	2.6	—	pF
Noise Figure	NF	$V_{DS} = 15V$, $V_{GS} = 0$ $R_g = 100k\Omega$, $f = 120Hz$	—	0.5	—	dB

Note: I_{DSS} Classification






R: 0.30~0.75, O: 0.60~1.40

Y: 1.2~3.0, G: 2.6~6.5

Marking



STATIC CHARACTERISTICS

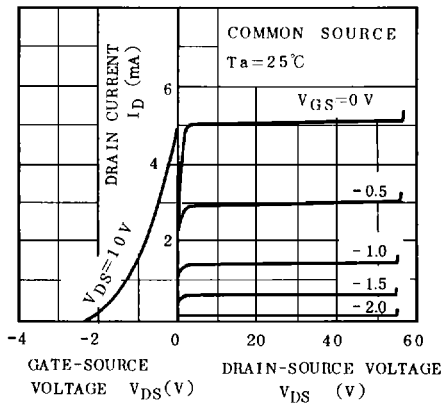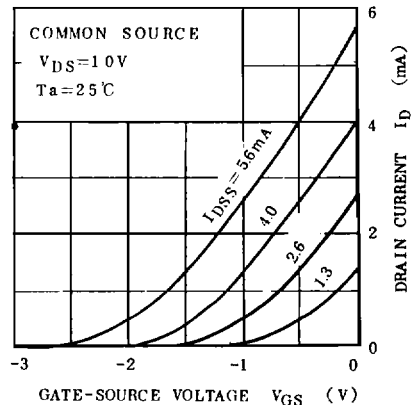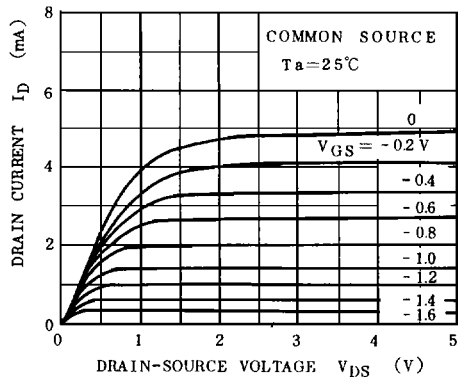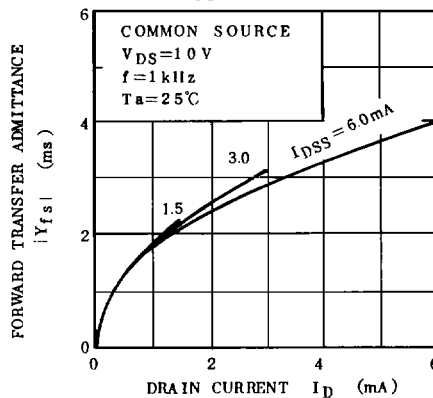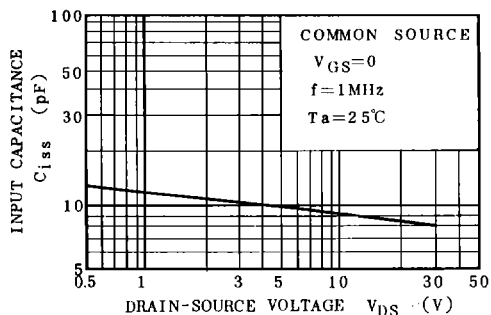 $I_D - V_{GS}$  $I_D - V_{DS}(\text{LOW VOLTAGE REGION})$  $|Y_{fs}| - I_D$  $C_{iss} - V_{DS}$  $C_{rss} - V_{GD}$ 