

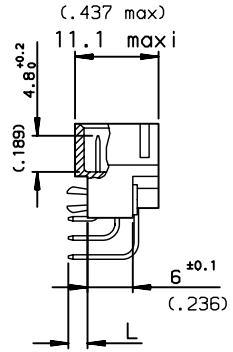


DIMENSIONS mm (inches)

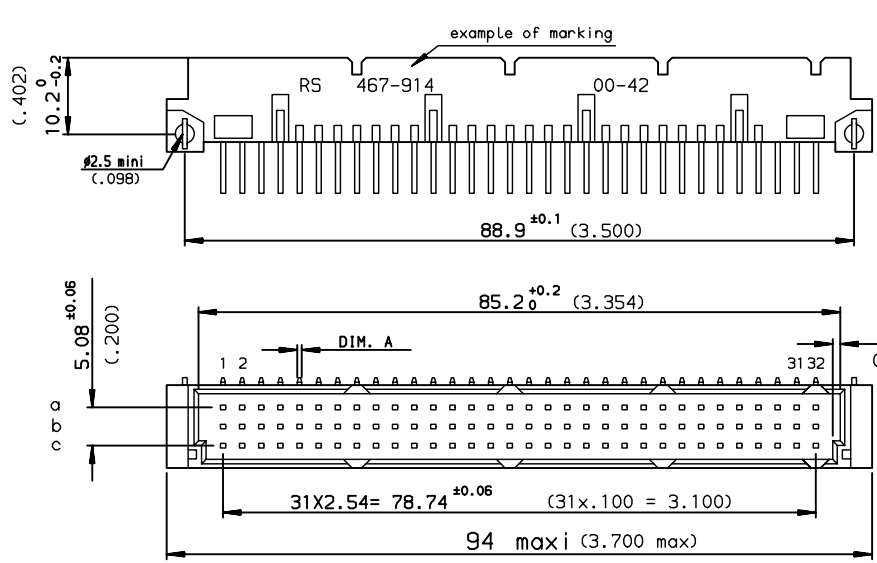

PCB DRILLING

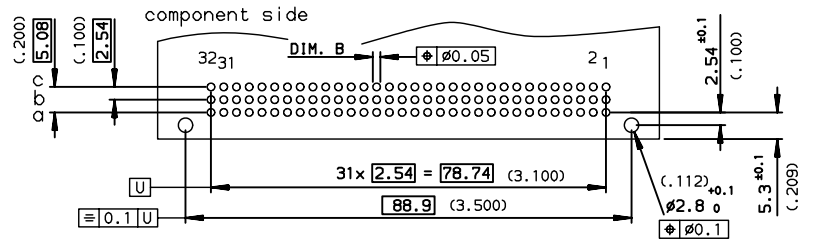

PART NUMBER	8609	71	5
PIN OUT	rows a-b-c	3	96
	rows a-c	4	64
NUMBER OF CONTACTS			
TERMINATION	L = 2.75 ±0.15 (.108)	A = $\varnothing 0.6^{0-0.08}$	B = $\varnothing 0.8^{0+0.3}$
OPTIONS	no option		7
	with harpoons	— for PCB thickness 1.6 mm	H
PERFORMANCE CLASS	DIN 41612 class 3		4
	DIN 41612 class 2		5
	DIN 41612 class 1		6
TERMINATION TYPE	TIN LEAD		-485E1
	LEAD FREE		-ATLF

SPECIFICATION 485 or ATLF

specific marking : customer part number + date code

GENERAL CHARACTERISTICS and ROHS INFORMATIONS
SEE DRAWING C-8609-0000A

European Views

rev	ecn no	dr	date
A	-	ROU	2000/11/20
B	LS07-0130	HLE	2007/06/04
C	LS07-0211	HLE	2007/08/09
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302 <input checked="" type="checkbox"/>	tolerance std ISO 406 ISO 1101	projection 	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	2000/11/20	ANGULAR	0.X	±0.1
Eng	ROUILLARD	2000/11/20	LINEAR	0.XX	±0.1
Chr	LEGARE	2000/11/20	0.XX' ±2'	0.XXX	±0.1
Appr	LEGARE	2000/11/20	Product family	DIN	Spec ref -
		title RIGHT ANGLE MALE STYLE C		dwg no	C-8609-0849
catalog no		SEE TABLE		CUSTOMER	sheet 1 of 1

Copyright FCI. FCJ