



ASH-61 Series Pitch 6.35mm

Specifications



BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0), BLACK
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 18-22 STR.
 RATING: 10 AMPERES, 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000
 INSULATION RESISTANCE 500MΩ OR MORE AT DC 500V

MOUNTING END & BARRIER
 END ARE BOTH AVAILABLE


ASH-611

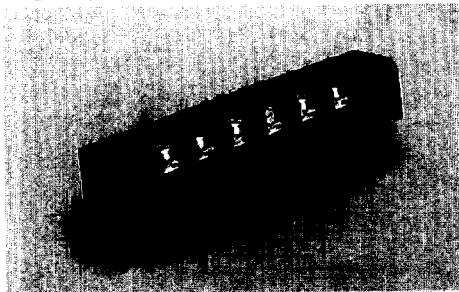



ASH-612

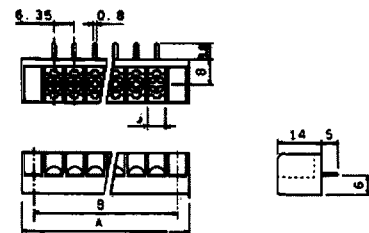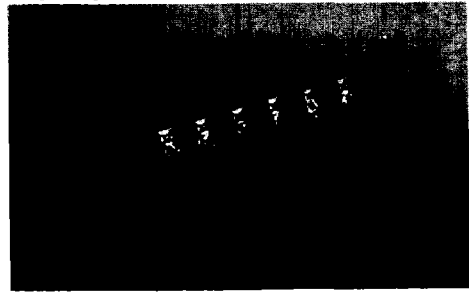

ASH-613

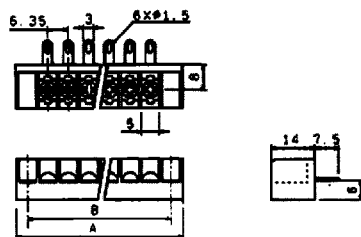

ASH-614

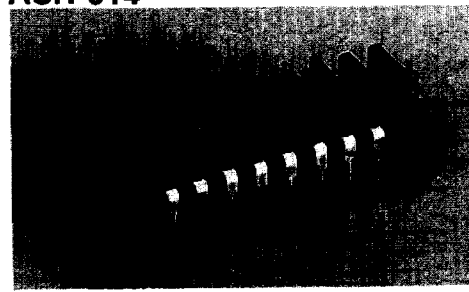

DIMENSION: $\pm 0.8\text{mm}$

Pole	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	25.5	32	38	44.5	51	57	63.5	70	76	82	89	95	101.5	108	114
B	19.05	25.4	31.74	38.1	44.45	50.8	57.15	63.5	69.85	76.2	82.55	88.9	95.25	101.6	107.95

Pole	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	120	127	133	139	146	152	158.5	165	171	177	184	191	202	222
B	114.3	120.65	127	133.35	139.7	146.05	152.4	158.75	165.1	171.45	177.8	184.15	191	196.85