


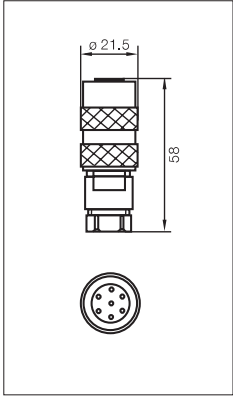


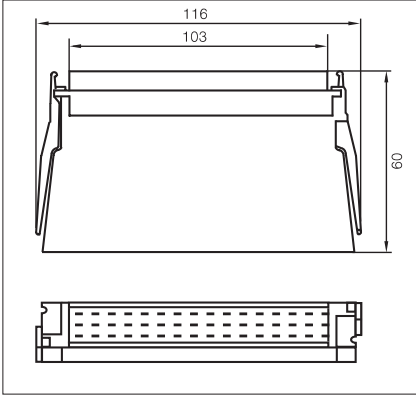

Connectors

Order code	BKS-S 30-00	BKS-S 39-00	BKS-S 52-00
Application	return line for Expander Module (with housing) BIS F-963	for connection to Processor BIS F-420-000-E-Exi	control signals Processors BIS F-420/450-000-A-Exi
			
Connector type	round-connector	edge connector form F48	MIN D-plug
Version	7-pin, female	48-pin, style F, female, DIN 41 612 (IEC 603)	25-pin, female
recommended cable	LiYCY-0	LiYCY-0	LiYCY-0
Conductor cross section	0.75 mm ²	1.5 mm ²	0.5 mm ²
Protection* per IEC 529	IP 67	IP 20	IP 40
ambient temperature range	-40...+85 °C	-40...+85 °C	-40...+85 °C
*only when connected			

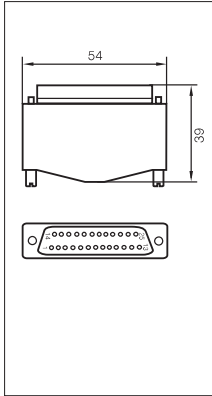

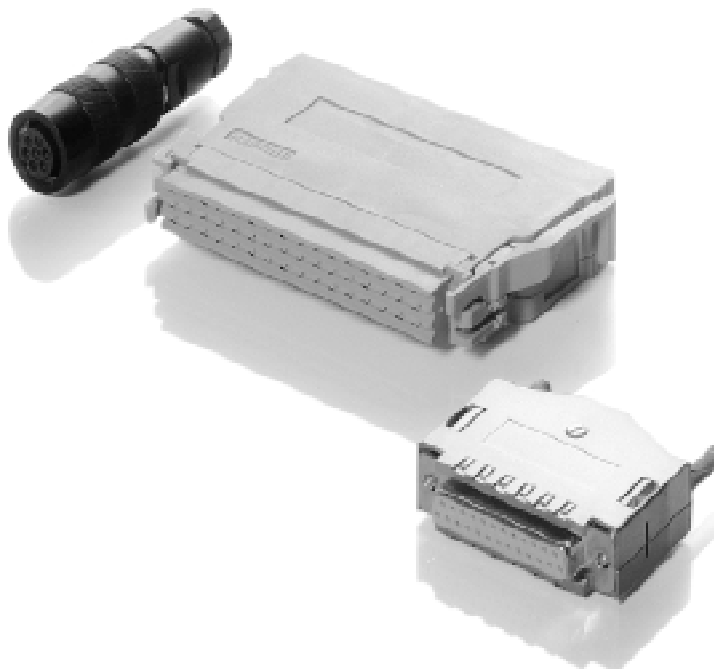

Connectors

Order code	BKS-S 58-00	BKS-S 59-00	BKS-S 60-00	BKS-S 61-00
Application	for connecting Read Head to all Processors BIS-F with connector ports	controller to Expander Module (with housing) BIS F-963	selector to Expander Module (with housing) BIS F-963	extension to BKS-S 58-00
Connector type	round-connector	round-connector	round-connector	round-connector
Version	5-pin, male	6-pin, female	5-pin, female	5-pin, female
recommended cable	LiYCY-0	LiYCY-0	LiYCY-0	LiYCY-0
Conductor cross sect.	0.75 mm ²	0.75 mm ²	0.75 mm ²	0.75 mm ²
Protection* per IEC 529	IP 40	IP 67	IP 67	IP 40
ambient temp. range	-40...+85 °C	-40...+85 °C	-40...+85 °C	-40...+85 °C
*only when connected				

