

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


,19 .

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		G	REV / 0720-0953-96	20JUN96	ME	BB

AMP WIRE RANGE	 E13288	 LR7189 Certified
SOLID OR STRANDED	SOLID OR STRANDED	SOLID OR STRANDED

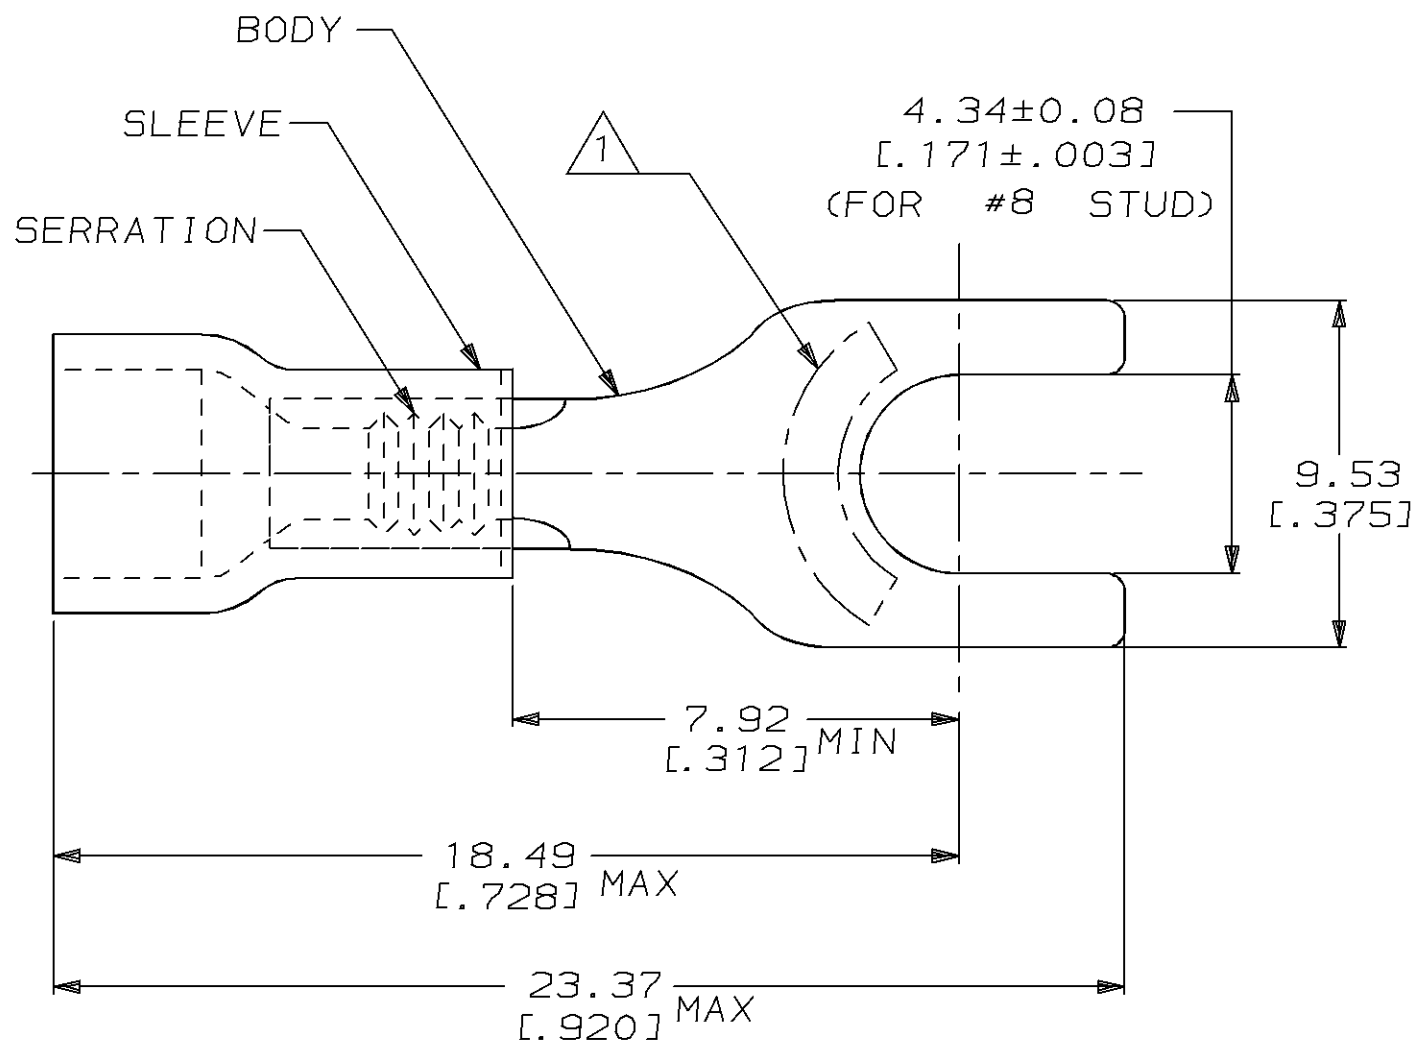

1 STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPEC MIL-T-7928
COMMERCIAL WIRE RANGE IS 22-16

2. WIRE INSUL DIA, 2.67 TO 3.56 [.105 TO .140]

3. TONGUE MATL THK, 0.79 ± 0.05 [.031 ± .002]

4 SUPERSEDED BY 8-34155-5

50	LOOSE PIECE, BAG	8-34155-5
5	LOOSE PIECE, BLS	8-34155-4
100	LOOSE PIECE, BOX	8-34155-1
5000	ON TAPE, REEL	2-34155-1
1000	LOOSE PIECE	34155
QTY	PACKAGE TYPE	PART NO

4

AMP INCORPORATED CUSTOMER SERVICE SYSTEM

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142


MAX RECOMMENDED OPERATING
TEMPERATURE:
90°C [194°F]

VOLTAGE RATING:
600V MAX
(1000V FIXTURE OR SIGN)

CIRCULAR MIL AREA:
0.26mm² - 1.65mm²
[509 - 3260]

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mm [in]



MATERIAL
BODY, CU PER ASTM B152
SLEEVE, PVC, RED

TOLERANCES UNLESS
OTHERWISE SPECIFIED,

0 PLC ±-
1 PLC ±-
2 PLC ±0.20 [.008]
3 PLC ±-
4 PLC ±-
ANGLES ±-
FINISH -

DWN 07NOV94

CHK 07NOV94

M ELLIS

APVD 07NOV94

G NGO

PRODUCT SPEC

UL 486A

APPLICATION SPEC

-

WEIGHT -

CUSTOMER DRAWING

AMP AMP Incorporated
Harrisburg, PA 17105-3608

NAME
TERMINAL, SPADE,
PLASTI-GRIP,
WIRE SIZE, 22-16 AWG

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-34155

SCALE
6:1

SHEET
1 OF 1

REV
G