



TY Variable Capacitance Diode

- For tuning of extended frequency band in VHF TV / VTR tuners
- High capacitance ratio
- Low series inductance
- Low series resistance
- Excellent uniformity and matching due to "in-line" matching assembly procedure

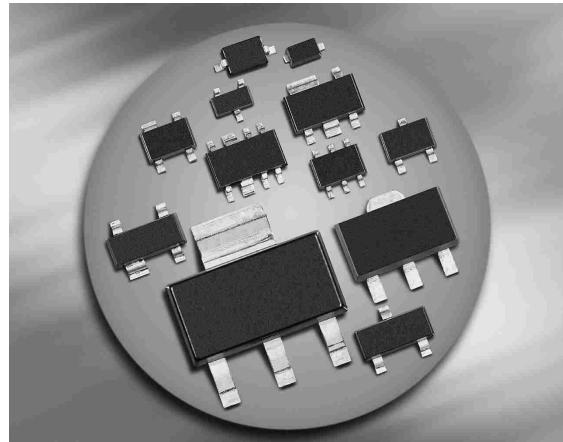

BB639

BB659



Type	Package	Configuration	L_s (nH)	Marking
BB639	SOD323	single	1.8	yellow S
BB659	SCD80	single	0.6	DE

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	30	V
Peak reverse voltage ($R \geq 5\text{k}\Omega$)	V_{RM}	35	
Forward current	I_F	20	mA
Operating temperature range	T_{op}	-55 ... 150	°C
Storage temperature	T_{stg}	-55 ... 150	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC Characteristics

Reverse current $V_R = 30 \text{ V}$ $V_R = 30 \text{ V}, T_A = 85^\circ\text{C}$	I_R	-	-	10 200	nA
---	-------	---	---	-----------	----

AC Characteristics

Diode capacitance $V_R = 1 \text{ V}, f = 1 \text{ MHz}$ $V_R = 2 \text{ V}, f = 1 \text{ MHz}$ $V_R = 25 \text{ V}, f = 1 \text{ MHz}$ $V_R = 28 \text{ V}, f = 1 \text{ MHz}$	C_T	36 27.7 2.5 2.4	38.3 29.75 2.85 2.6	40 31.8 3.2 2.9	pF
Capacitance ratio $V_R = 1 \text{ V}, V_R = 28 \text{ V}, f = 1 \text{ MHz}$	C_{T1}/C_{T28}	13.5	14.7	-	
Capacitance ratio $V_R = 2 \text{ V}, V_R = 25 \text{ V}, f = 1 \text{ MHz}$	C_{T2}/C_{T25}	9.8	10.4	-	
Capacitance matching ¹⁾ $V_R = 1 \text{ V}, V_R = 28 \text{ V}, f = 1 \text{ MHz}, 7$ diode sequence BB639 $V_R = 1 \text{ V}, V_R = 28 \text{ V}, f = 1 \text{ MHz}, 4$ diode sequence BB659 $V_R = 1 \text{ V}, V_R = 28 \text{ V}, f = 1 \text{ MHz}, 7$ diode sequence BB659	$\Delta C_T/C_T$	- - - -	- 0.3 0.4	2.5 1 2	%
Series resistance $V_R = 5 \text{ V}, f = 470 \text{ MHz}$	r_S	-	0.65	0.7	Ω

¹For details please refer to Application Note 047.