



## Precision Thin Film Non-Magnetic Resistor, Surface Mount Chip, $\pm 25 \text{ ppm}/^\circ\text{C}$ , Tolerances to 0.1 %

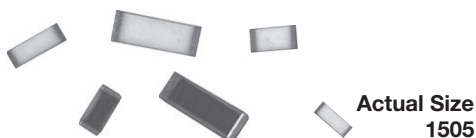

These devices eliminate materials that would disturb magnetic fields applications such as in MRI magnetic resonance imaging machines. The PNM series chip resistor has been carefully engineered with non-magnetic materials to eliminate the effects of these stray magnetic fields on circuit performance, thereby resulting in simplified shielding requirements and improved sound quality in audio applications. Providing signal conditioning without distortion from magnetic fields.

### CONSTRUCTION

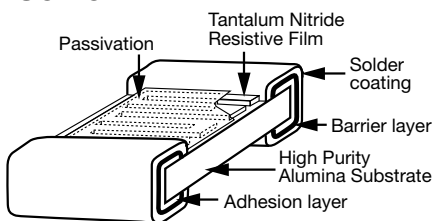

### FEATURES

- Non-magnetic
- Moisture resistant
- High purity alumina substrate
- Non-standard values available
- Will pass + 85 °C, 85 % relative humidity and 10 % rated power
- 100 % visual inspected per MIL-PRF-55342
- Very low noise and voltage coefficient ( $< -30 \text{ dB}$ )
- Non-inductive
- Laser-trimmed tolerances to  $\pm 0.1 \%$
- Wraparound resistance less than  $10 \text{ m}\Omega$
- Halogen-free according to IEC 61249-2-21 definition
- Compliant to RoHS directive 2002/95/EC



### TYPICAL PERFORMANCE

	ABSOLUTE
TCR	25
TOL.	0.1

STANDARD ELECTRICAL SPECIFICATIONS		
TEST	SPECIFICATIONS	CONDITIONS
Material	Tantalum nitride	-
Resistance Range	10 $\Omega$ to 3 M $\Omega$	-
TCR: Absolute	$\pm 25 \text{ ppm}/^\circ\text{C}$ to $\pm 100 \text{ ppm}/^\circ\text{C}$	-55 °C to +125 °C
Tolerance: Absolute	$\pm 0.1 \%$ to $\pm 1.0 \%$	+25 °C
Stability: Absolute	$\Delta R \pm 0.03 \%$	-
Stability: Ratio	-	-
Voltage Coefficient	0.1 ppm/V	-
Working Voltage	75 V to 200 V	-
Operating Temperature Range	-55 °C to +125 °C	-
Storage Temperature Range	-55 °C to +150 °C	-
Noise	$< -30 \text{ dB}$	-
Shelf Life Stability: Absolute	-	-

COMPONENT RATINGS			
CASE SIZE <sup>(1)</sup>	POWER RATING (mW)	WORKING VOLTAGE (V)	RESISTANCE RANGE ( $\Omega$ )
0402	50	75	20 to 35K
0502	100	75	20 to 65K
0505	150	75	20 to 130K
0603	150	75	10 to 100K
0805	200	100	10 to 301K
0705	200	100	10 to 301K
1005	250	100	10 to 301K
1010	500	150	50 to 600K
1206	400	200	10 to 1M
1505	400	150	10 to 1M
2208	750	150	10 to 1.75M
2010	800	200	10 to 2M
2512	1000	200	10 to 3M

**Note**

<sup>(1)</sup> 0705 and 0805 are the same (only use 0805 when ordering)

\* Pb containing terminations are not RoHS compliant, exemptions may apply

Precision Thin Film Non-Magnetic Resistor,  
Surface Mount Chip,  $\pm 25$  ppm/ $^{\circ}\text{C}$ , Tolerances to 0.1 %



Vishay Thin Film

<b>DIMENSIONS</b> in inches					
CASE SIZE	L	W	T	D	E
0402	$0.042 \pm 0.008$	$0.022 \pm 0.005$	0.012 to 0.033	$0.010 \pm 0.005$	$0.010 \pm 0.005$
0502	$0.055 \pm 0.006$	$0.025 \pm 0.005$	0.012 to 0.033	$0.010 \pm 0.005$	$0.015 \pm 0.005$
0505	$0.055 \pm 0.006$	$0.050 \pm 0.005$	0.012 to 0.033	$0.010 \pm 0.005$	$0.015 \pm 0.005$
0603	$0.064 \pm 0.006$	$0.032 \pm 0.005$	0.020 Max.	$0.012 \pm 0.005$	$0.015 \pm 0.005$
0705, 0805 <sup>(1)</sup>	$0.080 \pm 0.006$	$0.050 \pm 0.005$	0.015 to 0.033	$0.015 \pm 0.005$	$0.015 \pm 0.005$
1005	$0.105 \pm 0.007$	$0.050 \pm 0.005$	0.015 to 0.033	$0.015 \pm 0.005$	$0.015 \pm 0.005$
1010	$0.105 \pm 0.007$	$0.100 \pm 0.005$	0.015 to 0.033	$0.015 \pm 0.005$	$0.015 \pm 0.005$
1206	$0.126 \pm 0.008$	$0.063 \pm 0.005$	0.015 to 0.033	$0.020 + 0.005/- 0.010$	$0.020 + 0.005/- 0.010$
1505	$0.155 \pm 0.007$	$0.050 \pm 0.005$	0.015 to 0.033	$0.015 \pm 0.005$	$0.015 \pm 0.005$
2010	$0.209 \pm 0.009$	$0.098 \pm 0.005$	0.015 to 0.033	$0.020 \pm 0.005$	$0.020 \pm 0.005$
2208	$0.230 \pm 0.007$	$0.075 \pm 0.005$	0.015 to 0.033	$0.020 \pm 0.005$	$0.020 \pm 0.005$
2512	$0.259 \pm 0.009$	$0.124 \pm 0.005$	0.015 to 0.033	$0.020 \pm 0.005$	$0.020 \pm 0.005$

**Note**

<sup>(1)</sup> 0705 and 0805 are the same (only use 0805 when ordering)

<b>ENVIRONMENTAL TESTS</b> (Vishay Performance vs. MIL-PRF-55342 Requirements)		
ENVIRONMENTAL TEST	LIMITS MIL-PRF-55342 CHARACTERISTIC "H"	TYPICAL VISHAY PERFORMANCE
Resistance Temperature Characteristic	$\pm 50$ ppm/ $^{\circ}\text{C}$	$\pm 35$ ppm/ $^{\circ}\text{C}$
Max. Ambient Temperature at Rated Wattage	+ 70 $^{\circ}\text{C}$	+ 70 $^{\circ}\text{C}$
Max. Ambient Temperature at Power Derating	+ 150 $^{\circ}\text{C}$	+ 150 $^{\circ}\text{C}$
Thermal Shock $\Delta R$	$\pm 0.25$ %	$\pm 0.040$ %
Low Temperature Operation $\Delta R$	$\pm 0.25$ %	$\pm 0.005$ %
Short Time Overload $\Delta R$	$\pm 0.10$ %	$\pm 0.010$ %
High Temperature Exposure $\Delta R$	$\pm 0.20$ %	$\pm 0.150$ %
Resistance to Bonding Exposure $\Delta R$	$\pm 0.25$ %	$\pm 0.005$ %
Moisture Resistance $\Delta R$	$\pm 0.40$ %	$\pm 0.029$ %
Life + 70 $^{\circ}\text{C}$ at 1000 hours $\Delta R$	$\pm 0.50$ %	$\pm 0.03$ %
Insulation Resistance	10 000 $\Omega$ minimum	> 100 000 M $\Omega$

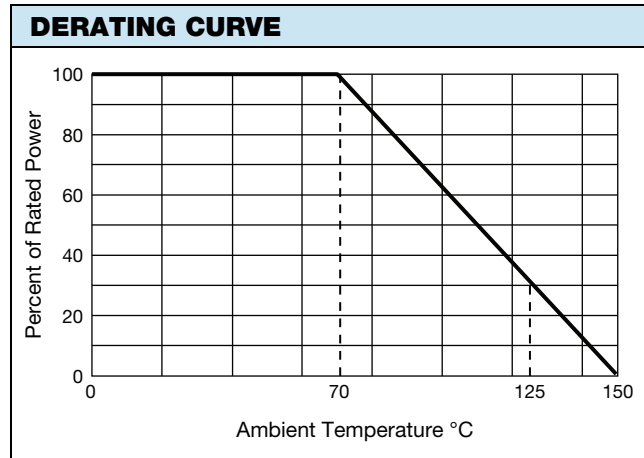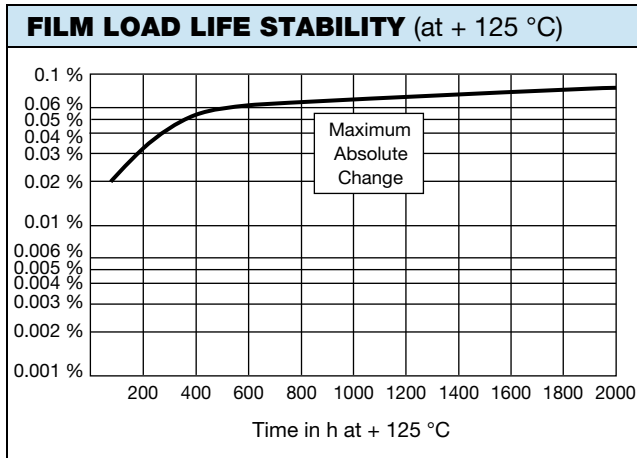

**GLOBAL PART NUMBER INFORMATION**

**P N M 1 2 0 6 E 1 0 0 2 B B T 1**

GLOBAL MODEL	CASE SIZE	TCR CHARACTERISTIC	RESISTANCE	TOLERANCE	TERMINATION	PACKAGING
<b>PNM</b> Non-magnetic resistor	<b>0402</b> <b>0502</b> <b>0505</b> <b>0603</b> <b>0805</b> <b>1005</b> <b>1010</b> <b>1206</b> <b>1505</b> <b>2208</b> <b>2010</b> <b>2512</b>	<b>E</b> = $\pm 25 \text{ ppm}/^\circ\text{C}$ <b>H</b> = $\pm 50 \text{ ppm}/^\circ\text{C}$ <b>K</b> = $\pm 100 \text{ ppm}/^\circ\text{C}$  < 50 $\Omega$  $\pm 100 \text{ ppm}/^\circ\text{C}$ best	The first 3 digits are significant figures and the last digit specifies the number of zeros to follow. "R" designates the decimal point.  Example: 10R0 = 10 $\Omega$ 1000 = 100 $\Omega$ 1001 = 1 k $\Omega$	<b>B</b> = $\pm 0.1 \%$ <b>D</b> = $\pm 0.5 \%$ <b>F</b> = $\pm 1 \%$ <b>G</b> = $\pm 2 \%$ <b>J</b> = $\pm 5 \%$	<b>B</b> = Wraparound Sn/Pb solder 63 % Sn/ 37 % Pb <b>S</b> = Wraparound lead (Pb)-free solder 96.5 % Sn/3.0 % Ag/ 0.5 % Cu RoHS compliant - e1	<b>BS</b> = BULK 100 min., 1 mult <b>WS</b> = WAFFLE 100 min., 1 mult  TAPE AND REEL <b>T0</b> = 100 min., 100 mult <b>T1</b> = 1000 min., 1000 mult <sup>(1)</sup> <b>T3</b> = 300 min., 300 mult <b>T5</b> = 500 min., 500 mult <b>TF</b> = Full reel <b>TS</b> = 100 min., 1 mult

**Note**

<sup>(1)</sup> Preferred packaging code



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.