



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## Product Specifications Approval Sheet


Product Name: 276.5 MHz 40MHz BW SMD 7.0 x 5.0 mm SAW IF Filter

TST Parts No.: TB1106A

Customer Parts No.: \_\_\_\_\_

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: \_\_\_\_\_ Kazuma Lee 

Approval by: \_\_\_\_\_ Francis Chen 

Date: \_\_\_\_\_ 11 / 24 / 2012

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



# TAI-SAW TECHNOLOGY CO., LTD.

No.3, Industrial 2nd Rd., Ping-Chen Industrial District, Taoyuan, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales3@mail.taisaw.com](mailto:tstsales3@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

SAW Filter 276.5MHz 40MHz BW (SMD 7.0x5.0 mm)

MODEL NO.: TB1106A

REV. NO.1

## A. MAXIMUM RATING:

1. Operating temperature range: -40°C to 85°C
2. Storage temperature range: -40°C to 85°C
3. Input Power Level : 10 dBm
4. Maximum DC Voltage : 10V

RoHS Compliant  
Lead free  
Lead-free soldering

Electrostatic Sensitive Device

## B. Characteristics :

Item	Unit	Min.	Type.	Max.
Center frequency, <b>Fc</b>	MHz	-	276.5	-
Insertion Loss, <b>IL</b>	dB	-	11.4	12.0
-1dB bandwidth	MHz	40	44	-
-3dB bandwidth	MHz	-	47	-
Passband Ripple Fc+/- 20MHz	dB	-	0.7	1.0
Attenuation:(Reference level from Min IL)				
DC ~ 236MHz	dB	40	54	-
316MHz ~ 500MHz	dB	40	49	-
500MHz ~ 1000MHz	dB	40	55	-
Fc-30MHz	dB	30	50	-
Fc+30MHz	dB	30	45	-
Temperature Coefficient	ppm/°C	-	-94	-
Source Impedance	Ohm	-	50	-
Load Impedance	Ohm	-	50	-

### C. Frequency Characteristics :

(1) Narrow band Response:(span 300MHz)

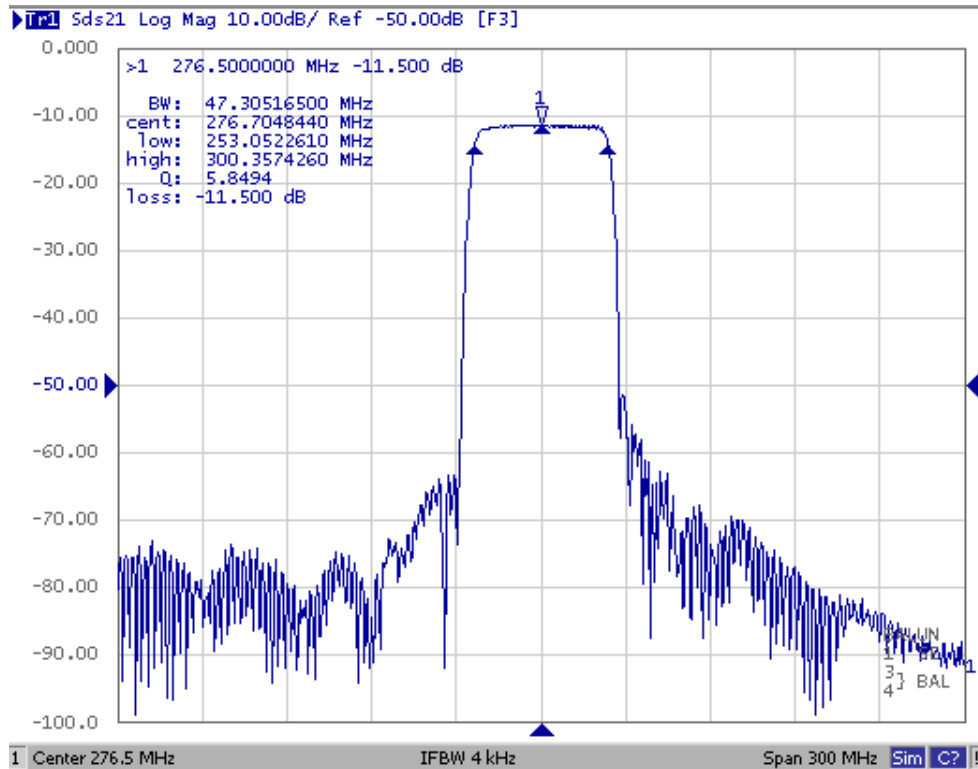


Fig1. Horizontal: 30MHz/Div Vertical: 10dB/Div

(2) Pass band Response and Group Time Delay response:


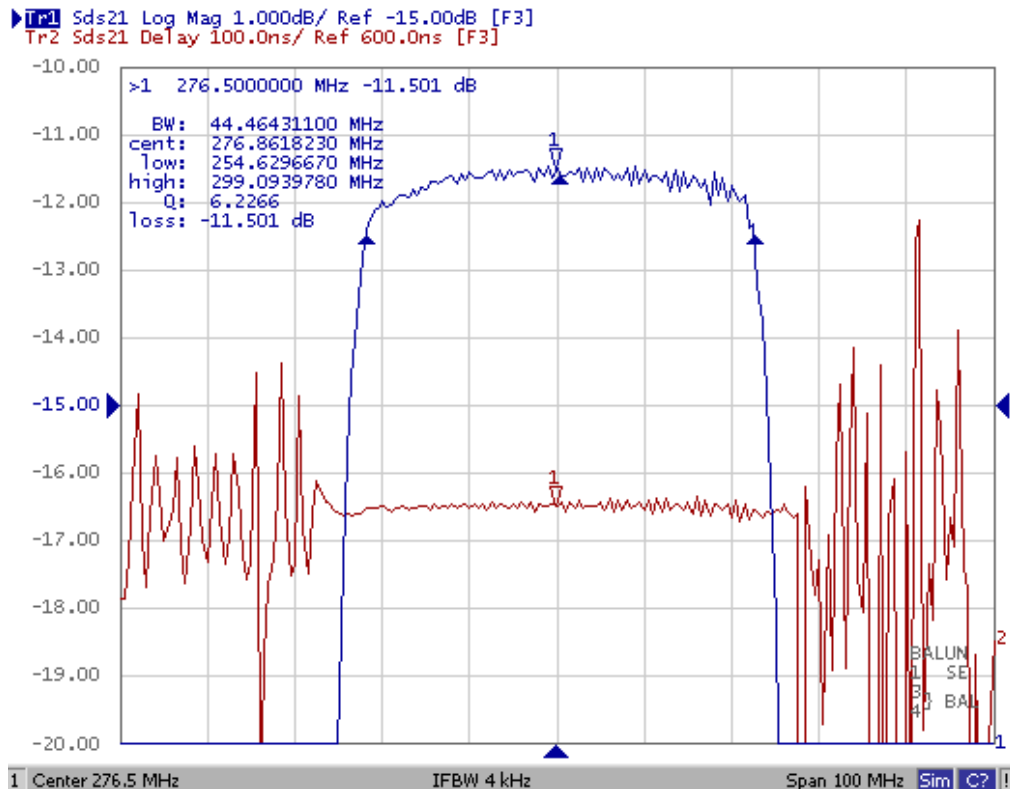


Fig2. Horizontal: 10MHz/Div Vertical: 1dB/Div  
Vertical: 100ns/Div

(3) Smith Chart:

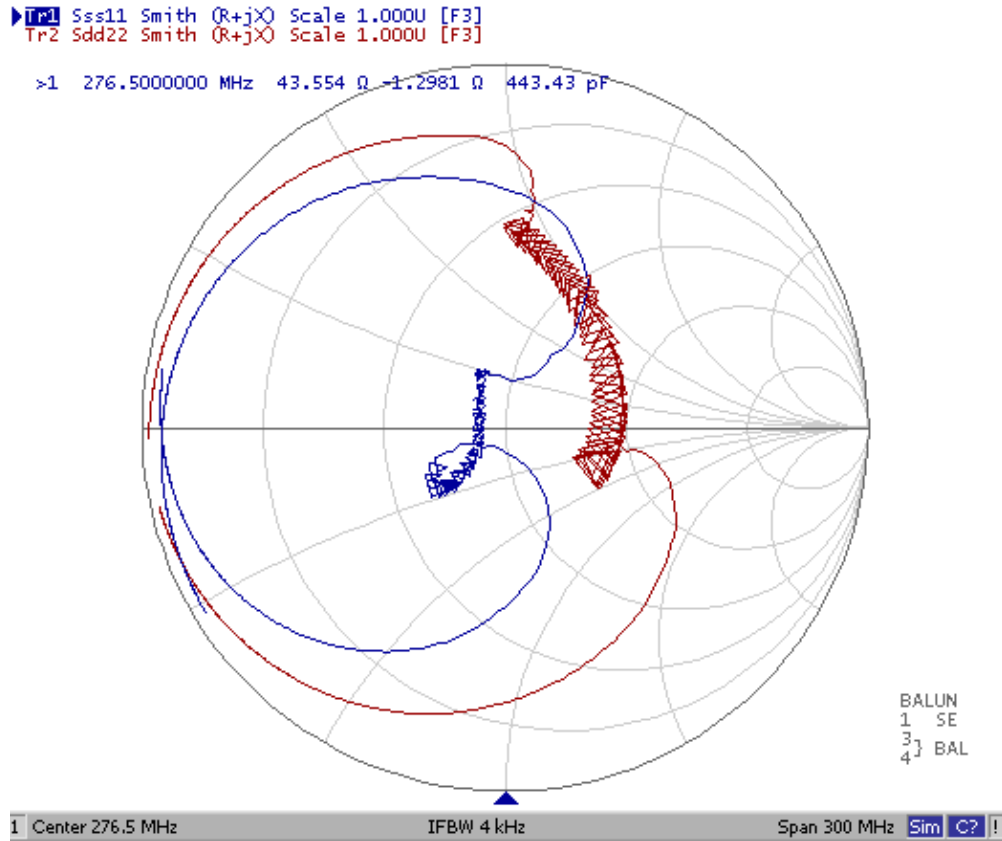

(4) Wide band Response:


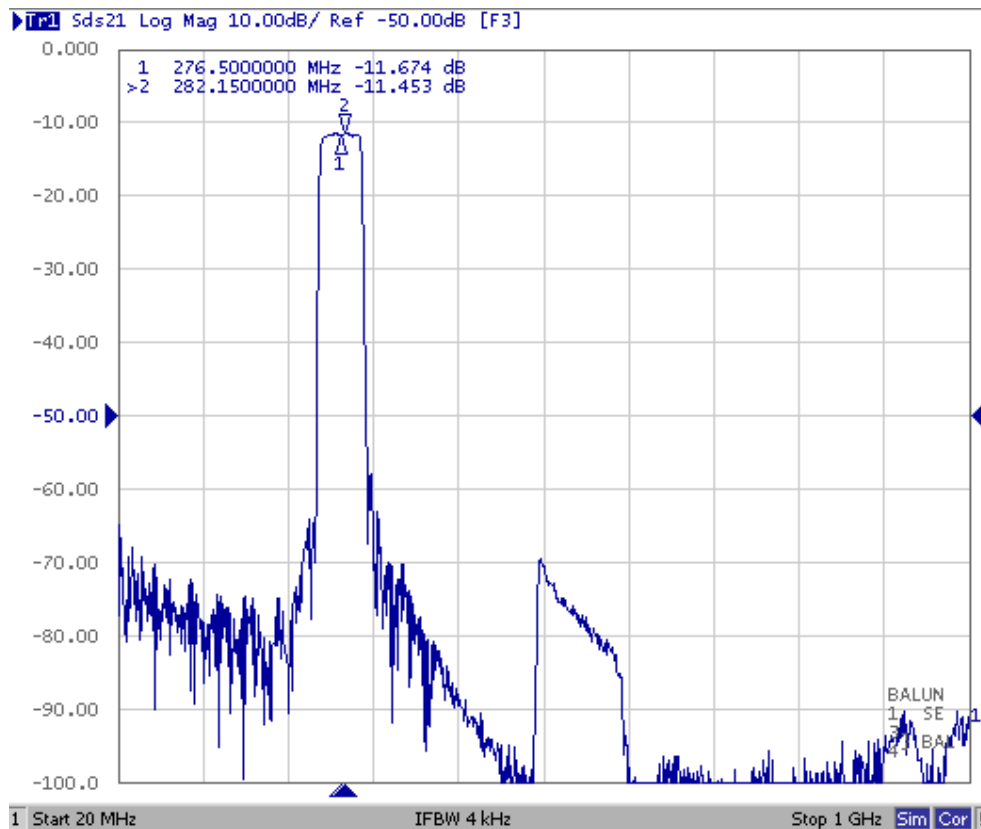



Fig4. Horizontal: 90MHz/Div Vertical: 10dB/Div

**D. Matching Circuit:**

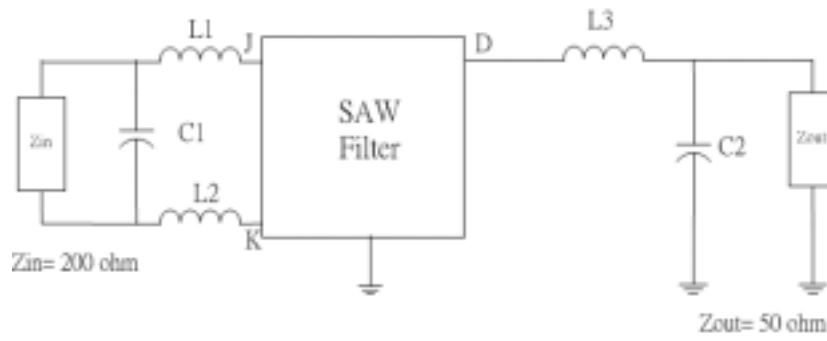

**L1=L2=18nH L3=18nH C1=8pF C2=27pF**

**E. Outline Drawing:**

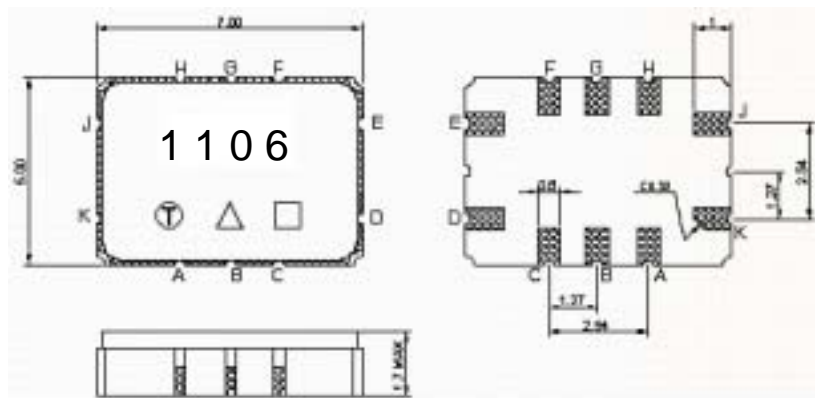

- Pin J –RF input
- Pin K –RF balance input or to be ground
- Pin D –RF output
- Pin E –RF output ground
- Pin A,B,C,F,G,H - Ground
- : Week Code
- Unit : mm
- : Product / Year Code


**Product Code Table**

Year	2009 2013	2010 2014	2011 2015	2012 2016
Product Code	B	b	<u>B</u>	<u>b</u>

**Week Code Table**

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z


**F. PCB Footprint:**

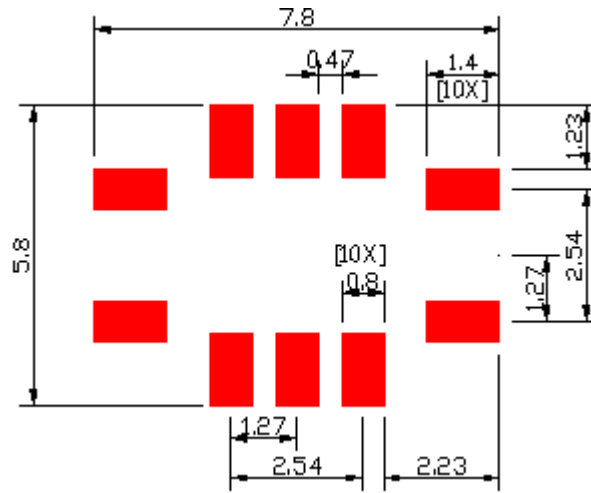


**G. PACKING:**

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

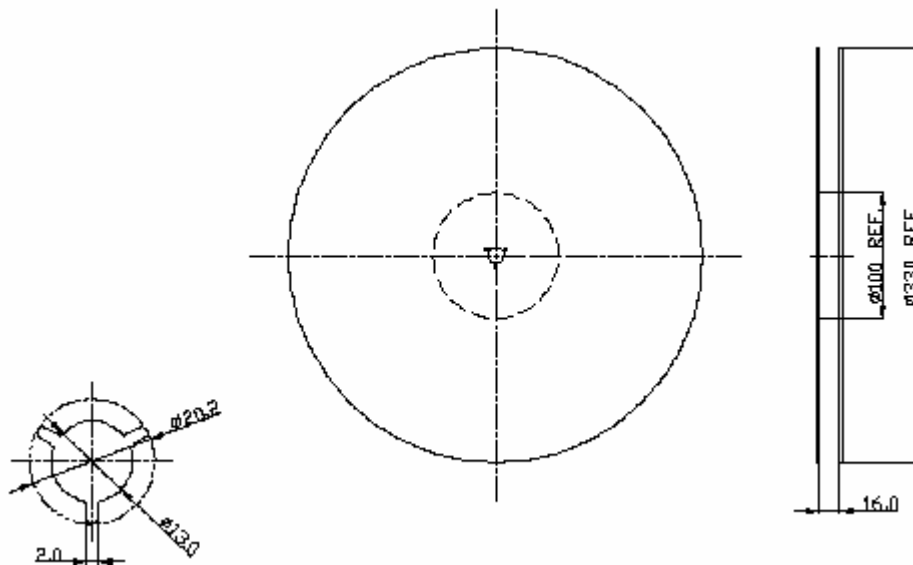

## 2. TAPE DIMENSION

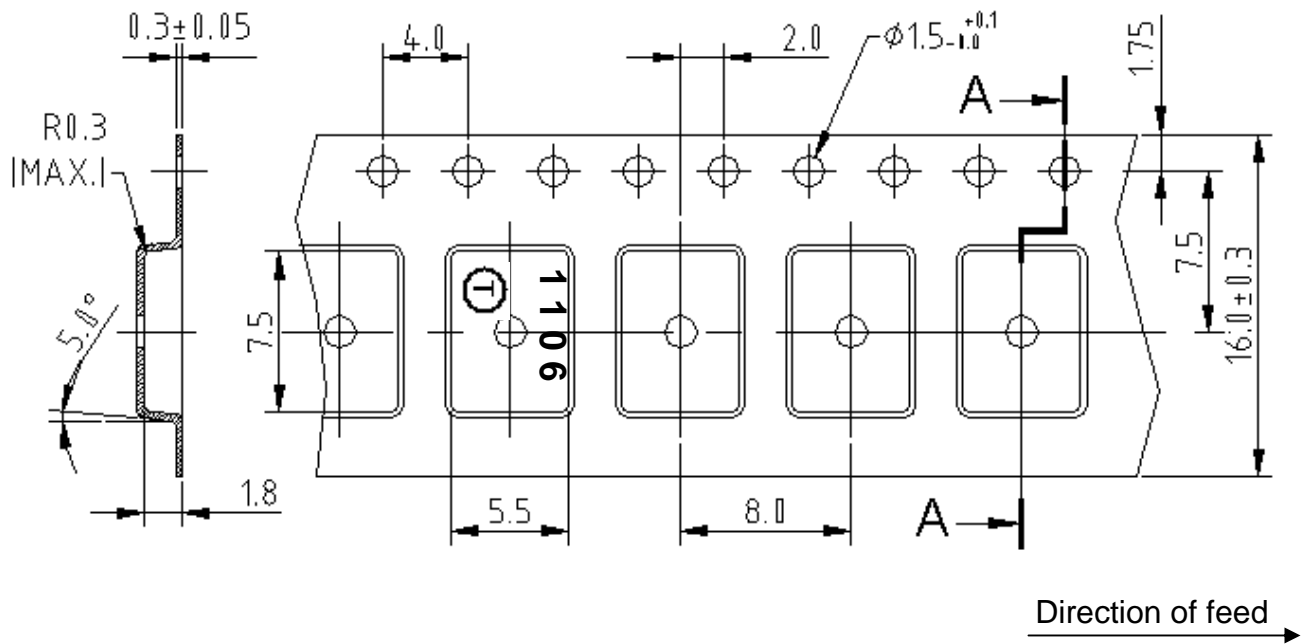

## H. RECOMMENDED REFLOW PROFILE\_:

