



Inductors

Military, MIL-PRF-15305 Qualified, Type LT
and Commercial, Molded, Shielded



FEATURES

- Wide inductance range in small package.
- Flame retardant coating.
- Electromagnetic shield-finest shield available.
- Epoxy molded construction provides superior moisture protection.
- Precision performance, excellent reliability, sturdy construction.

ELECTRICAL SPECIFICATIONS

Inductance Tolerance: ± 10% standard.
± 5% available.

Insulation Resistance: 1000 Megohm minimum per MIL-STD-202, Method 302, Test Condition B.

Dielectric Withstanding Voltage: 1000 VAC per MIL-STD-202, Method 301 (sea level).

Percent Coupling: 3% maximum per MIL-PRF-15305.

Operating Temperature Range: - 55°C to + 105°C.

MECHANICAL SPECIFICATIONS

Terminal Strength: 5 pounds pull per MIL-STD-202, Method 211, Test Condition A.

Weight: IMS-5 = 0.85 grams maximum.

MATERIAL SPECIFICATIONS


Encapsulant: Epoxy.

Standard Terminal: #22 AWG tinned copper.

INDUCTANCE RANGE AND MILITARY STANDARD						
INDUCTANCE RANGE		CLASSIFICATION		MATERIAL		MILITARY STANDARD
FROM	TO	GRADE	CLASS	CORE	SHIELD	
.10µH	.82µH	1	A	Phenolic	Powd. Iron	MS75087
1.0µH	12.0µH	1	A	Powd. Iron	Powd. Iron	MS75088
15.0µH	100,000µH	1	A	Ferrite	Ferrite	MS75089*

*Not QPL'd.

ENVIRONMENTAL PERFORMANCE		
TEST	CONDITIONS	SPECIFICATIONS
Barometric Pressure	Test Condition C	MIL-STD-202, Method 105
Thermal Shock	Test Condition A-1	MIL-STD-202, Method 107
Flammability	—	MIL-STD-202, Method 111
Overload	—	MIL-PRF-15305
Low Temperature Storage	—	MIL-PRF-15305
Resistance to Soldering Heat	Test Condition A	MIL-STD-202, Method 210
Resistance to Solvents	—	MIL-STD-202, Method 215

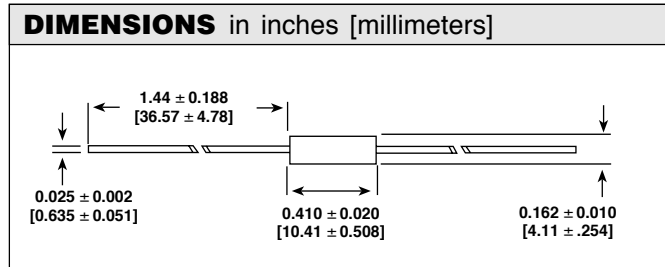

STANDARD ELECTRICAL SPECIFICATIONS									
IND. (µH)	TOL.	MILITARY STANDARD	MILITARY TYPE	Q MIN.	TEST FREQ. L & Q (MHz)	SELF-RESONANT * FREQ. MIN. (MHz)	DCR @ 25°C MAX. (Ohms)	RATED DC ** CURRENT (mA)	INCREMENTAL *** CURRENT (mA)
0.10	± 10%	MS75087	LT10K	50	25.0	250.0	0.025	1790	—
0.12	± 10%	-1	191	51	25.0	250.0	0.034	1530	—
0.15	± 10%	-2	192	51	25.0	250.0	0.037	1470	—
0.18	± 10%	-3	193	50	25.0	250.0	0.047	1300	—
0.22	± 10%	-4	194	49	25.0	250.0	0.067	1100	—
0.27	± 10%	-5	195	47	25.0	250.0	0.11	855	—
0.33	± 10%	-6	196	46	25.0	250.0	0.13	780	—
0.39	± 10%	-7	197	44	25.0	250.0	0.18	670	—
0.47	± 10%	-8	198	44	25.0	235.0	0.25	565	—
0.56	± 10%	-9	199	43	25.0	210.0	0.33	490	—
0.68	± 10%	-10	200	42	25.0	190.0	0.45	420	—
0.82	± 10%	-11	201	40	25.0	180.0	0.59	370	—
1.0	± 10%	-12	202	44	25.0	140.0	0.07	1070	—
1.2	± 10%	MS75088	LT10K	44	7.9	130.0	0.10	895	—

*Measured with full length lead. **Rated DC Current: Based on maximum temperature rise not to exceed 15°C at + 90°C ambient.
***Incremental Current: The minimum typical current at which the inductance will be decreased by 5% from its initial zero DC value.

NOTE: Listing of Military Standard does not imply qualification. Contact factory for latest government QPL information.



STANDARD ELECTRICAL SPECIFICATIONS

IND. (μH)	TOL.	MILITARY STANDARD	MILITARY TYPE	Q MIN.	TEST FREQ. L & Q (MHz)	SELF-RESONANT * FREQ. MIN. (MHz)	DCR @ 25°C MAX. (Ohms)	RATED DC ** CURRENT (mA)	INCREMENTAL *** CURRENT (mA)
1.5	± 10%	-3	205	44	7.9	115.0	0.12	815	—
1.8	± 10%	-4	206	44	7.9	105.0	0.14	775	—
2.2	± 10%	-5	207	44	7.9	100.0	0.19	650	—
2.7	± 10%	-6	208	44	7.9	92.0	0.28	535	—
3.3	± 10%	-7	209	44	7.9	85.0	0.35	480	—
3.9	± 10%	-8	210	44	7.9	75.0	0.40	450	—
4.7	± 10%	-9	211	44	7.9	70.0	0.55	380	—
5.6	± 10%	-10	212	44	7.9	65.0	0.72	335	—
6.8	± 10%	-11	213	50	7.9	55.0	1.02	280	—
8.2	± 10%	-12	214	50	7.9	50.0	1.32	250	—
10.0	± 10%	-13	215	50	7.9	46.0	1.62	220	—
12.0	± 10%	-14	216	55	2.5	44.0	2.0	200	—
		MS75089 (Not QPL'd)	LT10K						
15.0	± 10%	-1	217	45	2.5	49.0	0.80	315	250.0
18.0	± 10%	-2	218	45	2.5	45.0	0.89	300	235.0
22.0	± 10%	-3	219	45	2.5	41.0	0.96	290	220.0
27.0	± 10%	-4	220	45	2.5	38.0	1.19	260	200.0
33.0	± 10%	-5	221	45	2.5	34.0	1.37	240	190.0
39.0	± 10%	-6	222	50	2.5	29.0	1.93	205	180.0
47.0	± 10%	-7	223	50	2.5	27.0	2.11	195	175.0
56.0	± 10%	-8	224	50	2.5	25.0	2.23	190	160.0
68.0	± 10%	-9	225	50	2.5	21.0	2.70	170	150.0
82.0	± 10%	-10	226	50	2.5	10.5	2.44	180	140.0
100.0	± 10%	-11	227	50	2.5	10.0	3.12	160	120.0
120.0	± 10%	-12	228	55	0.79	9.7	3.6	150	95.0
150.0	± 10%	-13	229	55	0.79	8.5	4.1	140	90.0
180.0	± 10%	-14	230	55	0.79	8.0	4.4	135	85.0
220.0	± 10%	-15	231	55	0.79	7.5	5.0	125	80.0
270.0	± 10%	-16	232	55	0.79	7.0	5.8	115	70.0
330.0	± 10%	-17	233	55	0.79	6.5	6.4	110	65.0
390.0	± 10%	-18	234	60	0.79	6.2	7.4	105	60.0
470.0	± 10%	-19	235	60	0.79	5.7	9.5	92	58.0
560.0	± 10%	-20	236	60	0.79	4.7	10.5	90	55.0
680.0	± 10%	-21	237	60	0.79	4.5	11.8	80	50.0
820.0	± 10%	-22	238	60	0.79	4.2	13.0	80	45.0
		MS75089 (Not QPL'd)	LT10K						
1000.0	± 10%	-23	239	60	0.79	3.8	17.5	70	40.0
1200.0	± 10%	-24	240	45	0.25	1.5	22.1	60	35.0
1500.0	± 10%	-25	241	45	0.25	1.2	26.5	55	33.0
1800.0	± 10%	-26	242	45	0.25	1.0	29.9	50	30.0
2200.0	± 10%	-27	243	45	0.25	0.97	33.8	50	27.0
2700.0	± 10%	-28	244	45	0.25	0.92	47.3	40	25.0
3300.0	± 10%	-29	245	45	0.25	0.84	53.0	40	22.0
3900.0	± 10%	-30	246	45	0.25	0.80	73.8	35	20.0
4700.0	± 10%	-31	247	45	0.25	0.74	81.6	31	19.0
5600.0	± 10%	-32	248	44	0.25	0.73	98.9	28	17.0
6800.0	± 10%	-33	249	40	0.25	0.66	111.0	27	16.0
8200.0	± 10%	-34	250	40	0.25	0.54	119.0	26	15.0
10000.0	± 10%	-35	251	40	0.25	0.47	137.0	24	14.0
12000.0	± 10%	-36	252	30	0.079	0.33	143.0	23	13.0
15000.0	± 10%	-37	253	30	0.079	0.29	157.0	22	12.0
18000.0	± 10%	-38	254	30	0.079	0.28	175.0	21	10.0
22000.0	± 10%	-39	255	27	0.079	0.25	274.0	17	9.0
27000.0	± 10%	-40	256	27	0.079	0.21	308.0	16	8.0
33000.0	± 10%	-41	257	27	0.079	0.19	343.0	15	7.5
39000.0	± 10%	-42	258	27	0.079	0.17	376.0	15	6.0
47000.0	± 10%	-43	259	23	0.079	0.16	473.0	13	5.5
56000.0	± 10%	-44	260	23	0.079	0.14	512.0	13	5.0
68000.0	± 10%	-45	261	23	0.079	0.13	580.0	12	4.0
82000.0	± 10%	-46	262	21	0.079	0.12	618.0	11	3.5
100000.0	± 10%	-47	263	18	0.079	0.11	678.0	11	3.0

*Measured with full length lead. **Rated DC Current: Based on maximum temperature rise not to exceed 15°C at + 90°C ambient. ***Incremental Current: The minimum typical current at which the inductance will be decreased by 5% from its initial zero DC value.

NOTE: Listing of Military Standard does not imply qualification. Contact factory for latest government QPL information.

ORDERING INFORMATION

IMS-5	10μH	± 10%
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE

ORDERING INFORMATION - MILITARY PART NUMBER

MS75088	-13	OR	LT	10	K	215
MILITARY STANDARD	INDUCTANCE VALUE		TYPE	GRADE AND CLASS	FAMILY	ID NUMBER



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.