

Axial Lead Transient Voltage Suppressors (TVS)

30KP Series 28 To 288 V 30000W


Description

The 30KP series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.


Features

- u Glass passivated chip junction in P600 Package
- u Low leakage
- u Uni and Bidirectional unit
- u Excellent clamping capability
- u 30000W Peak power capability at 10 × 1000µs waveform Repetition rate (duty cycle):0.01%
- u Fast response time: typically less than 1.0ps from 0 Volts to V_{BR} min
- u Typical I_R less than 2µA above 73V.
- u High Temperature soldering: 260°C/40 seconds at terminals
- u Typical maximum temperature coefficient $\Delta V_{BR} = 0.1\% \times V_{BR}@25^\circ\text{C} \times \Delta T$
- u Plastic package has Underwriters Laboratory Flammability 94V-0
- u Matte tin lead-free Plated
- u Halogen free and RoHS compliant
- u Typical failure mode is short from over-specified voltage or current
- u Whisker test is conducted based on JEDEC JESD201A per its table 4a and 4c
- u IEC-61000-4-2 ESD 15kV(Air), 8kV (Contact)
- u ESD protection of data lines in accordance with IEC 61000-4-2 (IEC801-2)
- u EFT protection of data lines in accordance with IEC 61000-4-4 (IEC801-4)


Uni-directional

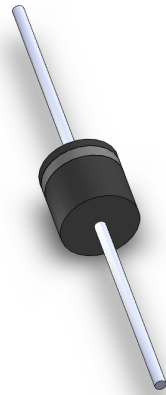

Bi-directional

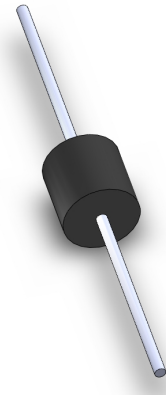

Functional Diagram

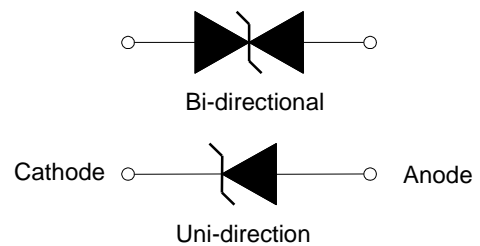

Applications

TVS devices are ideal for the protection of I/O interfaces, V_{CC} bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation with a 10/1000µs waveform (Fig.1)(Note 1), (Note 2)	P_{PPM}	20000	Watts
Peak Pulse Current with a 10/1000µs waveform.(Note1, Fig.3)	I_{PP}	See Next Table	Amps
Power Dissipation on Infinite Heat Sink at $T_L=75^\circ\text{C}$	$P_{M(AV)}$	8.0	Watt
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)	I_{FSM}	500	Amps
Operating junction and Storage Temperature Range.	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2.
2. Mounted on 5.0mm x 5.0mm (0.03mm thick) Copper Pads to each terminal.
3. 8.3ms single half sine-wave, or equivalent square wave, Duty cycle = 4 pulses per minutes maximum.
4. $V_F < 3.5\text{V}$ for $V_{BR} < 200\text{V}$ and $V_F < 6.5\text{V}$ for $V_{BR} > 201\text{V}$.

Axial Lead Transient Voltage Suppressors (TVS)

30KP Series 28 To 288 V 30000W

Part Number		Reverse Stand-Off Voltage V_{RWM} (V)	Breakdown Voltage V_{BR} (V) @ I_T	Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{PP} (V)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage I_R @ V_{RWM} (μ A)
Uni	Bi		MIN				
30KP28A	30KP28CA	28	31.28	50	50.0	606.0	5000
30KP30A	30KP30CA	30	33.51	50	55.2	548.9	5000
30KP33A	30KP33CA	33	36.90	50	58.5	517.9	5000
30KP36A	30KP36CA	36	40.20	50	61.8	490.3	5000
30KP39A	30KP39CA	39	43.60	20	67.2	450.9	2000
30KP42A	30KP42CA	42	46.90	10	72.0	420.8	1000
30KP43A	30KP43CA	43	48.00	10	73.0	415.1	1000
30KP45A	30KP45CA	45	50.30	5	77.4	391.5	250
30KP48A	30KP48CA	48	53.60	5	81.6	371.3	150
30KP51A	30KP51CA	51	57.00	5	86.4	350.7	50
30KP54A	30KP54CA	54	60.30	5	91.4	331.5	20
30KP58A	30KP58CA	58	64.80	5	92.4	327.9	20
30KP60A	30KP60CA	60	67.00	5	102.0	297.1	15
30KP64A	30KP64CA	64	71.50	5	104.0	291.3	10
30KP66A	30KP66CA	66	73.70	5	107.0	283.2	2
30KP70A	30KP70CA	70	78.20	5	109.0	278.0	2
30KP71A	30KP71CA	71	79.30	5	111.5	271.7	2
30KP72A	30KP72CA	72	80.40	5	114.0	265.8	2
30KP75A	30KP75CA	75	83.80	5	119.4	253.8	2
30KP78A	30KP78CA	78	87.10	5	129.0	234.9	2
30KP84A	30KP84CA	84	93.80	5	139.2	217.7	2
30KP90A	30KP90CA	90	100.50	5	146.4	207.0	2
30KP96A	30KP96CA	96	107.20	5	156.0	194.2	2
30KP102A	30KP102CA	102	113.90	5	165.6	183.0	2
30KP108A	30KP108CA	108	120.60	5	175.2	172.9	2
30KP120A	30KP120CA	120	134.00	5	194.4	155.9	2
30KP132A	30KP132CA	132	147.40	5	213.0	142.3	2
30KP144A	30KP144CA	144	160.80	5	223.2	135.8	2
30KP150A	30KP150CA	150	167.60	5	233.4	129.8	2
30KP156A	30KP156CA	156	174.30	5	245.0	123.7	2
30KP160A	30KP160CA	160	178.70	5	252.6	120.0	2
30KP168A	30KP168CA	168	187.70	5	272.4	111.2	2
30KP170A	30KP170CA	170	189.90	5	275.0	110.2	2
30KP180A	30KP180CA	180	201.10	5	290.4	104.3	2
30KP198A	30KP198CA	198	221.20	5	319.8	94.7	2
30KP216A	30KP216CA	216	241.30	5	348.6	86.9	2
30KP240A	30KP240CA	240	268.10	5	387.0	78.3	2
30KP258A	30KP258CA	258	188.20	5	416.4	72.8	2
30KP260A	30KP260CA	260	290.40	5	416.0	72.8	2
30KP270A	30KP270CA	270	301.60	5	436.2	69.5	2
30KP280A	30KP280CA	280	312.80	5	464.0	65.3	2
30KP288A	30KP288CA	288	321.70	5	469.9	64.5	2

Note:

- For Bi-Directional devices having V_R of 60 volts and under, the I_R limit is double

Axial Lead Transient Voltage Suppressors (TVS)

30KP Series 28 To 288 V 30000W

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1 - Peak Pulse Power Rating Curve

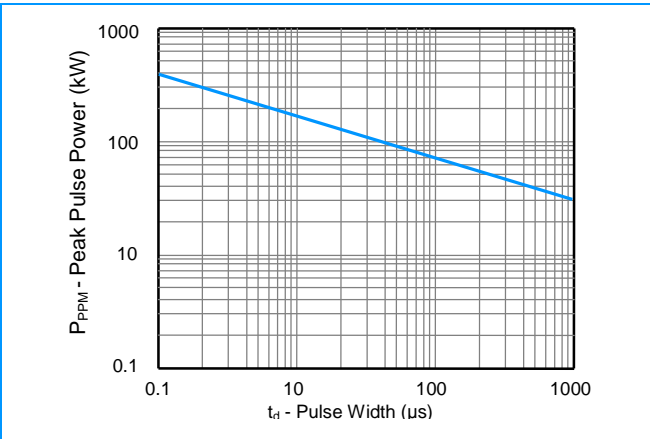


Figure 2 - Pulse Derating Curve

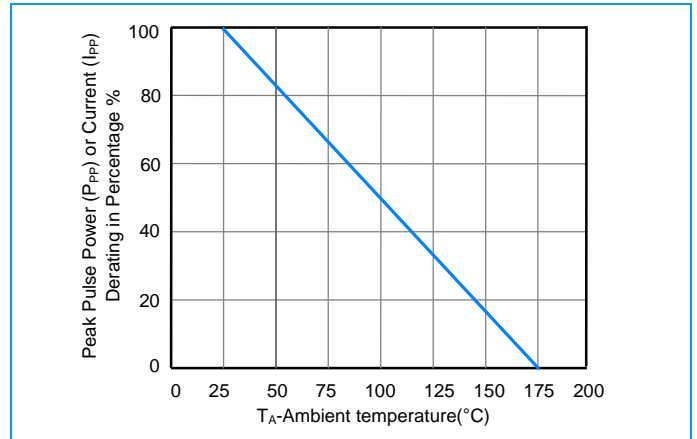


Figure 3 - Pulse Waveform

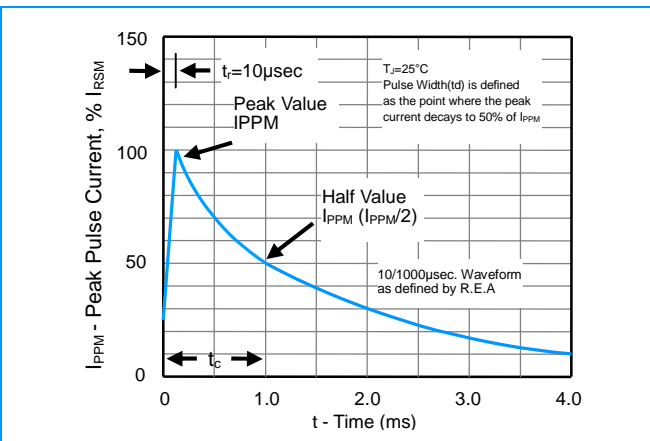


Figure 4 - Typical Junction Capacitance

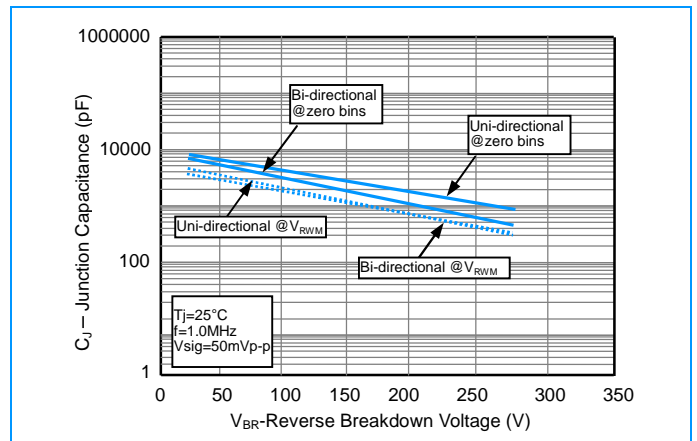


Figure 5 - Steady State Power Derating Curve


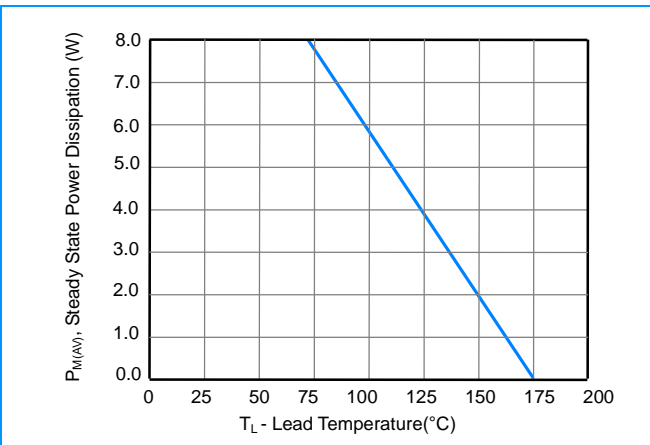




Figure 6 - Maximum Non-Repetitive Surge Current

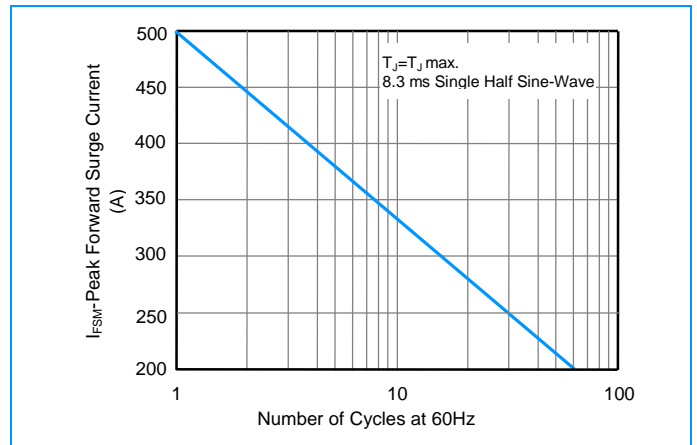

Axial Lead Transient Voltage Suppressors (TVS)

30KP Series 28 To 288 V 30000W

I-V Curve Characteristics

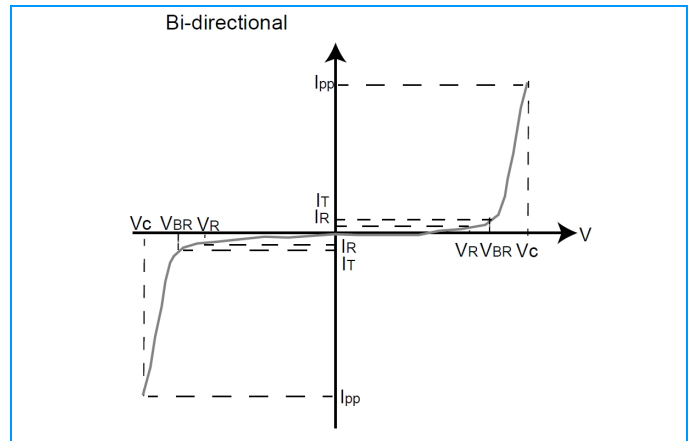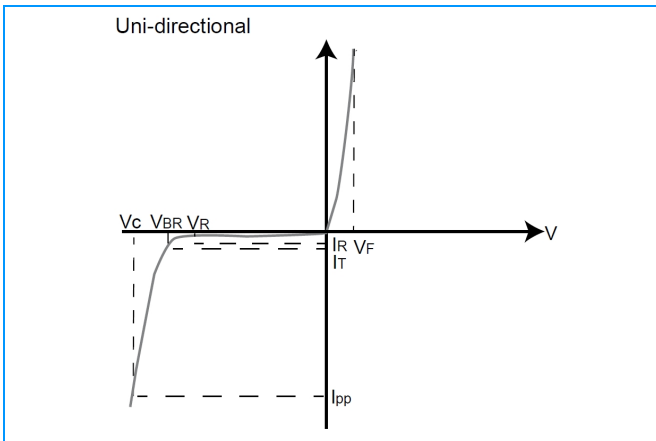


Physical Specifications

Weight	0.07 ounce, 2.1gram
Case	JEDEC R-6/P600 Molded Plastic over glass passivated junction
Polarity	Color band denotes cathode except Bipolar
Terminal	Matte Tin-plated leads, Solderable per JESD22-B102D

Environmental Specifications

Temperature Cycle	JESD22-A104
Pressure Cooker	JESD22-A102
High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Thermal Shock	JESD22-A106

Soldering Parameters

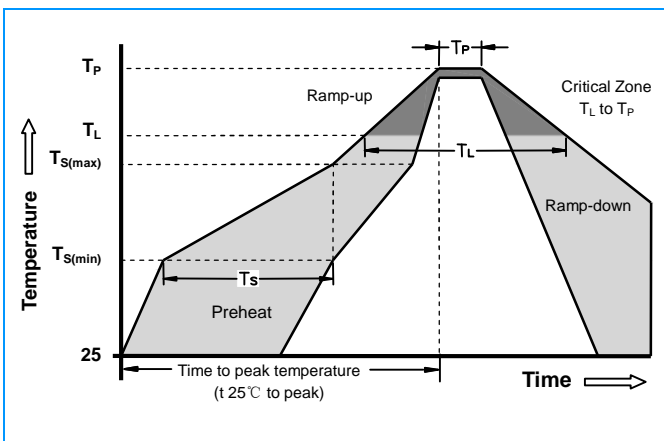


Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	150°C
	-Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 -180 Seconds
Average ramp up rate (Liquidus Temp T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Time (min to max) (t_s)	60 -150 Seconds
Peak Temperature (T_P)		260 +0/-5°C
Time within 5°C of actual peak Temperature (t_p)		20 -40 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max
Do not exceed		280°C

Axial Lead Transient Voltage Suppressors (TVS)


30KP Series 28 To 288 V 30000W

Dimensions

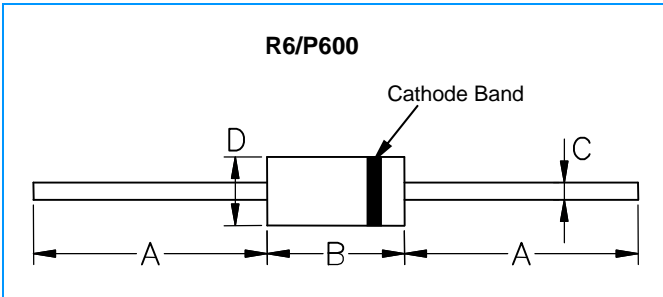

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	1.000	-	25.40	-
B	0.340	0.360	8.64	9.14
C	0.048	0.052	1.22	1.32
D	0.340	0.360	8.64	9.14

Part Numbering

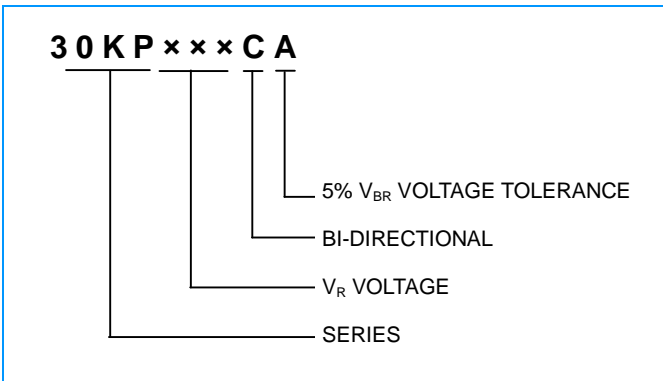

Packaging

Part Number	Component Package	Quantity	Packaging Option
30KPXXXXX	R6/P600	200	Box

Packaging Dimensions Unit: Inches (Millimeters)

