



### Dual IGBT NX-Series Module 600 Amperes/1200 Volts

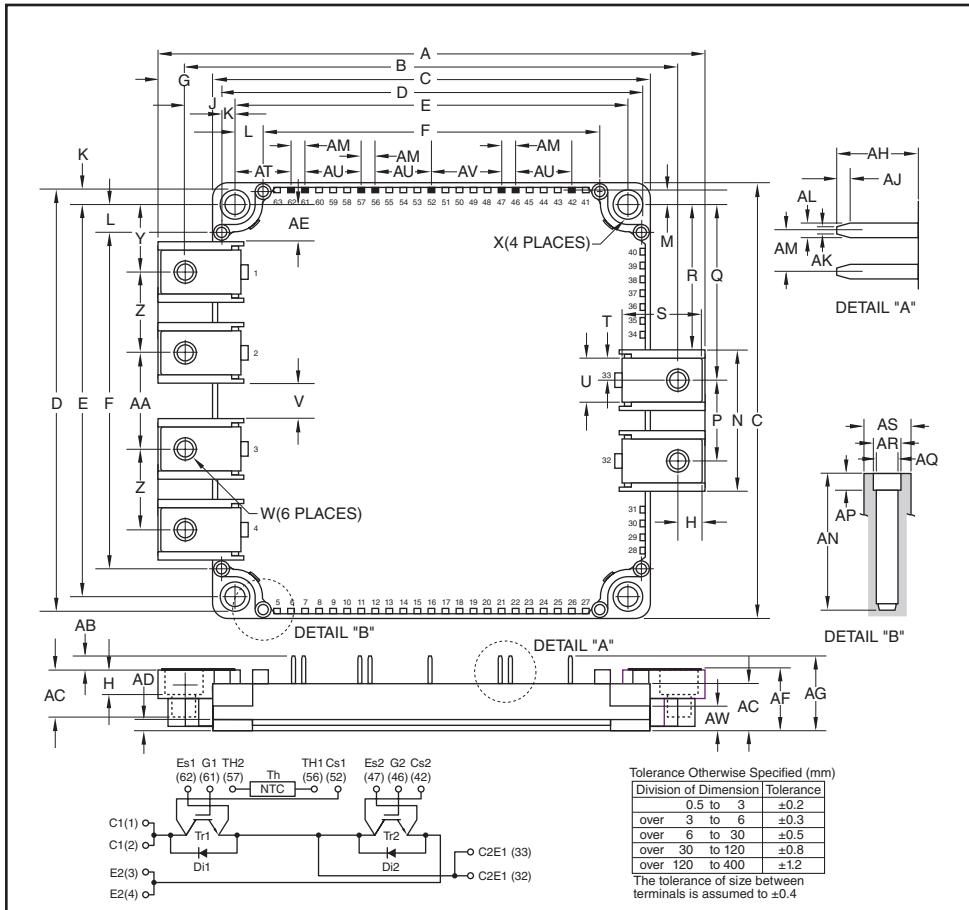

**Outline Drawing and Circuit Diagram**

Dimensions	Inches	Millimeters
A	5.98	152.0
B	5.39	137.0
C	4.79	121.7
D	4.61	117.2
E	4.33±0.02	110.0±0.5
F	3.72	94.5
G	0.6	15.14
H	0.26	6.5
J	0.53	13.5
K	0.14	3.6
L	0.3	7.75
M	0.016	4.05
N	1.53	39.0
P	0.86	22.0
Q	1.95	49.72
R	1.62	41.22
S	0.83	21.14
T	0.23	6.0
U	0.47	12.0
V	0.41	10.53
W	M6 Metric	M6
X	0.22 Dia.	5.5 Dia.
Y	0.75	19.24

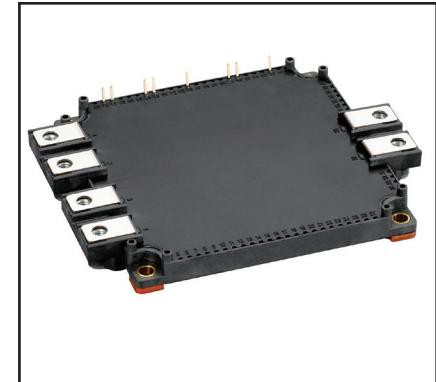

#### Description:

Powerex IGBT Modules are designed for use in switching applications. Each module consists of two IGBT Transistors in a half-bridge configuration with each transistor having a reverse-connected super-fast recovery free-wheel diode. All components and interconnects are isolated from the heat sinking baseplate, offering simplified system assembly and thermal management.

#### Features:

- Low Drive Power
- Low  $V_{CE(sat)}$
- Discrete Super-Fast Recovery Free-Wheel Diode
- Isolated Baseplate for Easy Heat Sinking

#### Applications:

- AC Motor Control
- Motion/Servo Control
- Photovoltaic/Fuel Cell

#### Ordering Information:

Example: Select the complete module number you desire from the table below -i.e.

CM600DXL-24S is a 1200V ( $V_{CES}$ ), 600 Ampere Dual IGBT Power Module.

Dimensions	Inches	Millimeters
Z	0.86	22.0
AA	1.08	27.53
AB	0.14	3.5
AC	0.51	13.0
AD	0.19	3.0
AE	0.42	10.74
AF	0.67+0.04/-0.02	17.0+1.0/-0.5
AG	0.81	20.5
AH	0.29	7.4
AJ	0.05	1.2
AK	0.02	0.65
AL	0.04	1.15
AM	0.15	3.81
AN	0.5	12.5
AP	0.12	3.0
AQ	0.088 Dia.	2.25 Dia.
AR	0.102 Dia.	2.6 Dia.
AS	0.16 Dia.	4.3 Dia.
AT	0.67	16.9
AU	0.6	15.24
AV	0.75	19.05
AW	0.27	7.0

**CM600DXL-24S**  
**Dual IGBT NX-Series Module**  
 600 Amperes/1200 Volts

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

### Inverter Part IGBT/FWDI

Characteristics	Symbol	Rating	Units
Collector-Emitter Voltage ( $V_{GE} = 0\text{V}$ )	$V_{CES}$	1200	Volts
Gate-Emitter Voltage ( $V_{CE} = 0\text{V}$ )	$V_{GES}$	$\pm 20$	Volts
Collector Current (DC, $T_C = 119^\circ\text{C}$ ) <sup>2,*4</sup>	$I_C$	600	Amperes
Collector Current (Pulse) <sup>*3</sup>	$I_{CRM}$	1200	Amperes
Total Power Dissipation ( $T_C = 25^\circ\text{C}$ ) <sup>2,*4</sup>	$P_{tot}$	4545	Watts
Emitter Current ( $T_C = 25^\circ\text{C}$ ) <sup>*2</sup>	$I_E^{*1}$	600	Amperes
Emitter Current (Pulse) <sup>*3</sup>	$I_{ERM}^{*1}$	1200	Amperes

### Module

Characteristics	Symbol	Rating	Units
Isolation Voltage (Terminals to Baseplate, RMS, $f = 60\text{Hz}$ , AC 1 minute)	$V_{ISO}$	2500	Volts
Maximum Junction Temperature, Instantaneous Event (Overload)	$T_{j(max)}$	175	$^\circ\text{C}$
Maximum Case Temperature <sup>*4</sup>	$T_{C(max)}$	125	$^\circ\text{C}$
Operating Junction Temperature, Continuous Operation (Under Switching)	$T_{j(op)}$	-40 to +150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 to +125	$^\circ\text{C}$

<sup>\*1</sup> Represent ratings and characteristics of the anti-parallel, emitter-to-collector free wheeling diode (FWDI).


<sup>\*2</sup> Case temperature ( $T_C$ ) and heatsink temperature ( $T_S$ ) is measured on the surface (mounting side) of the baseplate and the heatsink side just under the chips.

Refer to the figure to the right for chip location.

The heatsink thermal resistance should be measured just under the chips.

<sup>\*3</sup> Pulse width and repetition rate should be such that device junction temperature ( $T_j$ ) does not exceed  $T_{j(max)}$  rating.

<sup>\*4</sup> Junction temperature ( $T_j$ ) should not increase beyond maximum junction temperature ( $T_{j(max)}$ ) rating.

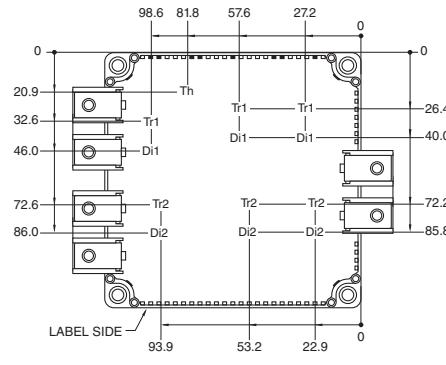

Tr1 / Tr2: IGBT, Di1 / Di2: FWDI, Th: NTC Thermistor  
 Each mark points to the center position of each chip.

**CM600DXL-24S**  
**Dual IGBT NX-Series Module**  
600 Amperes/1200 Volts

**Electrical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

**Inverter Part IGBT/FWDi**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}$ , $V_{GE} = 0\text{V}$	—	—	1.0	mA
Gate-Emitter Leakage Current	$I_{GES}$	$V_{GE} = V_{GES}$ , $V_{CE} = 0\text{V}$	—	—	0.5	$\mu\text{A}$
Gate-Emitter Threshold Voltage	$V_{GE(\text{th})}$	$I_C = 60\text{mA}$ , $V_{CE} = 10\text{V}$	5.4	6.0	6.6	Volts
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 600\text{A}$ , $V_{GE} = 15\text{V}$ , $T_j = 25^\circ\text{C}^5$	—	1.85	2.30	Volts
	(Terminal)	$I_C = 600\text{A}$ , $V_{GE} = 15\text{V}$ , $T_j = 125^\circ\text{C}^5$	—	2.05	—	Volts
		$I_C = 600\text{A}$ , $V_{GE} = 15\text{V}$ , $T_j = 150^\circ\text{C}^5$	—	2.10	—	Volts
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 600\text{A}$ , $V_{GE} = 15\text{V}$ , $T_j = 25^\circ\text{C}^5$	—	1.70	2.15	Volts
	(Chip)	$I_C = 600\text{A}$ , $V_{GE} = 15\text{V}$ , $T_j = 125^\circ\text{C}^5$	—	1.90	—	Volts
		$I_C = 600\text{A}$ , $V_{GE} = 15\text{V}$ , $T_j = 150^\circ\text{C}^5$	—	1.95	—	Volts
Input Capacitance	$C_{ies}$		—	—	60	nF
Output Capacitance	$C_{oes}$	$V_{CE} = 10\text{V}$ , $V_{GE} = 0\text{V}$	—	—	12	nF
Reverse Transfer Capacitance	$C_{res}$		—	—	1.0	nF
Gate Charge	$Q_G$	$V_{CC} = 600\text{V}$ , $I_C = 600\text{A}$ , $V_{GE} = 15\text{V}$	—	1400	—	nC
Turn-on Delay Time	$t_{d(\text{on})}$		—	—	800	ns
Rise Time	$t_r$	$V_{CC} = 600\text{V}$ , $I_C = 600\text{A}$ , $V_{GE} = \pm 15\text{V}$	—	—	200	ns
Turn-off Delay Time	$t_{d(\text{off})}$	$R_G = 0\Omega$ , Inductive Load	—	—	600	ns
Fall Time	$t_f$		—	—	300	ns
Emitter-Collector Voltage	$V_{EC}^{*1}$	$I_E = 600\text{A}$ , $V_{GE} = 0\text{V}$ , $T_j = 25^\circ\text{C}^5$	—	1.85	2.30	Volts
	(Terminal)	$I_E = 600\text{A}$ , $V_{GE} = 0\text{V}$ , $T_j = 125^\circ\text{C}^5$	—	1.85	—	Volts
		$I_E = 600\text{A}$ , $V_{GE} = 0\text{V}$ , $T_j = 150^\circ\text{C}^5$	—	1.85	—	Volts
Emitter-Collector Voltage	$V_{EC}^{*1}$	$I_E = 600\text{A}$ , $V_{GE} = 0\text{V}$ , $T_j = 25^\circ\text{C}^5$	—	1.70	2.15	Volts
	(Chip)	$I_E = 600\text{A}$ , $V_{GE} = 0\text{V}$ , $T_j = 125^\circ\text{C}^5$	—	1.70	—	Volts
		$I_E = 600\text{A}$ , $V_{GE} = 0\text{V}$ , $T_j = 150^\circ\text{C}^5$	—	1.70	—	Volts
Reverse Recovery Time	$t_{rr}^{*1}$	$V_{CC} = 600\text{V}$ , $I_E = 600\text{A}$ , $V_{GE} = \pm 15\text{V}$	—	—	300	ns
Reverse Recovery Charge	$Q_{rr}^{*1}$	$R_G = 0\Omega$ , Inductive Load	—	32	—	$\mu\text{C}$
Turn-on Switching Energy per Pulse	$E_{on}$	$V_{CC} = 600\text{V}$ , $I_C = I_E = 600\text{A}$ , $V_{GE} = \pm 15\text{V}$	—	20.3	—	mJ
Turn-off Switching Energy per Pulse	$E_{off}$	$R_G = 0\Omega$ , $T_j = 150^\circ\text{C}$	—	60.1	—	mJ
Reverse Recovery Energy per Pulse	$E_{rr}^{*1}$	Inductive Load	—	69.2	—	mJ
Internal Lead Resistance	$R_{CC' + EE'}$	Main Terminals-Chip, Per Switch, $T_C = 25^\circ\text{C}^{*2}$	—	—	0.8	$\text{m}\Omega$
Internal Gate Resistance	$r_g$	Per Switch	—	3.3	—	$\Omega$


\*1 Represent ratings and characteristics of the anti-parallel, emitter-to-collector free wheeling diode (FWDi).

\*2 Case temperature ( $T_C$ ) and heatsink temperature ( $T_s$ ) is measured on the surface (mounting side) of the baseplate and the heatsink side just under the chips.

Refer to the figure to the right for chip location.

The heatsink thermal resistance should be measured just under the chips.

\*5 Pulse width and repetition rate should be such as to cause negligible temperature rise.

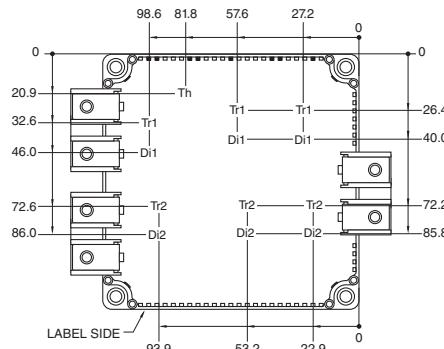

Tr1 / Tr2: IGBT, Di1 / Di2: FWDi, Th: NTC Thermistor  
Each mark points to the center position of each chip.

**CM600DXL-24S**  
**Dual IGBT NX-Series Module**  
600 Amperes/1200 Volts

### Electrical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified (continued)

#### NTC Thermistor Part

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Zero Power Resistance	$R_{25}$	$T_C = 25^\circ\text{C}^2$	4.85	5.00	5.15	kΩ
Deviation of Resistance	$\Delta R/R$	$T_C = 100^\circ\text{C}^2, R_{100} = 493\Omega$	-7.3	—	+7.8	%
B Constant	$B_{(25/50)}$	Approximate by Equation <sup>*6</sup>	—	3375	—	K
Power Dissipation	$P_{25}$	$T_C = 25^\circ\text{C}^4$	—	—	10	mW

#### Thermal Resistance Characteristics

Thermal Resistance, Junction to Case <sup>*2</sup>	$R_{th(j-c)Q}$	Per Inverter IGBT	—	—	33	K/kW
Thermal Resistance, Junction to Case <sup>*2</sup>	$R_{th(j-c)D}$	Per Inverter FWDI	—	—	63	K/kW
Contact Thermal Resistance, Case to Heatsink <sup>*2</sup>	$R_{th(c-f)}$	Thermal Grease Applied, Per 1 Module <sup>*7</sup>	—	7	—	K/kW

#### Mechanical Characteristics

Mounting Torque	$M_t$	Main Terminals, M6 Screw	31	35	40	in-lb
Mounting Torque	$M_s$	Mounting to Heatsink, M5 Screw	22	27	31	in-lb
Creepage Distance	$d_s$	Terminal to Terminal	13.2	—	—	mm
		Terminal to Baseplate	15.3	—	—	mm
Clearance	$d_a$	Terminal to Terminal	13.2	—	—	mm
		Terminal to Baseplate	14.8	—	—	mm
Weight	$m$		—	690	—	Grams
Flatness of Baseplate	$e_c$	On Centerline X, Y <sup>*8</sup>	±0	—	±100	μm

#### Recommended Operating Conditions, $T_a = 25^\circ\text{C}$

DC Supply Voltage	$V_{CC}$	Applied Across C1-E2 Terminals	—	600	850	Volts
Gate-Emitter Drive Voltage	$V_{GE(on)}$	Applied Across G1-Es1/G2-Es2 Terminals	13.5	15.0	16.5	Volts
External Gate Resistance	$R_G$	Per Switch	0	—	6.8	Ω

<sup>\*2</sup> Case temperature ( $T_C$ ) and heatsink temperature ( $T_s$ ) is measured on the surface (mounting side) of the baseplate and the heatsink side just under the chips. Refer to the figure to the right for chip location.

The heatsink thermal resistance should be measured just under the chips.



$${}^*6 \quad B_{(25/50)} = \ln \frac{R_{25}}{R_{50}} / (\frac{1}{T_{25}} - \frac{1}{T_{50}})$$

$R_{25}$ : Resistance at Absolute Temperature  $T_{25}$  [K];  $T_{25} = 25 [^\circ\text{C}] + 273.15 = 298.15$  [K]

$R_{50}$ : Resistance at Absolute Temperature  $T_{50}$  [K];  $T_{50} = 50 [^\circ\text{C}] + 273.15 = 323.15$  [K]


<sup>\*7</sup> Typical value is measured by using thermally conductive grease of  $\lambda = 0.9$  [W/(m · K)].

<sup>\*8</sup> Baseplate (mounting side) flatness measurement points (X, Y) are shown in the figure below.

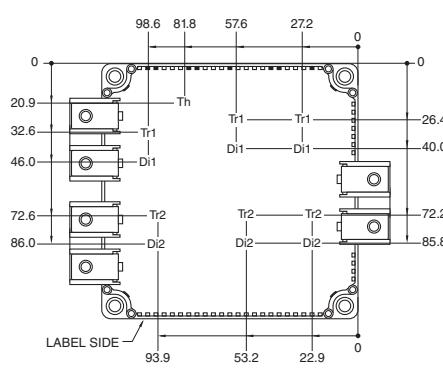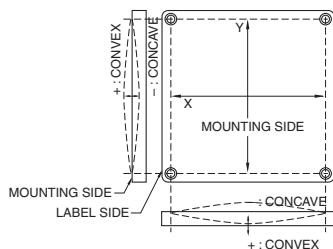


**CM600DXL-24S**  
**Dual IGBT NX-Series Module**  
600 Amperes/1200 Volts


**OUTPUT CHARACTERISTICS  
(TYPICAL)**

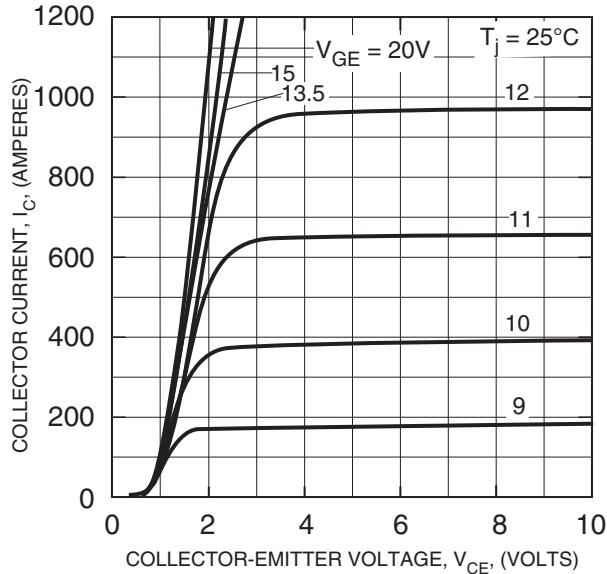


**COLLECTOR-EMITTER  
SATURATION VOLTAGE CHARACTERISTICS  
(TYPICAL)**

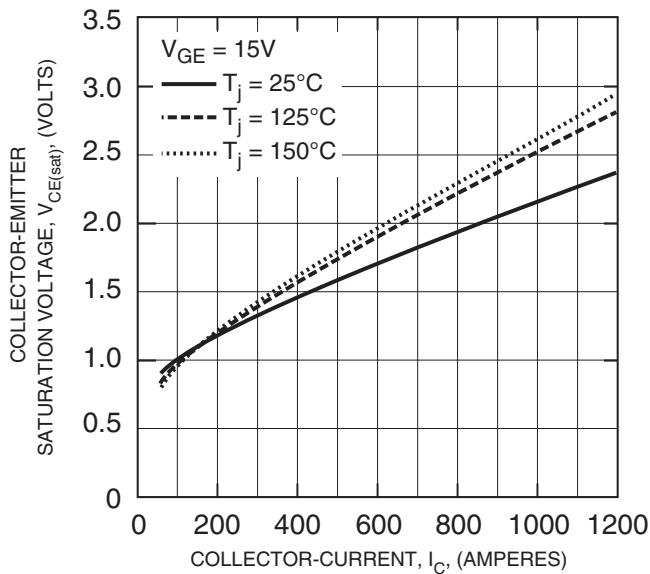





**COLLECTOR-EMITTER  
SATURATION VOLTAGE CHARACTERISTICS  
(TYPICAL)**

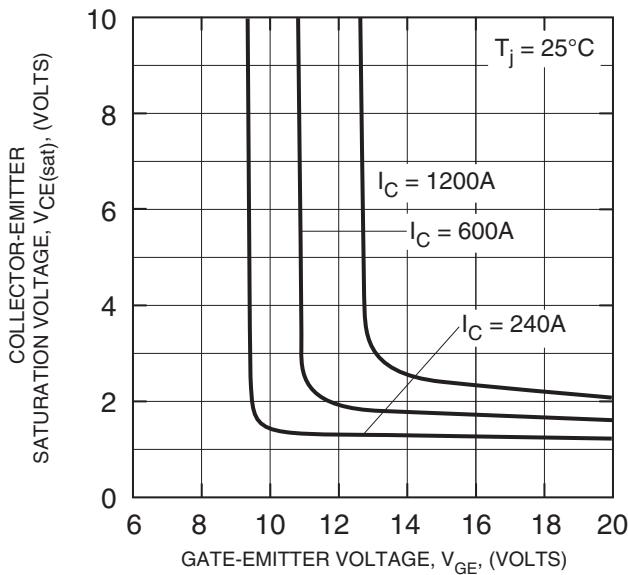

**FREE-WHEEL DIODE  
FORWARD CHARACTERISTICS  
(TYPICAL)**

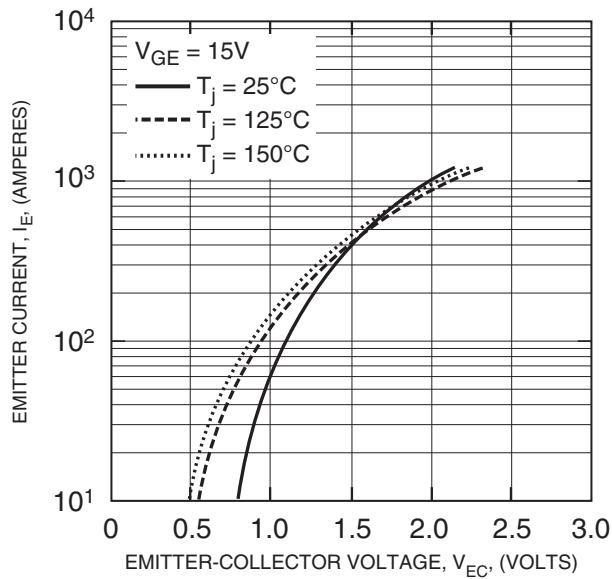


**CM600DXL-24S**  
**Dual IGBT NX-Series Module**  
600 Amperes/1200 Volts

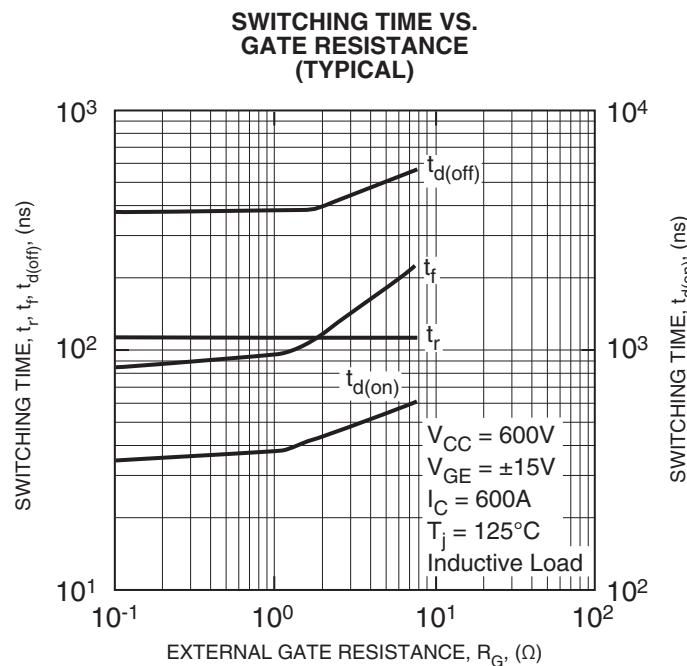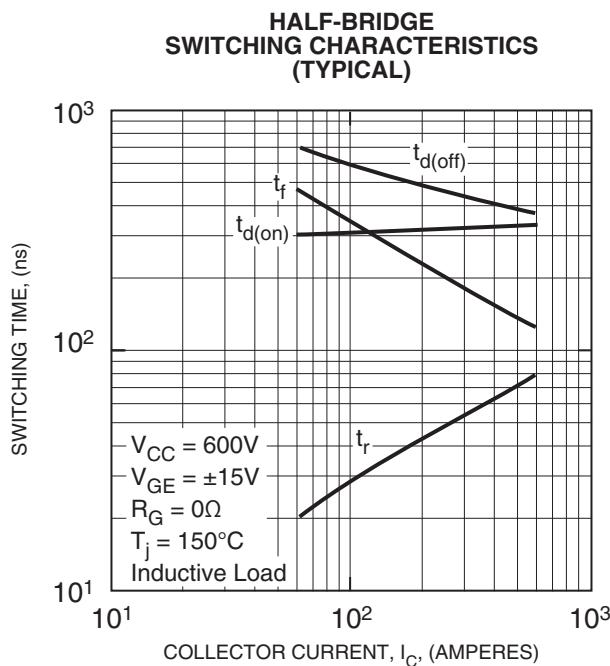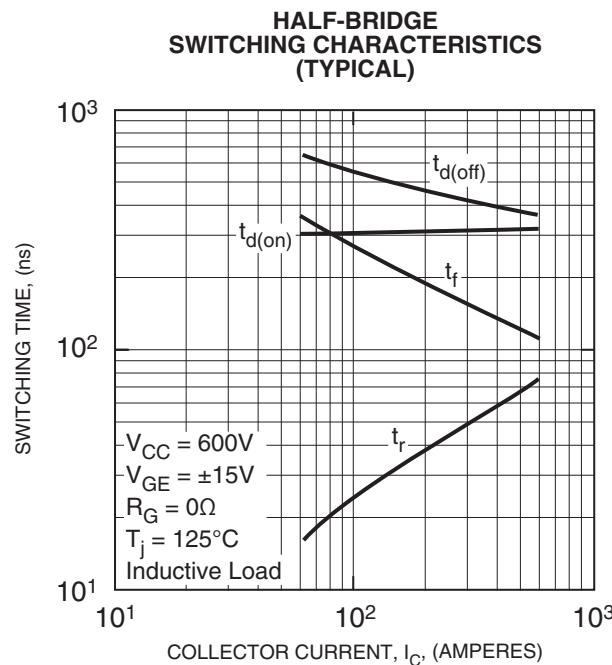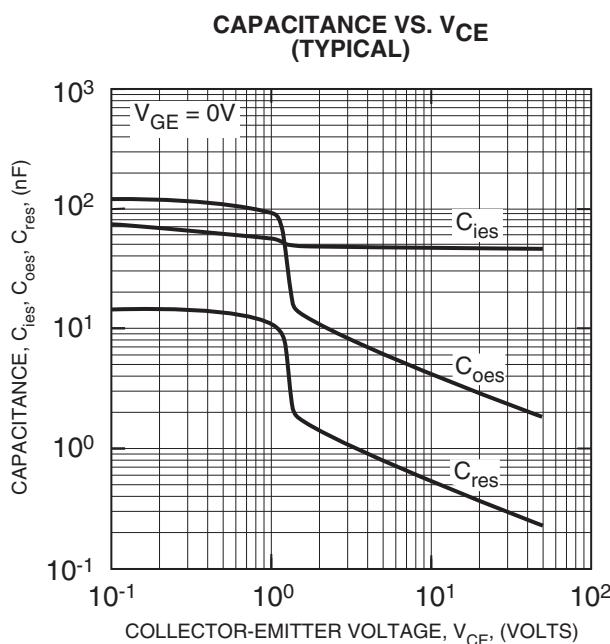


**CM600DXL-24S**  
**Dual IGBT NX-Series Module**  
600 Amperes/1200 Volts


**SWITCHING TIME VS.  
GATE RESISTANCE  
(TYPICAL)**

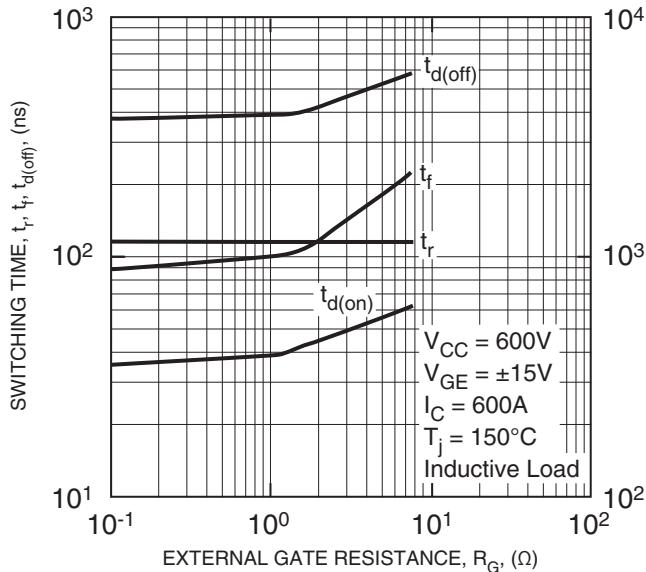


**REVERSE RECOVERY CHARACTERISTICS  
(TYPICAL)**

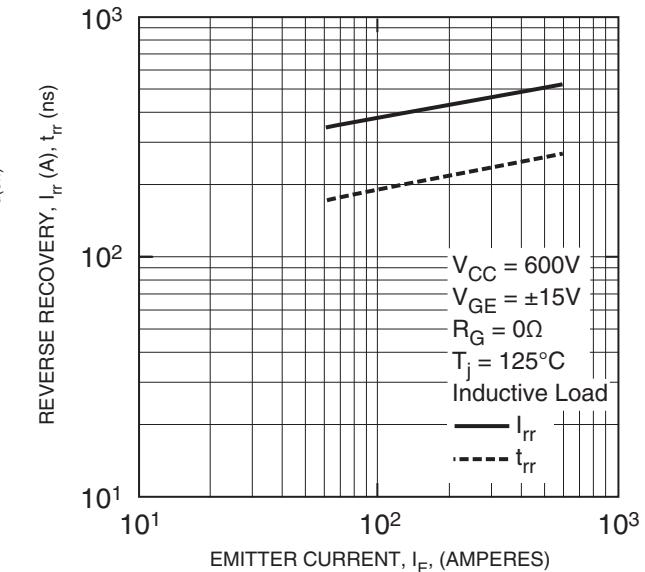

**REVERSE RECOVERY CHARACTERISTICS  
(TYPICAL)**

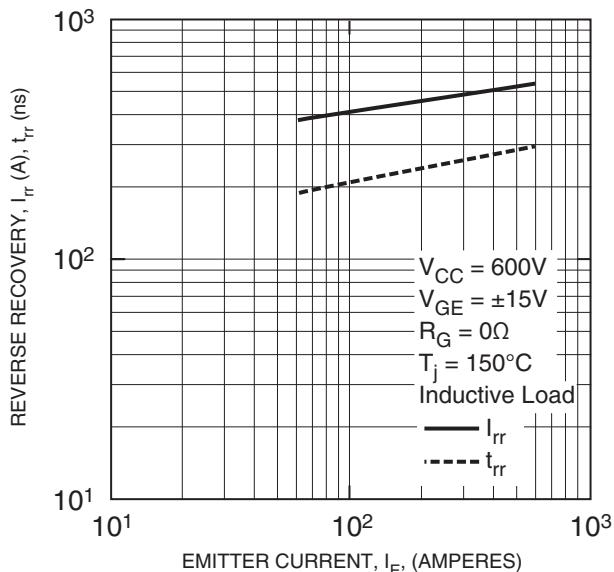


**GATE CHARGE VS.  $V_{GE}$**

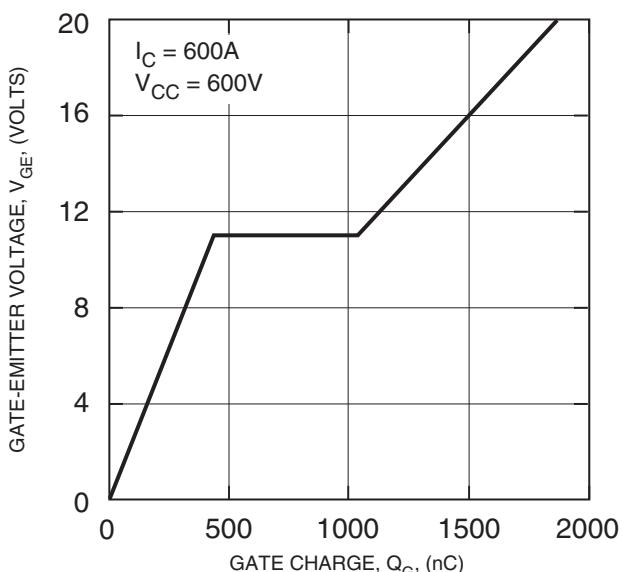


**CM600DXL-24S**  
**Dual IGBT NX-Series Module**  
 600 Amperes/1200 Volts


**HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)**

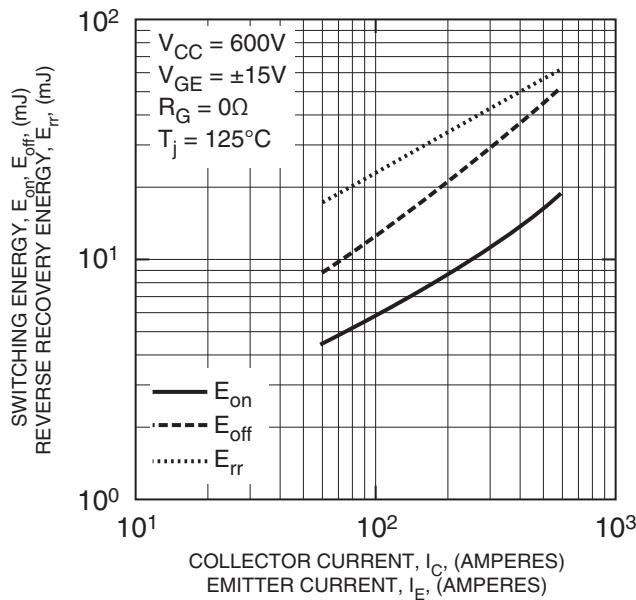


**HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)**

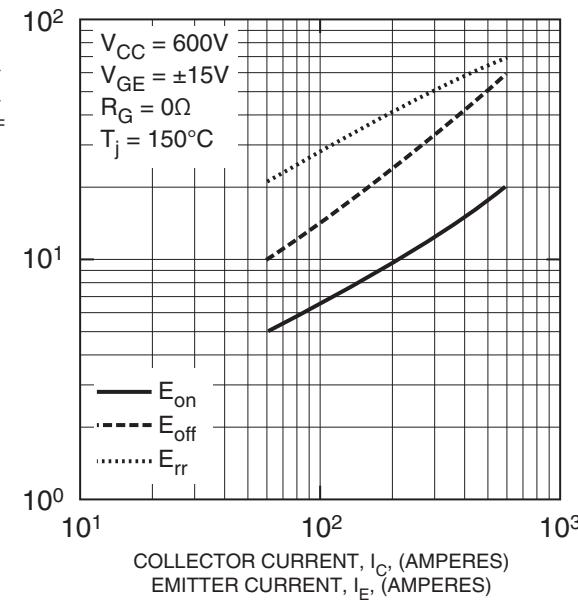

**HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)**

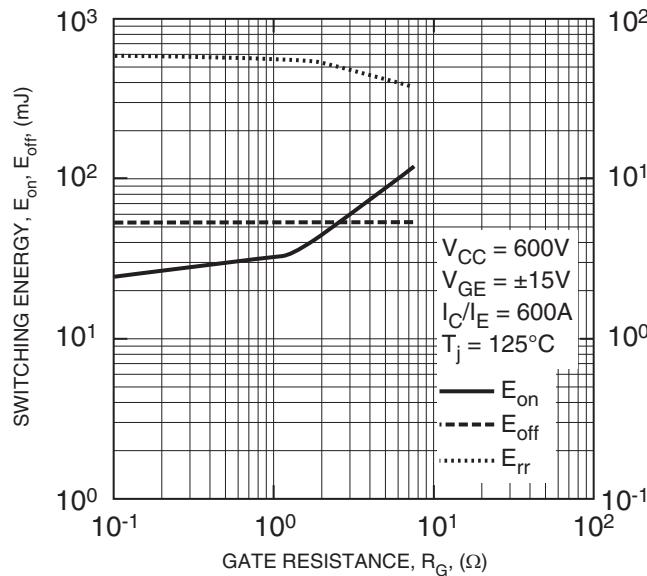

**HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)**

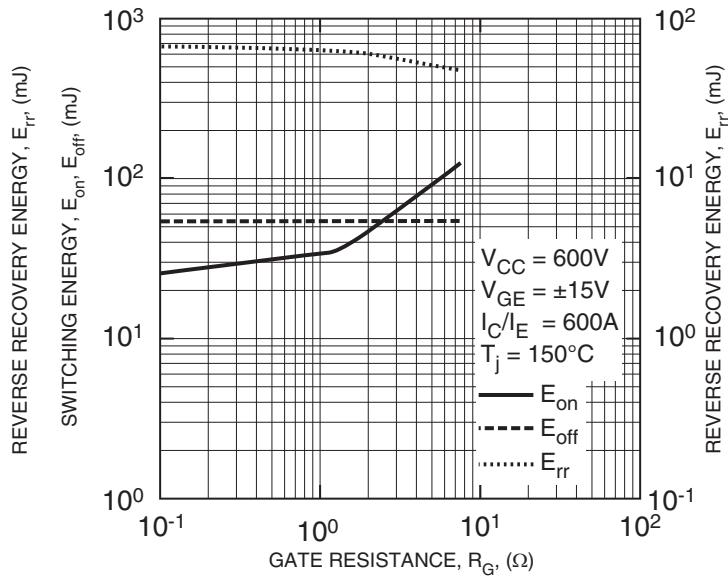

**CM600DXL-24S**  
**Dual IGBT NX-Series Module**  
600 Amperes/1200 Volts

