

PM100CL1A060
Intellimod™ L1-Series
Three Phase IGBT Inverter
 100 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PM100CL1A060	Units
Power Device Junction Temperature	T_j	-20 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws	—	31	in-lb
Module Weight (Typical)	—	380	Grams
Supply Voltage, Surge (Applied between P - N)	$V_{\text{CC(surge)}}$	500	Volts
Supply Voltage Protected by Short Circuit Protection Capability*	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	V_{ISO}	2500	Volts

IGBT Inverter Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current ($T_C = 25^\circ\text{C}$) (Note 1)	$\pm I_C$	100	Amperes
Peak Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_{\text{CP}}$	200	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$) (Note 1)	P_C	390	Watts

Control Sector

Supply Voltage (Applied between $V_{\text{UP1-VUPC}}$, $V_{\text{VP1-VVPC}}$, $V_{\text{WP1-VWPC}}$, $V_{\text{N1-VNC}}$)	V_D	20	Volts
Input Voltage (Applied between U_P-V_{UPC} , V_P-V_{VPC} , W_P-V_{WPC} , U_N-V_{N} , W_N-V_{NC})	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between $U_{\text{FO-VUPC}}$, $V_{\text{FO-VVPC}}$, $W_{\text{FO-VWPC}}$, F_O-V_{NC})	V_{FO}	20	Volts
Fault Output Current (Sink Current at U_{FO} , V_{FO} , W_{FO} , F_O Terminals)	I_{FO}	20	mA

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Emitter Saturation Voltage	$V_{\text{CE(sat)}}$	$V_D = 15\text{V}$, $V_{\text{CIN}} = 0\text{V}$, $I_C = 100\text{A}$, $T_j = 25^\circ\text{C}$	—	1.75	2.35	Volts
		$V_D = 15\text{V}$, $V_{\text{CIN}} = 0\text{V}$, $I_C = 100\text{A}$, $T_j = 125^\circ\text{C}$	—	1.75	2.35	Volts
Diode Forward Voltage	V_{EC}	$-I_C = 100\text{A}$, $V_{\text{CIN}} = 15\text{V}$, $V_D = 15\text{V}$	—	1.7	2.8	Volts
Inductive Load Switching Times	t_{on}		0.3	0.8	2.0	μs
	t_{rr}	$V_D = 15\text{V}$, $V_{\text{CIN}} = 0 \leftrightarrow 15\text{V}$	—	0.4	0.8	μs
	$t_{\text{C(on)}}$	$V_{\text{CC}} = 300\text{V}$, $I_C = 100\text{A}$	—	0.4	1.0	μs
	t_{off}	$T_j = 125^\circ\text{C}$	—	1.0	2.3	μs
	$t_{\text{C(off)}}$		—	0.3	1.0	μs
Collector-Emitter Cutoff Current	I_{CES}	$V_{\text{CE}} = V_{\text{CES}}$, $V_D = 15\text{V}$, $T_j = 25^\circ\text{C}$	—	—	1.0	mA
		$V_{\text{CE}} = V_{\text{CES}}$, $V_D = 15\text{V}$, $T_j = 125^\circ\text{C}$	—	—	10	mA

* $V_D = 13.5 \sim 16.5\text{V}$, Inverter Part, $T_j = 125^\circ\text{C}$

PM100CL1A060
Intellimod™ L1-Series
Three Phase IGBT Inverter
 100 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Sector						
Circuit Current	I_D	$V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{N1}-V_{NC}$	—	6	12	mA
		$V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{+P1}-V_{+PC}$	—	2	4	mA
Input ON Threshold Voltage	$V_{th(on)}$	Applied between U_P-V_{UPC} ,	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{th(off)}$	$V_P-V_{VPC}, W_P-V_{WPC}, U_N-V_N, W_N-V_{NC}$	1.7	2.0	2.3	Volts
Short Circuit Trip Level	SC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}, V_D = 15\text{V}$	200	—	—	Amperes
Short Circuit Current Delay Time	$t_{off(SC)}$	$V_D = 15\text{V}$	—	0.2	—	μs
Over Temperature Protection (Detect T_j of IGBT Chip)	OT	Trip Level	135	—	—	$^\circ\text{C}$
	$OT_{(hys)}$	Hysteresis Level	—	20	—	$^\circ\text{C}$
Supply Circuit Under-voltage Protection ($-20 \leq T_j \leq 125^\circ\text{C}$)	UV	Trip Level	11.5	12.0	12.5	Volts
	UV_R	Reset Level	—	12.5	—	Volts
Fault Output Current*	$I_{FO(H)}$	$V_D = 15\text{V}, V_{CIN} = 15\text{V}$	—	—	0.01	mA
	$I_{FO(L)}$	$V_D = 15\text{V}, V_{CIN} = 15\text{V}$	—	10	15	mA
Fault Output Pulse Width*	t_{FO}	$V_D = 15\text{V}$	1.0	1.8	—	ms

Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	IGBT (Per 1 Element) (Note 1)	—	—	0.32	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	FWDi (Per 1 Element) (Note 1)	—	—	0.52	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied (Note 1)	—	—	0.038	$^\circ\text{C/Watt}$


Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	≤ 400	Volts
Control Supply Voltage**	V_D	Applied between $V_{UP1}-V_{UPC}$, $V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC}, V_{N1}-V_{NC}$	15.0 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between U_P-V_{UPC} ,	≤ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$V_P-V_{VPC}, W_P-V_{WPC}, U_N-V_N, W_N-V_{NC}$	≥ 9.0	Volts
PWM Input Frequency	f_{PWM}	—	≤ 20	kHz
Arm Shoot-through Blocking Time	t_{DEAD}	Input Signal	≥ 2.0	μs

*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower arm device operates to protect it.

** With ripple satisfying the following conditions: dv/dt swing $\leq \pm 5\text{V}/\mu\text{s}$, Variation $\leq 2\text{V}$ peak to peak.

Note 1: T_C (under the chip) Measurement Point




Arm Axis	UP		VP		WP		UN		VN		WN	
	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi
X	28.6	28.6	65.4	65.4	87.4	87.4	38.6	38.6	54.6	54.6	76.6	76.6
Y	-9.0	-0.4	-9.0	-0.4	-9.0	-0.4	6.5	-1.1	6.5	-1.1	6.5	-1.1




PM100CL1A060
Intellimod™ L1-Series
Three Phase IGBT Inverter
 100 Amperes/600 Volts


OUTPUT CHARACTERISTICS (TYPICAL)

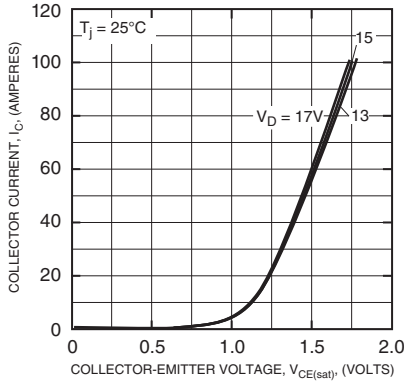


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

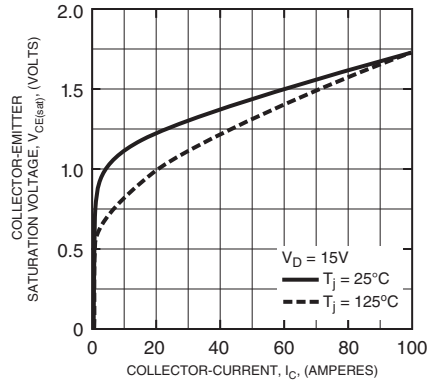


COLLECTOR-EMITTER SATURATION VOLTAGE VS. SUPPLY VOLTAGE CHARACTERISTICS (TYPICAL)

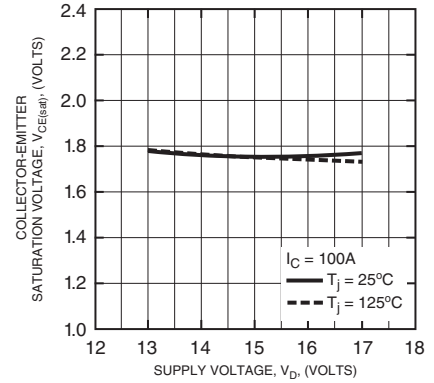


FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)

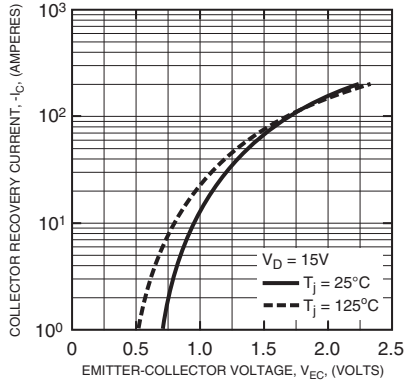


REVERSE RECOVERY CHARACTERISTICS (TYPICAL)

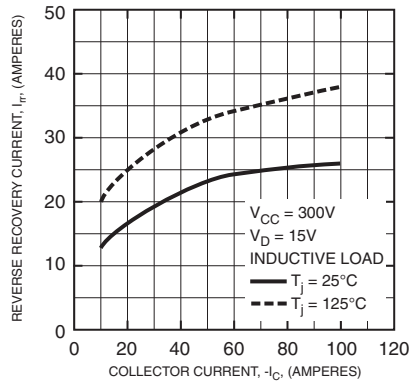


REVERSE RECOVERY CHARACTERISTICS (TYPICAL)

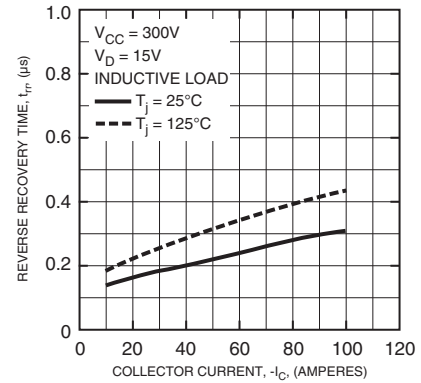


SWITCHING LOSS (ON) VS. COLLECTOR CURRENT (TYPICAL)

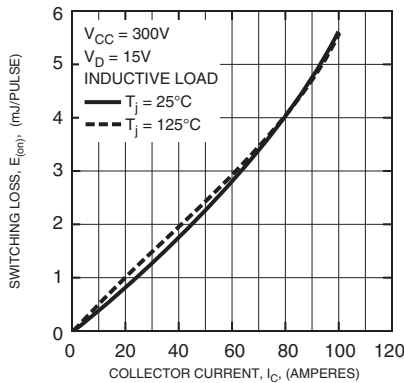

SWITCHING LOSS (OFF) VS. COLLECTOR CURRENT (TYPICAL)

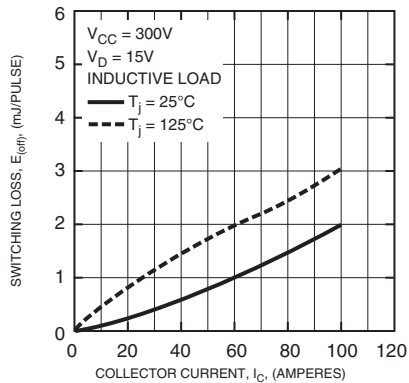

SWITCHING RECOVERY LOSS CHARACTERISTICS (TYPICAL)

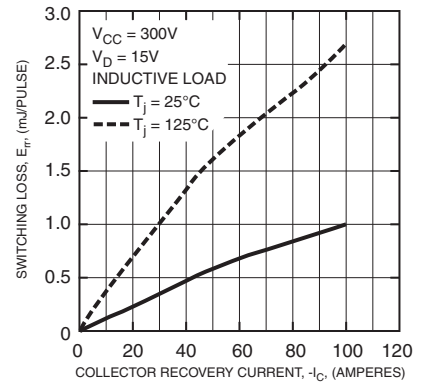

PM100CL1A060
Intellimod™ L1-Series
Three Phase IGBT Inverter
 100 Amperes/600 Volts

