


MODEL NUMBER  
ADT-2734-MM-3MM-02

NOTES:

- 1.0 MATERIALS:
- 1.1 HOUSING & NUTS: STAINLESS STEEL PER ASTM-A582, TYPE 303.
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.
- 2.0 PLATING:
- 2.1 HOUSING & NUTS: PASSIVATED PER MIL-F-14072 AND QQ-P-35
- 2.2 CENTER CONTACT: GOLD PER MIL-G-45204, TYPE II, CLASS 2.
- 3.0 ELECTRICAL SPECIFICATIONS:
- 3.1 FREQUENCY RANGE: DC to 26.5 GHz
- 3.2 VSWR (MAX.):  
DC to 20 GHz: 1.10:1  
20 to 26.5 GHz: 1.15:1
- 4.0 MARKING: MARK UNIT AS SHOWN (REF: INK-06088-27-03)
- 5.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

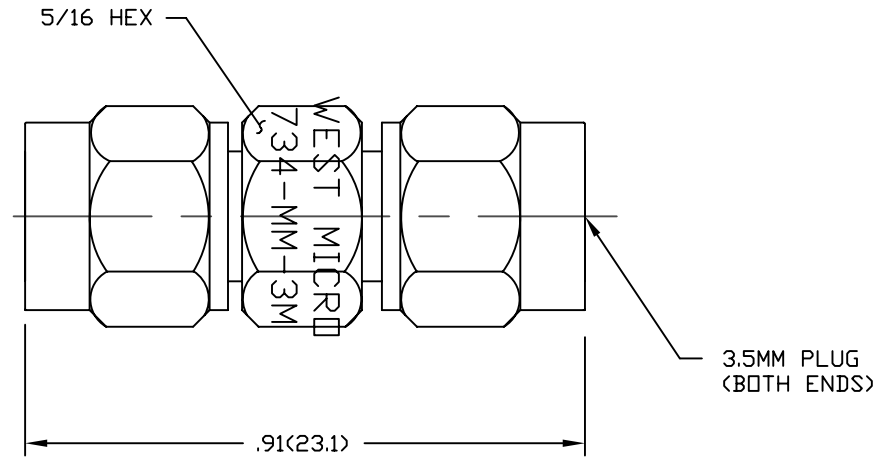

DWG NO. WAS: 05516-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	8/29/84
A	ECR 3701	7/2/85
B	ECR 6545	7/31/88
C	REDRAW ON CAD	11/20/92

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.</p> <p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'</p>	<p>CAGE CODE <b>34078</b></p>		<p><b>MIDWEST MICROWAVE</b></p>	
	<p><b>EMERSON</b> Network Power Connectivity Solutions</p>		<p>TITLE ADAPTER - 3.5MM PLUG TO 3.5MM PLUG OUTLINE DRAWING</p>	
	<p>DRAWN/DATE A.BEATTY 11/20/92</p>	<p>ENG./DATE A.OSGA 11/20/92</p>	<p>DRAWING NUMBER ADT-2734-MM-3MM-02-01</p>	<p>REV. C</p>
	<p>CHECKED/DATE M.HOLLMAN 11/20/92</p>	<p>APPROVED/DATE</p>	<p>SCALE: 5=1</p>	<p>SHEET 1 of 1</p>