

SPECIFICATIONS

Constituent

Mini USB 4Pin to USB A Type

Electrical

Operating Voltage: 30V AC

Operating Current: 1A max.

Contact Resistance: 5 max.

Mechanical

MINI Conn. Mating Force: 2kg max., Unmating Force: 0.4~2 kg

USB Conn. Mating Force: 3.5kg max., Unmating Force: 1.0kg min.

Physical

Color: Black

Operating Temperature: 0 °C to +60 °C

Agency Approvals

Raw Cable: UL 2835


Cable Assembly: UL E93839

USB Cables

CUHD4 Series
Mini USB 4 Pos. Cable



DRAWING

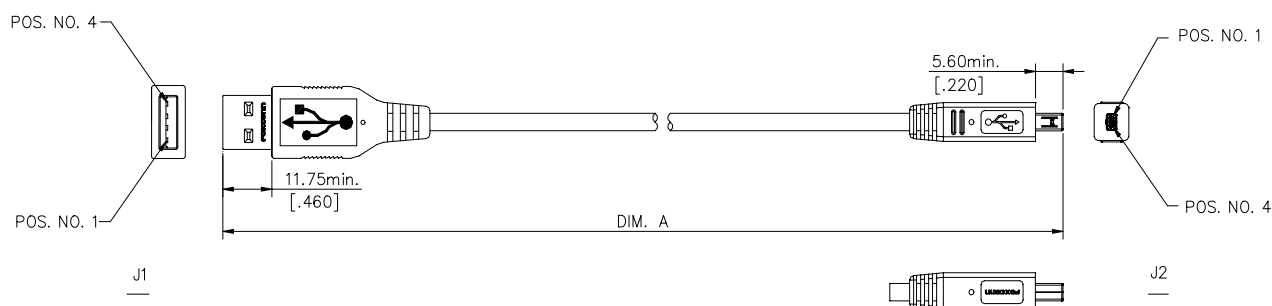

ORDERING INFORMATION

PRODUCT NO.: CU H D 4 ** B - P01

USB Cable
Mini USB B type
Dual Shielding
4=4Pin
Extension Code
USB A type
Length of Cable(feet)
03=3feet
06=6feet
10=10feet

CUHD410B-P01	3000 [118.11]
CUHD406B-P01	2000 [78.74]
CUHD403B-P01	1000 [39.37]
P/N	DIM. A

[Products](#)[News](#)[Sales](#)[Technical](#)[Jobs](#)[About Foxconn](#)

Quick Search

 Search By

-  Part Number
-  Product Type
-  Industry
-  Alphabetical

 Part Number

-  Enter Part Number

Starts With

Contains

Exact Match

 Search**Cable Assembly -> External Cable Assembly****Mini USB Cable Assembly: CUHD410B-P01-EF**

mini USB cable 4 pos

 Spec. Drawing

Feature	Attribute
Number of Positions:	4
Cable Assembly:	Mini USB Cable Assembly
Cable Length:	10FT
Operating Voltage:	30VAC
Operating Current:	1AMP Max
Insulation Resistance:	2M OHMS
Operating Temperature:	0• TO 60•
Agency Approvals:	UL
Available Status:	active
RoHS Status:	RoHS-6 compliant
Lead-free Replacement:	
Business Unit:	DSC
Lead-Time (Week):	6
MOQ (pc):	1000

Notice: Please confirm part availability with your local account manager.

