



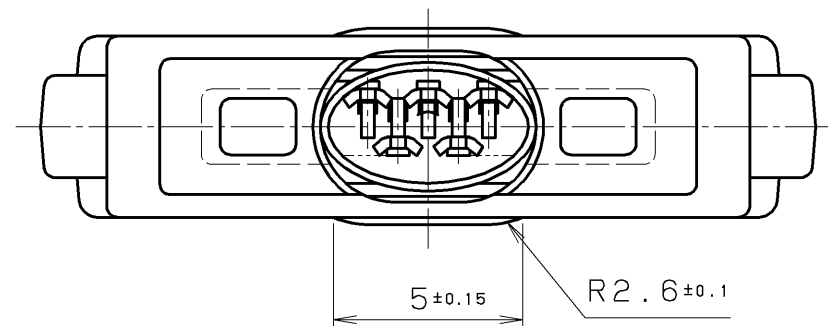

KEY POS.
MARKING
SEE TABLE #1

DATE CODE

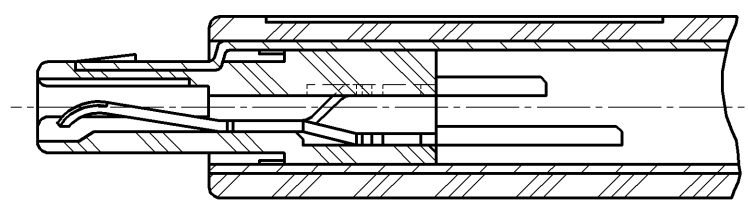

CONTACT DETAIL

- NOTE 1. CONTACT PLATING
CONTACT AREA: GOLD 0.1μm MIN.
OVER PALLADIUM/NICKEL (9:1) 1μm MIN.
TERMINAL AREA: GOLD
UNDERPLATING: NICKEL 1μm MIN.
2. APPLICABLE CABLE O.D. : 3~3.5mm
3. CABLE CLAMPING TOOL P/N: FHPT-0001C-B

4. COLOR OF PLASTIC HOOD	
P/N	COLOR
RMC-E15F4S-LC5-M () +	BLACK
RMC-E15F4S-LC5LG-M () +	LIGHT GRAY





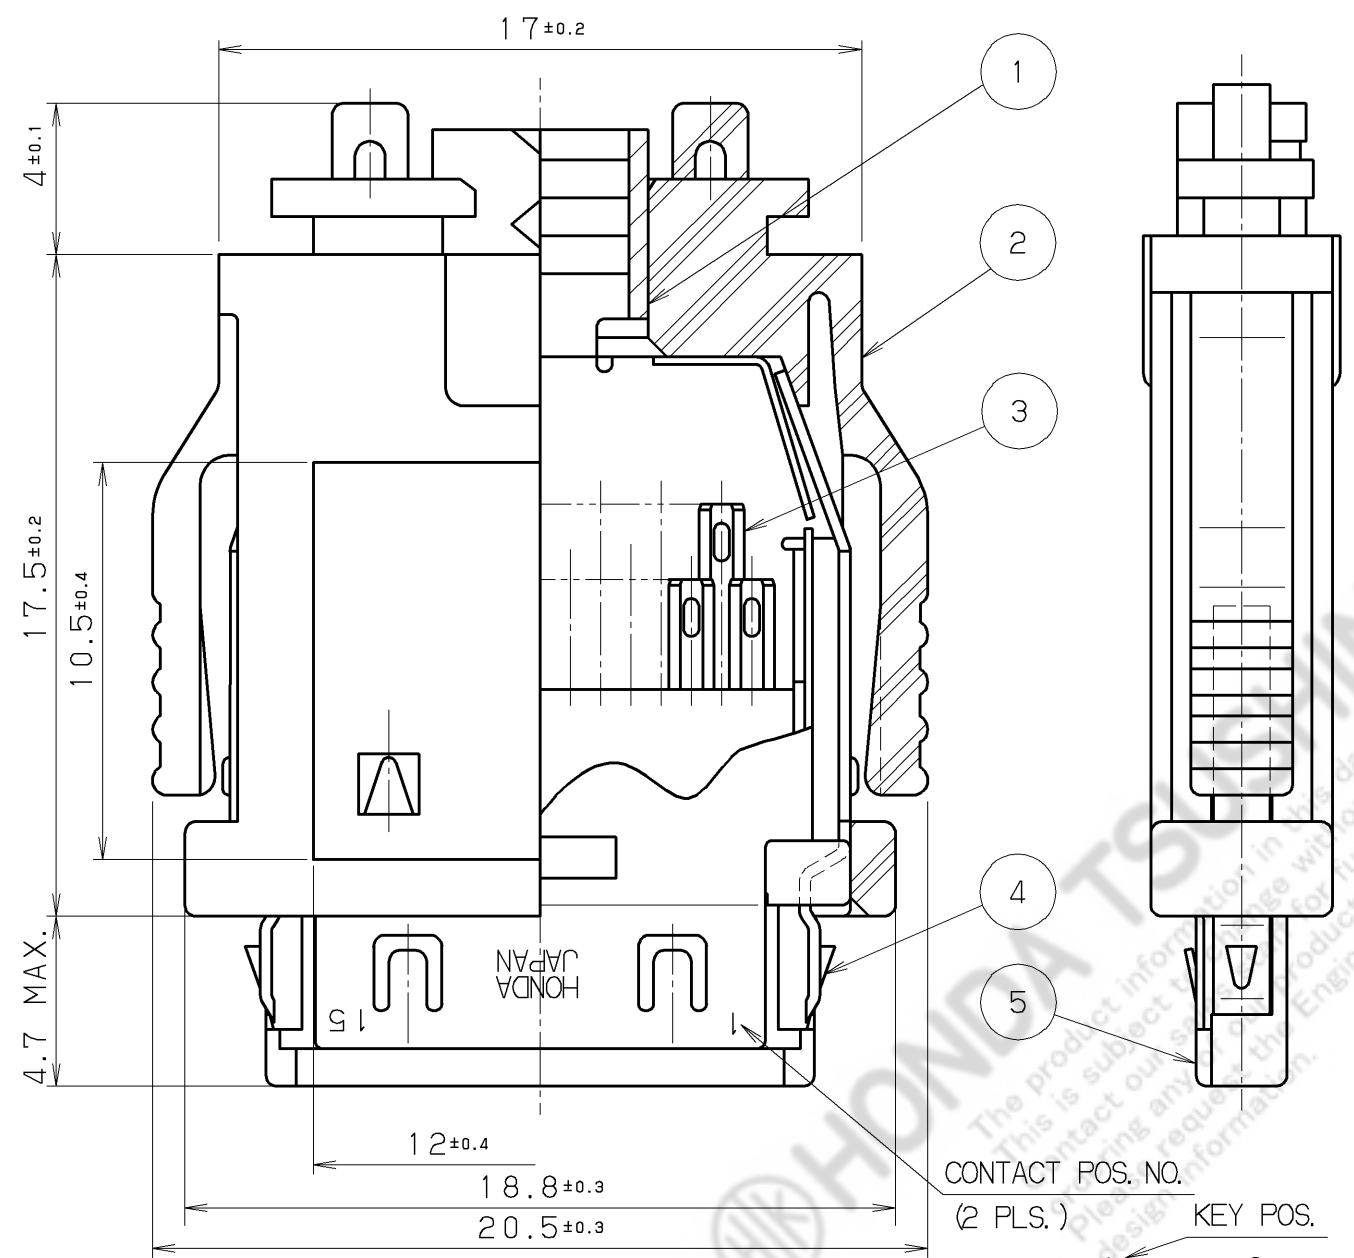



TABLE 1

P/N	KEY TYPE AND KEY POS.		KEY POS. MARKING	INSULATOR COLOR	MATING CONNECTOR	
RMC-E15F4S-LC5 () -MA13+	A		13	A13	BLACK	RMC-E (A) 15MY- () -MA2+
RMC-E15F4S-LC5 () -MB12+	B		12	B12	BROWN	RMC-E (A) 15MY- () -MB3+
RMC-E15F4S-LC5 () -MB12BK+			12	B12	BLACK	RMC-E (A) 15MY- () -MB3+
RMC-E15F4S-LC5 () -MC1+	C		1	C1	BLACK	RMC-E (A) 15MY- () -MC2+

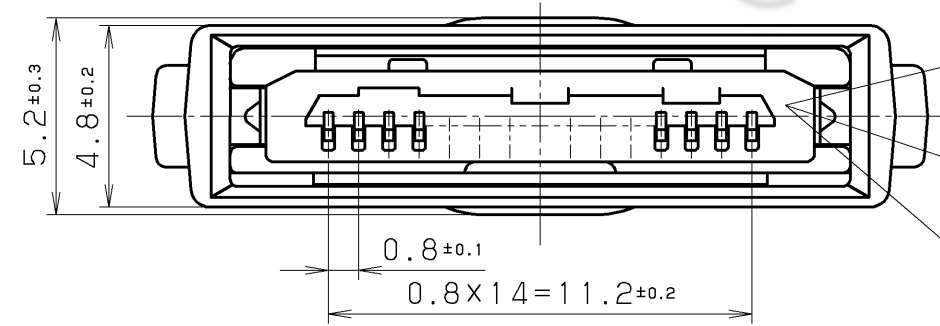

CONTACT POS. NO.
(2 PLS.)

KEY POS.

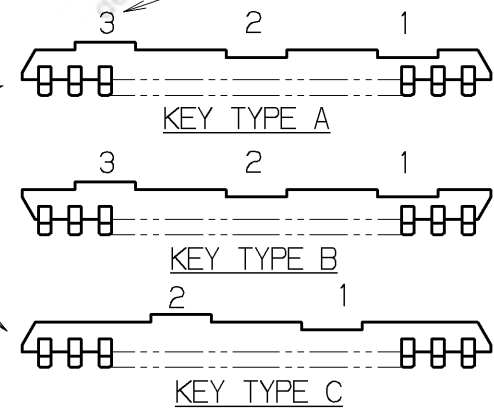

					5	INSULATOR	46NYLON (GF)	1	——	UL94V-0 SEE TABLE #1
					4	METAL COVER B	STAINLESS STEEL	1	——	——
△					3	FEMALE CONTACT	PHOSPHOR BRONZE	15	SEE NOTE #1	——
△					2	PLASTIC HOOD	PBT (NON GF)	1	——	UL94V-0 SEE NOTE #4
△					1	METAL COVER A	STAINLESS STEEL	1	——	——
LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
DATE MAR.31.2004		SCALE 5 / 1		UNIT mm (INCH)	3RD. A. P	HONDA TSUSHIN KOGYO CO., LTD.				
APP. DATE&REV.										
DR.		DE.		CHK.	CHK.	APP.	NAME		0.8mm SPACING FEMALE 15POS. CABLE SIDE I/O CONNECTOR (SOLDER TERMINATION TYPE) (RoHS)	
T. SOGO		T. SOGO		K. HOMMA	——	S. FURUSAWA	PART NO.		RMC-E15F4S-LC5 () -M () +	REV.