

# LMR1A - LMR1M

**PRV : 50 - 1000 Volts**  
**Io : 1.0 Ampere**


## FEATURES :

- \* Glass passivated junction chip
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Fast switching for high efficiency
- \* Pb / RoHS Free

## MECHANICAL DATA :

- \* Case : M1A Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.20 gram (approximately)

# GLASS PASSIVATED JUNCTION FAST RECOVERY RECTIFIERS

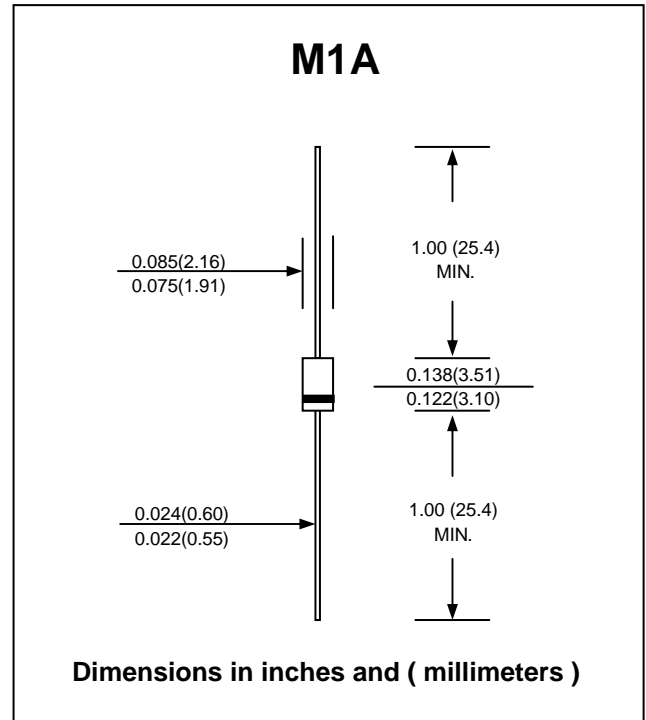

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.


RATING	SYMBOL	LMR1A	LMR1B	LMR1D	LMR1G	LMR1J	LMR1K	LMR1M	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Current 0.375"(9.5mm) Lead Length $T_a = 55\text{ }^\circ\text{C}$	$I_{F(AV)}$	1.0							A
Peak Forward Surge Current, 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	$I_{FSM}$	25							A
Maximum Peak Forward Voltage at $I_F = 1.0\text{ Amp.}$	$V_F$	1.4							V
Maximum DC Reverse Current $T_a = 25\text{ }^\circ\text{C}$ at Rated DC Blocking Voltage $T_a = 100\text{ }^\circ\text{C}$	$I_R$	5							$\mu\text{A}$
	$I_{R(H)}$	50							$\mu\text{A}$
Maximum Reverse Recovery Time ( Note 1 )	$T_{rr}$	150			250		500		ns
Typical Junction Capacitance ( Note 2 )	$C_J$	50							pF
Junction Temperature Range	$T_J$	- 65 to + 150							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	- 65 to + 150							$^\circ\text{C}$

### Notes :


- ( 1 ) Reverse Recovery Test Conditions :  $I_F = 0.5\text{ A}$ ,  $I_R = 1.0\text{ A}$ ,  $I_{rr} = 0.25\text{ A}$ .
- ( 2 ) Measured at 1.0 MHz and applied reverse voltage of 4.0 VDC

## RATING AND CHARACTERISTIC CURVES ( LMR1A - LMR1M )


**FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM**

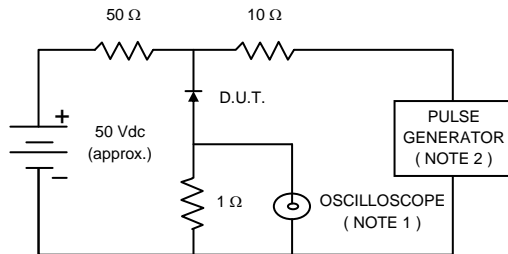


NOTES : 1. Rise Time = 7 ns max., Input Impedance = 1 megaohm, 22 pF.  
 2. Rise time = 10 ns max., Source Impedance = 50 ohms.  
 3. All Resistors = Non-inductive Types.

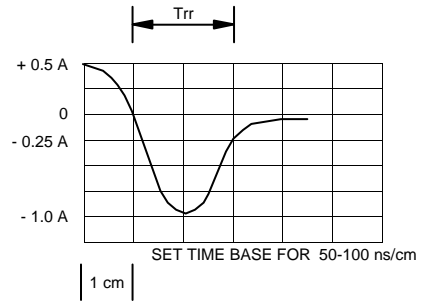


**FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

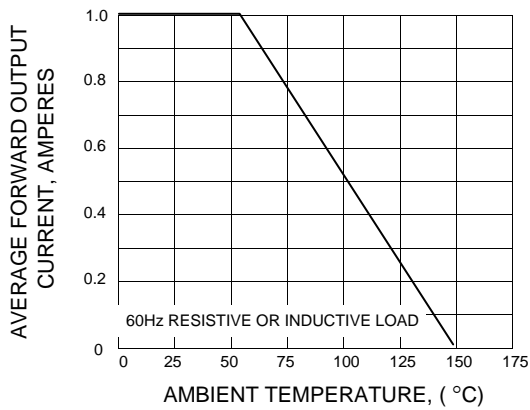

**FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

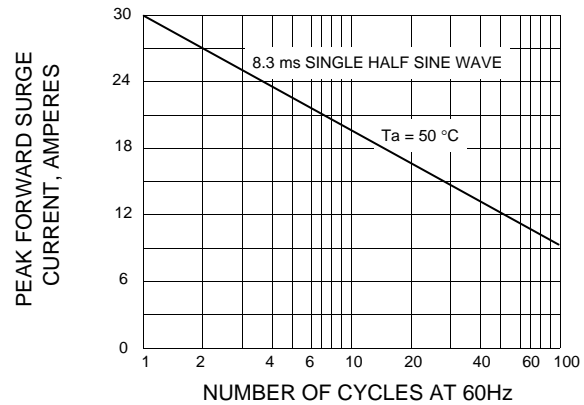

**FIG.4 - TYPICAL FORWARD CHARACTERISTICS**

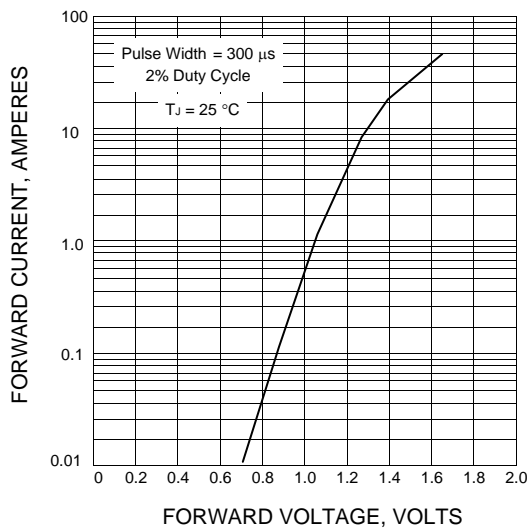

**FIG.5 - TYPICAL REVERSE CHARACTERISTICS**

