

**Small kVA 3 Phase Isolation Transformer****TT2126-TT2132**

<b>VA:</b>	350, 500, 750, 1000, 1500 2000, 3000	<b>Phase:</b>	Three-Phase
<b>Input Voltage:</b>	415 Delta	<b>Frequency:</b>	50 Hz
<b>Output Voltage:</b>	575 Delta	<b>BIL:</b>	4 kV
<b>Taps:</b>	See wiring diagram	<b>Coils:</b>	Copper
<b>Insulation Class:</b>	Class F 155° C	<b>Temp Rise:</b>	N/A
<b>Impedance:</b>	2.5 - 3.5%		

NEMA 1 Enclosure

**10** Full 10 Year Warranty**Feature Highlights**

10 Year Warranty  
UL Listed  
CSA Approved

- Copper windings
- 1.5 to 2 week build time
- Solidly fixed terminals with standard combination slotted Robertson head screw connections facilitate wiring.
- Built with heat-proof insulation for compact size and long life.
- Unique bobbin-wound coils for greater efficiency, superior heat evacuation, and compact structure.

**Optional Features**

- NEMA 4/4x
- Encapsulation
- Other voltages/multiple tap
- Electrostatic shield

Please call us for additional options.


**Small kVA 3 Phase Isolation Transformer**

**TT2126-TT2132**

**60 Hz**

TT2126	350 VA
TT2127	500 VA
TT2128	750 VA
TT2129	1000 VA
TT2130	1500 VA
TT2131	2000 VA
TT2132	3000 VA

Wiring Connection		
Pri. Volts	Connect Taps	Line Leads
415	1- X1 & 2- X2 & 3 - X3	X1, X2, X3
Sec. Volts	Connect Taps	Line Leads
575	1- H1 & 2- H2 & 3 - H3	H1, H2, H3

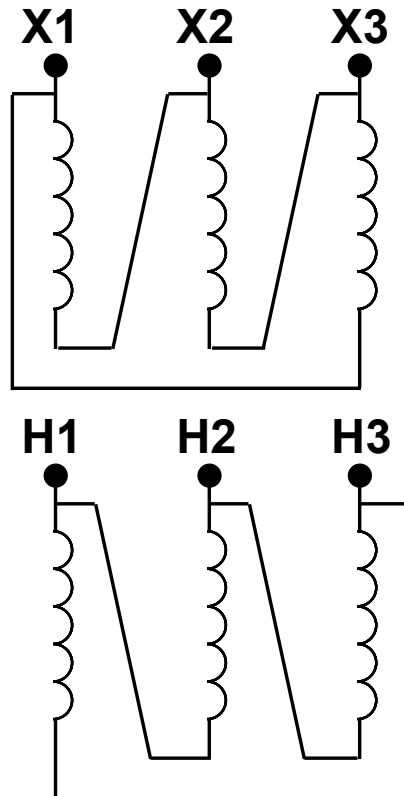


**Small kVA 3 Phase Isolation Transformer**

**TT2126-TT2132**

**Enclosed Units**

VA	350	500	750	1000	1500	2000	3000
<b>Part #</b> 60 Hz	TT2126	TT2127	TT2128	TT2129	TT2130	TT2131	TT2132
<b>Enclosure #</b>	1	1	2	2	2	2	2
<b>Enclosure Weight (lbs.)</b>	22	24	37	40	54	60	69

**No. 1 ENCLOSURE** (With 4 x 0.5" mounting holes)

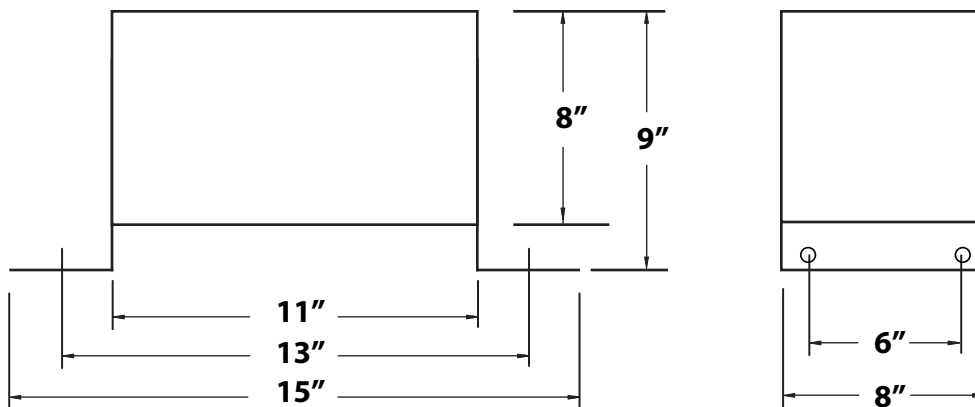

**No. 2 ENCLOSURE** (With 4 x 0.5" mounting holes)

