

RoHS Compliant Product
A suffix of "-C" specifies halogen free

DESCRIPTION

The SL117A is a low dropout at positive adjustable or fixed-mode regulator with minimum of 1A output current capability. The product is specifically designed to provide well-regulated supply for low voltage IC applications such as high-speed bus termination and low current 3.3V logic supply. SL117A is also well suited for other applications such as VGA cards. SL117A is guaranteed to have lower than 1.4V dropout at full load current making it ideal to provide well-regulated outputs of 1.25 to 5.0 with 6.4V to 12V input supply.

FEATURES


- 1.4V maximum dropout full load current
- Fast transient response
- Output current limiting
- Built-in thermal shutdown
- Good noise rejection
- 3-Terminal Adjustable or Fixed 1.5V, 1.8V, 2.5V, 3.3V, 5.0V

APPLICATIONS


- PC peripheral
- Communication

MARKING

Production A Line

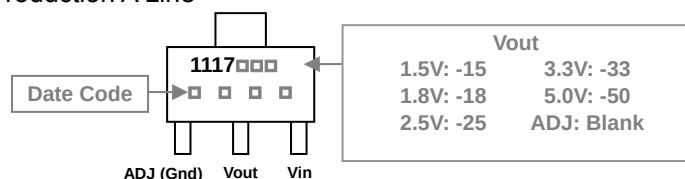


Production B Line

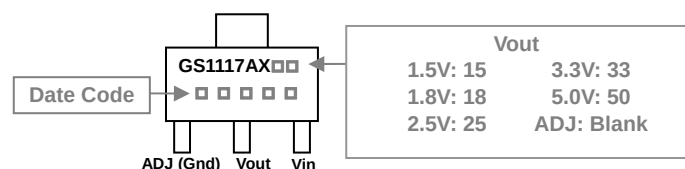

PACKAGE INFORMATION


Package	MPQ	Leader Size
SOT-223	2.5K	13' inch

SOT-223

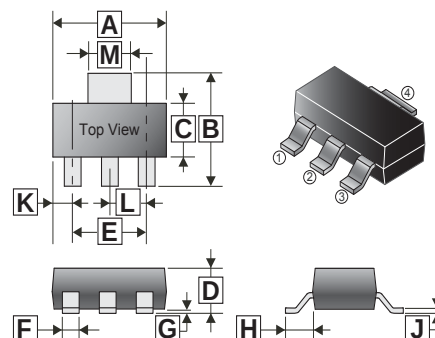


REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.30	6.70	G	0.02	0.10
B	6.70	7.30	H	1.50	2.00
C	3.30	3.70	J	0.25	0.35
D	1.42	1.90	K	0.85	1.05
E	4.60	REF.	L	2.30	REF.
F	0.60	0.80	M	2.90	3.10

TYPICAL CIRCUIT

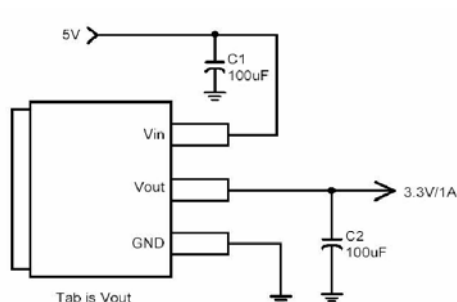


(5V/3.3V fixed output)

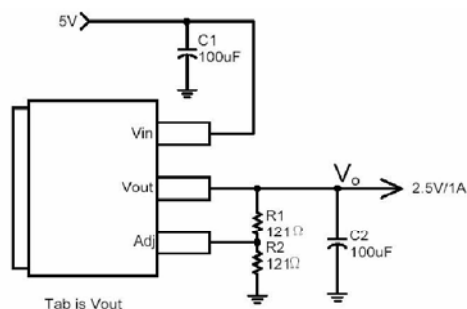

(5V/2.5V ADJ output)

$$\text{Note: } V_o = V_{\text{REF}} * \left(1 + \frac{R_2}{R_1}\right)$$

BLOCK DIAGRAM

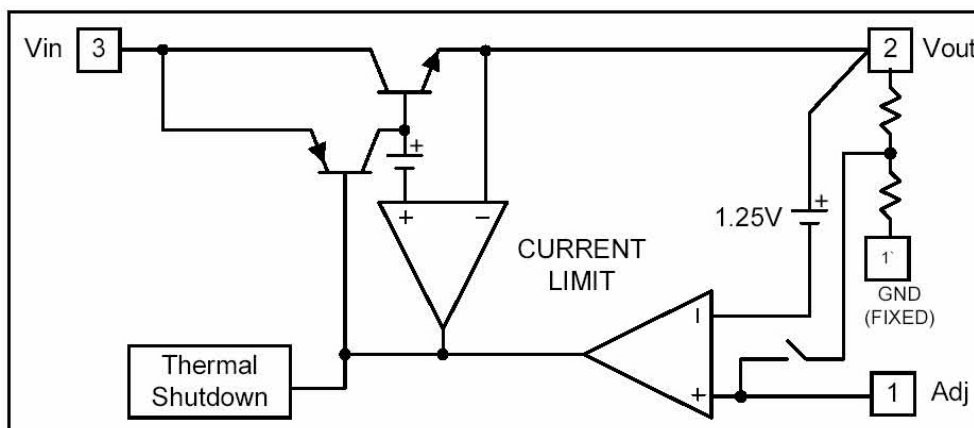

PIN DESCRIPTIONS

Name	I/O	Pin#	Description
Adj (Gnd)		1	A resistor divider from this pin to the V_{OUT} pin and ground sets the output voltage (Ground only for fixed mode)
V_{OUT}	O	2	The output pin of regulator. A min. of 10μF capacitor must be connected from this pin to ground to insure stability.
V_{IN}	I	3	The input pin of regulator. Typically a large storage capacitor is connected from this pin to ground to insure that the input voltage does not sag below the min. dropout voltage during the load transient response. This pin must always be 1.3V higher than V_{OUT} in order for the device to regulate properly.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Ratings	Unit
DC Supply Voltage	V_{in}	-0.3 to 15	V
Power Dissipation ($T_A = 25^\circ\text{C}$)	P_D	850	mW
Operating, Storage Temperature Range	$T_{\text{OPR}}, T_{\text{STG}}$	0~125, -65~150	$^\circ\text{C}$
Maximum Junction Temperature	T_{MJ}	150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS

Parameter	Test Conditions		Min.	Typ.	Max	Unit
Reference Voltage	SL117A-ADJ	$I_o=10\text{mA}$, $T_J=25^\circ\text{C}$, $(V_{IN} - V_{OUT})=1.5\text{V}$	1.225	1.25	1.275	V
Output Voltage	SL117A-1.5	$I_o=10\text{mA}$, $T_J=25^\circ\text{C}$, $3.0\text{V} \leq V_{IN} \leq 12\text{V}$	1.47	1.5	1.53	V
	SL117A-1.8	$I_o=10\text{mA}$, $T_J=25^\circ\text{C}$, $3.3\text{V} \leq V_{IN} \leq 12\text{V}$	1.764	1.8	1.836	V
	SL117A-2.5	$I_o=10\text{mA}$, $T_J=25^\circ\text{C}$, $4.0\text{V} \leq V_{IN} \leq 12\text{V}$	2.45	2.5	2.55	V
	SL117A-3.3	$I_o=10\text{mA}$, $T_J=25^\circ\text{C}$, $4.8\text{V} \leq V_{IN} \leq 12\text{V}$	3.235	3.3	3.365	V
	SL117A-5.0	$I_o=10\text{mA}$, $T_J=25^\circ\text{C}$, $6.5\text{V} \leq V_{IN} \leq 12\text{V}$	4.9	5	5.1	V
Line Regulation	SL117A-XXX	$I_o=10\text{mA}$, $V_{out}+1.5\text{V} < V_{IN} < 12\text{V}$, $T_J=25^\circ\text{C}$	-	-	0.2	%
Load Regulation	SL117A-ADJ ^{1,2}	$V_{IN}=3.3\text{V}$, $V_{adj}=0$, $10\text{mA} < I_o < 1\text{A}$, $T_J=25^\circ\text{C}$	-	-	1	%
	SL117A-1.5 ^{1,2}	$V_{IN}=3.0\text{V}$, $0\text{mA} < I_o < 1\text{A}$, $T_J=25^\circ\text{C}$	-	12	15	mV
	SL117A-1.8 ^{1,2}	$V_{IN}=3.3\text{V}$, $0\text{mA} < I_o < 1\text{A}$, $T_J=25^\circ\text{C}$	-	15	18	mV
	SL117A-2.5 ^{1,2}	$V_{IN}=4.0\text{V}$, $0\text{mA} < I_o < 1\text{A}$, $T_J=25^\circ\text{C}$	-	20	25	mV
	SL117A-3.3 ^{1,2}	$V_{IN}=5.0\text{V}$, $0\text{mA} < I_o < 1\text{A}$, $T_J=25^\circ\text{C}$	-	26	33	mV
	SL117A-5.0 ^{1,2}	$V_{IN}=8.0\text{V}$, $0\text{mA} < I_o < 1\text{A}$, $T_J=25^\circ\text{C}$	-	40	50	mV
Dropout Voltage ($V_{IN}-V_{OUT}$)	SL117A-XXX	$I_o=1\text{A}$, ($\Delta V_{out}=0.1\% V_{out}$)	-	1.3	1.4	V
Current Limit	SL117A-XXX	$V_{IN} - V_{OUT} = 5\text{V}$	1.1	-	-	A
Minimum Load Current	Adjustable model	$V_{IN}=5\text{V}$	-	5	10	mA
Adjust Pin Current	Adjustable model	$V_{IN}=12\text{V}$, $I_o=10\text{mA}$	-	50	100	μA
Quiescent Current	fixed model	$V_{IN}=12\text{V}$, $I_o=0\text{mA}$	-	-	12	mA
Thermal Regulation	$T_A=25^\circ\text{C}$, 30ms pulse		-	0.008	0.04	%/W
Ripple Rejection	$F=120\text{Hz}$, $C_{OUT}=25\mu\text{F}$ Tantalum, $I_{OUT}=1\text{A}$					
	SL117A-XXX	$V_{IN}=V_{OUT}+3\text{V}$	-	60	70	dB
Temperature Stability	$I_o=10\text{mA}$		-	0.5	-	%
θ_{JA} Thermal Resistance Junction-to-Ambient (No heat sink ;No air flow)			-	117	-	$^\circ\text{C/W}$
θ_{JC} Thermal Resistance Junction-to-Case	Control Circuitry/Power Transistor		-	15	-	$^\circ\text{C/W}$

Note:

- See thermal regulation specifications for changes in output voltage due to heating effects. Line and load regulation are measured at a constant junction Temperature by low duty cycle pulse testing. Load regulation is measured at the output lead $\approx 1/18"$ from the package.
- Line and load regulation are guaranteed up to the maximum power dissipation of 3W. Power dissipation is determined by the difference in input and output and the output current. Guaranteed maximum power dissipation will not be available over the full input/output range.

CHARACTERISTIC CURVES

