




Cell Type UF504547F

Specifications

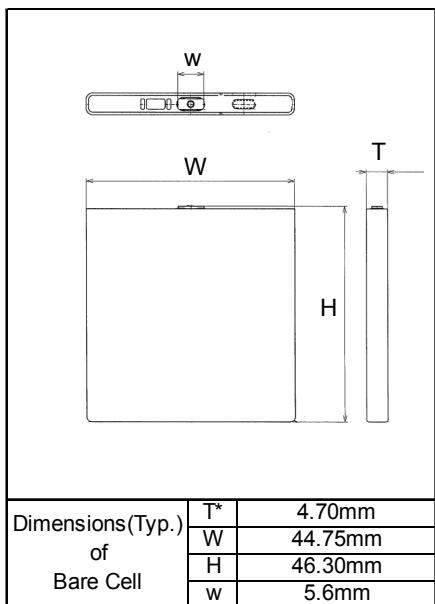


Nominal Capacity		Min. 1240mAh
Nominal Voltage		3.7V
Charging Method		Constant Current -Constant Voltage
Charging Voltage		4.2V
Charging Current		Std. 1240mA
Charging Time		3hrs.
Ambient Temperature	Charge	0 ~ +40°C
	Discharge	-20 ~ +60°C
	Storage	-20 ~ +50°C
Weight (Max.)		25.0g
Dimensions (Max.)	(T)**	5.00mm
	(W)	44.90mm
	(H)	46.60mm
Volumetric Energy Density		438Wh/l
Gravimetric Energy Density		183Wh/kg

*Discharged State after Assembling


**The maximum thickness of the standard shipment charging condition

Typical Characteristics

Discharge rate characteristics

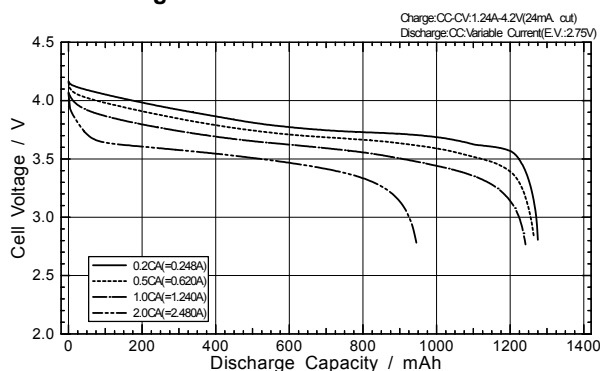

Discharge temperature characteristics

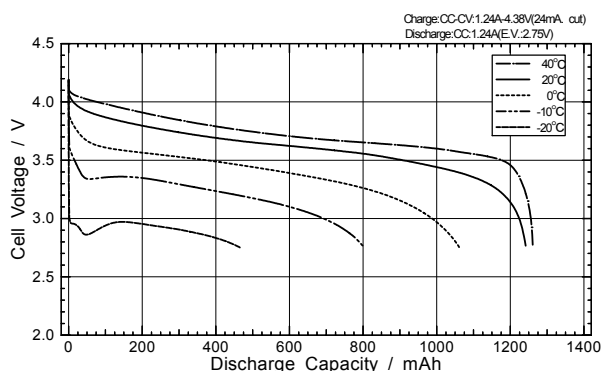

Charge characteristics

