


EPR1306FE

- Twelve Transformers in SMD Package
- Return Loss meets G.703 Requirements
- Operating Temperature : -40°C to +85°C
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

Primary Inductance (μ H Min.) @ 25°C	Primary Inductance (μ H Min.) @ -40°C	Leakage Inductance (μ H Max.)	Interwinding Capacitance (pF Max.)	Turns Ratio (\pm 2%)	Crosstalk (dB Min.)
60	40	.12	12	1: 1	35 @ 100 MHz

Schematic

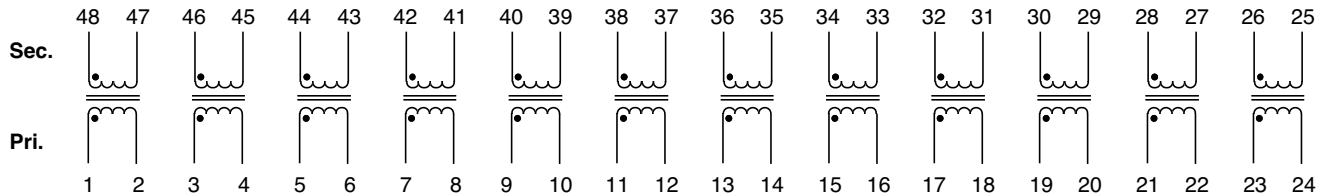

Package

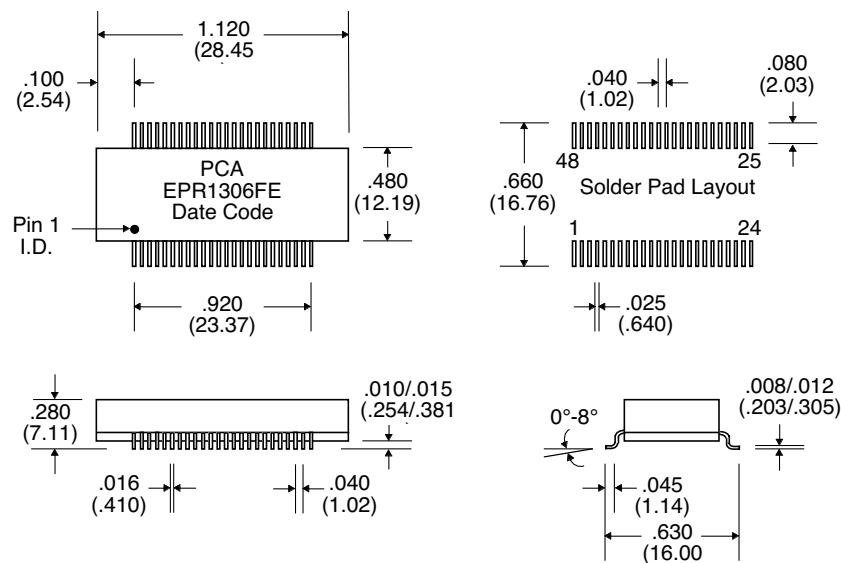

Unless Otherwise Specified Dimensions are in Inches /mm \pm .010 / .25