



World Wide [Change](#)

[Home](#) [Products](#) [Support](#) [Service](#) [Selectors](#) [How to Buy](#)


## Basic Rack PDU

# Rack PDU, Basic, 1U, 30A, 208V, (4) C19s

AP9570

[Email Technical Specification](#)

[Printer Friendly](#)

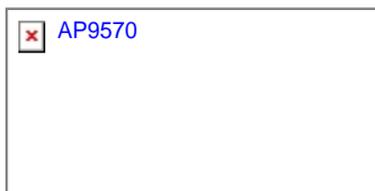

APC Basic Rack PDU , Input: 208V , Input Connections: NEMA L6-30P , Cord Length: 10 feet ( 3.05 meters ) , Output: 208V , Output Connections: IEC 320 C19



**Includes** Installation guide, Rack Mounting brackets

**Standard Lead Time** Usually in Stock

[More Images](#)

[Technical Specifications](#) [Product Overview](#) [Documentation](#) [Options](#)

## Output

Nominal Output Voltage

208V

Maximum Total Current Draw per Phase

24A

Output Connections

(4) IEC 320 C19

Overload Protection

Yes

## Input

Nominal Input Voltage

208V

Input Frequency

50/60 Hz

Regulatory Derated Input Current

24A

Input Connections

NEMA L6-30P



Cord Length

3.05 meters

Number of Power Cords

1

Acceptable Input Voltage

200-240 VAC

Maximum Line Current per phase

30A

Maximum Input Current per phase

30A

Load Capacity

4992 VA

## Physical

Net Weight

2.73 KG

Maximum Height

44.00 mm

Maximum Width

447.00 mm

Maximum depth

57.00 mm

Shipping Weight

3.86 KG

Shipping Height

70.00 mm

Shipping Width

464.00 mm

Shipping Depth

229.00 mm

Color

Black

## Environmental

Operating Environment

0 - 45 °C

Operating Relative Humidity

0 - 95%

Operating Elevation

0-3000 meters

Storage Temperature

-25 - 65 °C

Storage Relative Humidity

0 - 95%

Storage Elevation

0-15000 meters

## Conformance

Regulatory Approvals

cUL Listed,CSA,METI Denan,UL 60950,UL Listed

Standard Warranty

2 years repair or replace