



液晶之友 电话: 020-33819057  
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

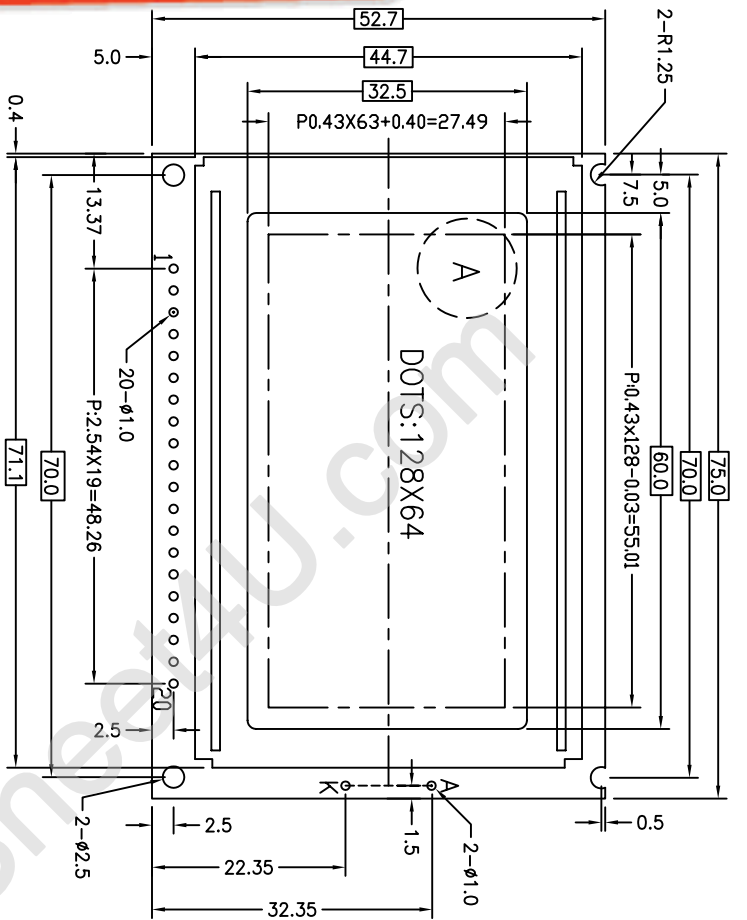


1	2	3	4	5	6	7	8	9	10
V <sub>DD</sub>	V <sub>SS</sub>	V <sub>EE</sub>	DB0	DB1	DB2	DB3	DB4	DB5	DB6
11	12	13	14	15	16	17	18	19	20
DB7	CS1	CS2	RST	R/W	D/I	E	F <sub>GND</sub>	A	K

NOTES:

1. DISPLAY TYPE: STN/Y-G MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSPARENT/POSITIVE
4. DRIVE METHOD: 1/64 DUTY 1/9 BIAS
5. LCD OPERATING VOLTAGE: 12.0V VDD=5.0V
6. OPERATING TEMP: 0°C~+50°C
7. STORAGE TEMP: -20°C~+60°C
8. CONTROLLER: S6B0108A01-COCX
9. BACKLIGHT: LED(4.2V,YELLOW)
10. BEZEL IS TO BE PAINTED BLACK
11. UNMARKED TOLERANCE: ±0.3mm
12. THE CONTROLLED DIMENSION MASK TO BE
13. CS1 AND CS2: CHIP SELECT SIGNAL (ACTIVE AT HIGH)

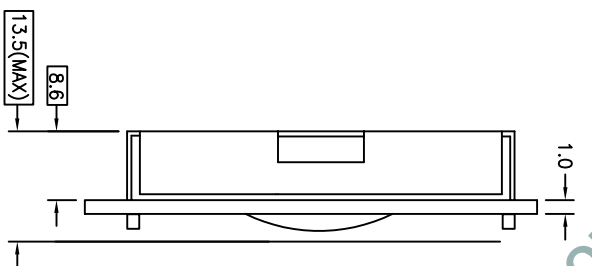

DETAIL A:

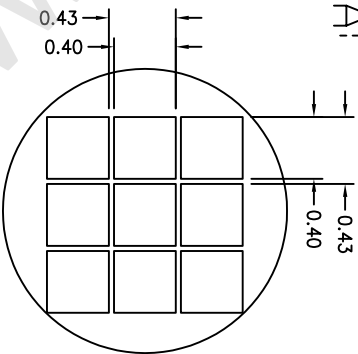

**TIAN-MA MICROELECTRONICS CO.**

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	BY:	TITLE: TM12864DBC10-1	SCALE:	UNIT: mm
CHECKED BY:	BY:	DWG NO: G-1	UNIT: mm	
APPROVED BY:	BY:			
CONFIRMED BY:	BY:	DWG NAME: TM12864DBC10-1G-1	SHEET NO: 1	QP 1