


Silicon Power Rectifier S/R21 Series

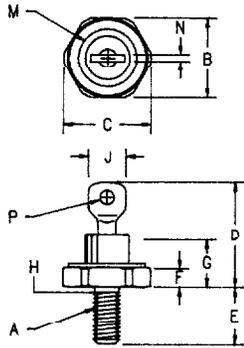

- Notes:
1. 10-32 UNF3A
 2. Full threads within 2 1/2 threads
 3. Standard Polarity: Stud is Cathode
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1
B	.424	.437	10.77	11.10	
C	---	.505	---	12.82	
D	.600	.800	15.24	20.32	
E	.422	.453	10.72	11.50	
F	.075	.175	1.91	4.44	
G	---	.405	---	10.29	
H	.163	.189	4.15	4.80	2
J	---	.310	---	7.87	
M	---	.350	---	8.89	Dia
N	.020	.065	.510	1.65	
P	.070	.100	1.78	2.54	Dia

DO203AA (D04)

Microsemi Catalog Number	JEDEC Numbers	Peak Reverse Voltage
Standard		
*S2120		200V
*S2140	1N1204, 1N1204A, 1N2254, 1N2785, 1N3620, 1N3965, 1N4507	400V
*S2160	1N1206, 1N1206A, 1N2258, 1N3622, 1N3966, 1N4508	600V
*S2180	1N2260, 1N3623, 1N3671, 1N3671A, 1N3967, 1N4509	800V
*S21100	1N2262, 1N3624, 1N3673, 1N3673A,	1000V
*S21120	1N4511, 1N5331	1200V
*S21140		1400V
*S21160		1600V

*Change S to R in part number for Reverse Polarity

- Glass Passivated Die
- Low Forward Voltage
- 250A Surge Rating
- Glass to metal construction
- V_{RRM} to 1600V
- Excellent reliability



Electrical Characteristics		
Average forward current	$I_F(AV)$ 22 Amps	$T_C = 134^\circ C$, half sine wave, $R_{\theta JC} = 2.5^\circ C/W$
Maximum surge current	I_{FSM} 250 Amps	8.3ms, half sine, $T_J = 200^\circ C$
Max $I^2 t$ for fusing	$I^2 t$ 260 A ² s	
Max peak forward voltage	V_{FM} 1.2 Volts	$I_{FM} = 30A; T_J = 25^\circ C *$
Max peak reverse current	I_{RM} 10 μA	$V_{RRM}, T_J = 25^\circ C$
Max peak reverse current	I_{RM} 1.0 mA	$V_{RRM}, T_J = 150^\circ C$
Max Recommended Operating Frequency	10kHz	

*Pulse test: Pulse width 300 μsec . Duty cycle 2%

Thermal and Mechanical Characteristics		
Storage temperature range	T_{STG}	-65°C to 200°C
Operating junction temp range	T_J	-65°C to 200°C
Maximum thermal resistance	$R_{\theta JC}$	2.5°C/W Junction to Case
Typical thermal resistance	$R_{\theta JC}$	2.0°C/W Junction to Case
Mounting torque		30 inch pounds maximum
Weight		.16 ounces (5.0 grams) typical

PH: 303-469-2161
FAX: 303-466-3775

Microsemi Corp.
Colorado

S/R21

Figure 1
Typical Forward Characteristics

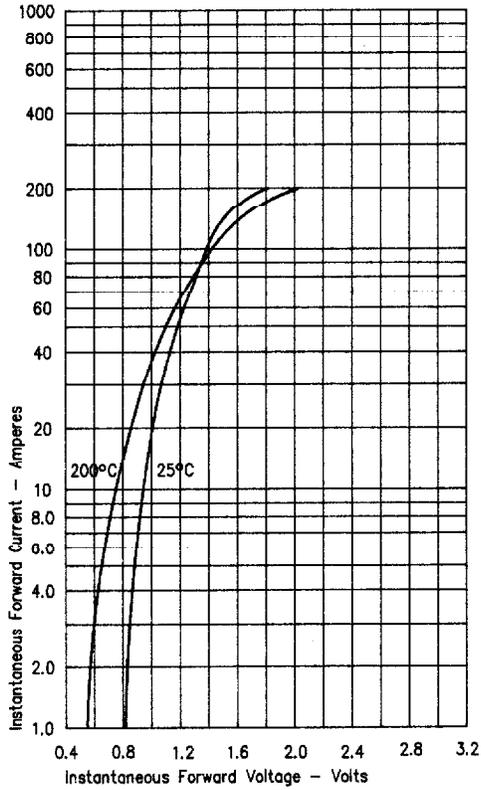


Figure 3
Forward Current Derating

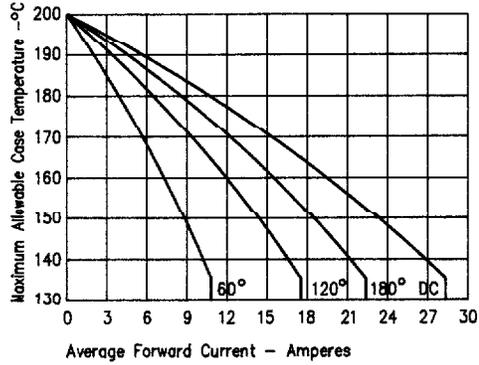


Figure 4
Maximum Forward Power Dissipation

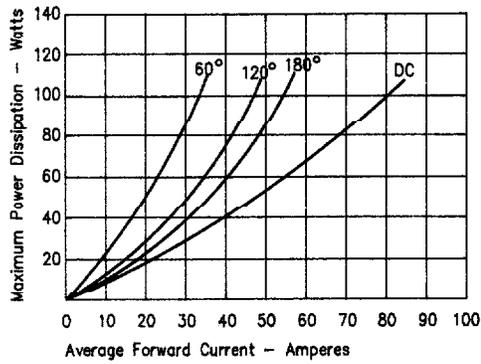


Figure 2
Typical Reverse Characteristics



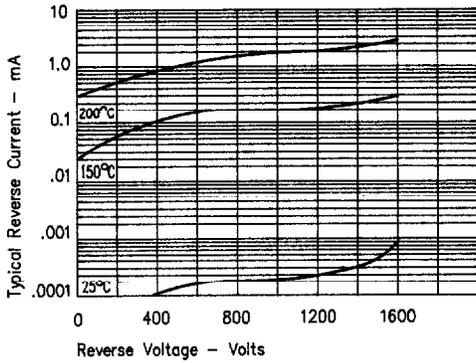


Figure 5
Transient Thermal Impedance

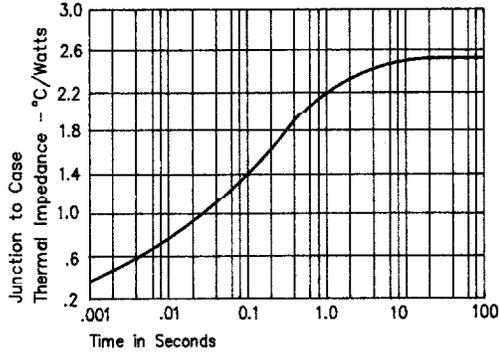

S/R21

|

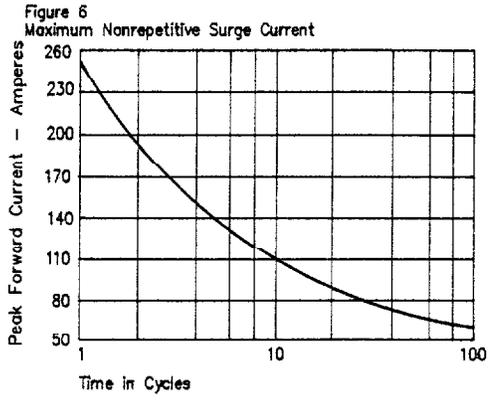

E