

POWER SCHOTTKY RECTIFIERS

50 Amp, 30 and 40 Volts

1N6097
1N6098

2

FEATURES

- Very Low Forward Voltage
- Low Recovered Charge
- Rugged Package Design (DO-5)
- Low Thermal Resistance
- High Surge Current
- Reverse Energy Tested (2A pk)

ABSOLUTE MAXIMUM RATINGS


	1N6097	1N6098
Working Peak Reverse Voltage, V_{RWM}	30V	40V
DC Blocking Voltage, V_R	30V	40V
Repetitive Peak Reverse Voltage, V_{RRM}	30V	40V
Non-repetitive Peak Reverse Voltage, V_{RSM}	36V	48V
Average Rectified Forward Current, I_O	50A ($T_C = 70^\circ\text{C}$) 20A ($T_C = 105^\circ\text{C}$)	800A $-65 \text{ to } 125^\circ\text{C}$
Non-repetitive Peak Surge Current (8.3 mS), I_{FSM}		800A
Storage Temperature Range, T_{STG}		$+150^\circ\text{C}$
Peak Operating Junction Temperature, $T_{J(PK)}$		$+150^\circ\text{C}$
Thermal Resistance Junction to Case, $R_{\theta JC}$		$1^\circ\text{C}/\text{WMax}$

ELECTRICAL CHARACTERISTICS ($T_{CASE} = 25^\circ\text{C}$)

Characteristic	Symbol	Both Types	Units	Conditions
Maximum Instantaneous Reverse Current	I_{RRM}	250	mA	$V_{RWM} = \text{Rated}$, $T_C = 125^\circ\text{C}$ Pulse Width = 300 μs , Duty Cycle ≤ 2 percent
Maximum Reverse Current	I_R	250	mA	$V_R = \text{Rated}$, $T_C = 115^\circ\text{C}$
Maximum Instantaneous Forward Voltage	V_{FM}	0.86	V	$I_O = 50\text{A}^*$ $T_C = 70^\circ\text{C}$
	V_{FM}	0.60	V	$I_F = 10\text{A}$ Pulse Width 300 μs Duty Cycle ≤ 2 percent
Capacitance	C_f	7000	pF	$V_R = 1.0\text{V}$

* $I_{FM} = 157\text{A}$

MECHANICAL SPECIFICATIONS

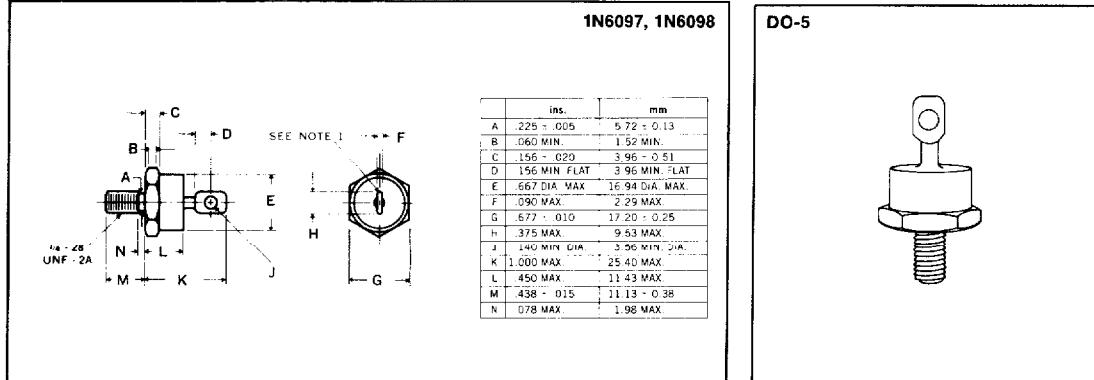

Notes:

1. Cathode is stud.
2. Maximum unlubricated stud torque: 30 inch pounds.
3. Angular orientation of terminal is undefined.
4. Maximum tension (90°) anode terminal 15 pounds for 30 seconds.

Microsemi Corp.
Watertown
The diode experts

