


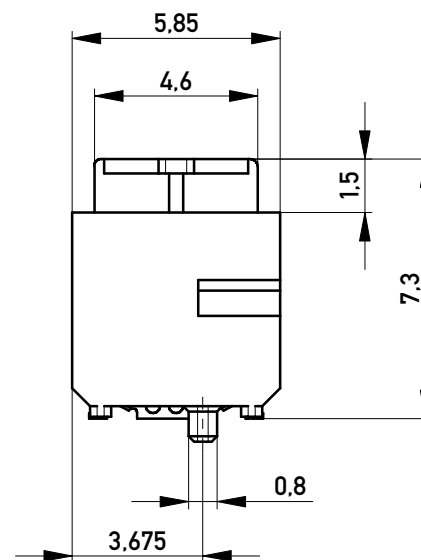
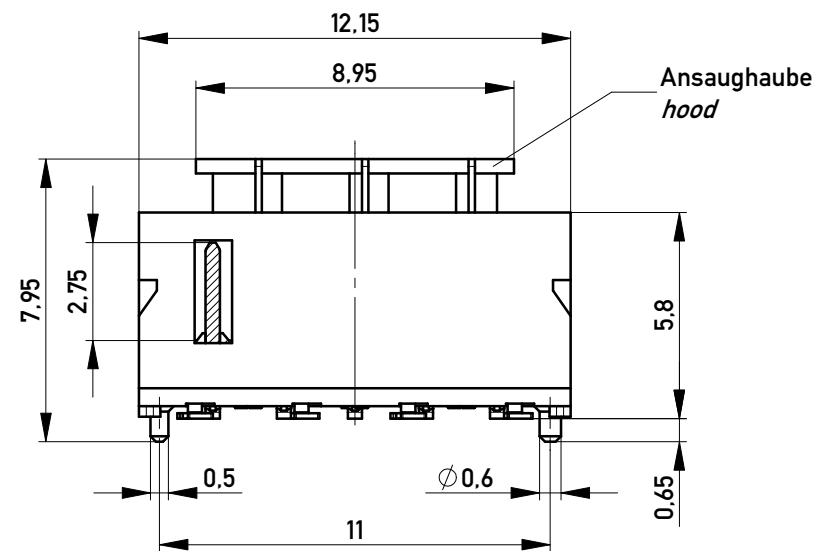
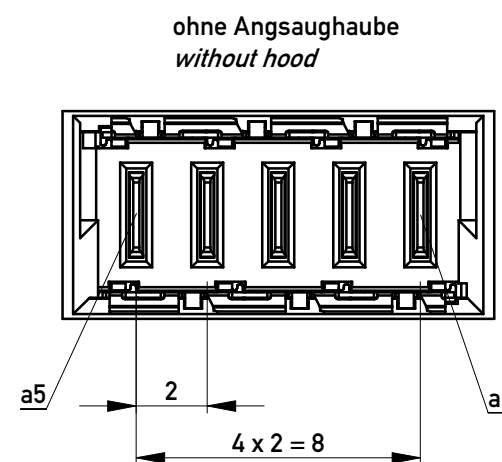


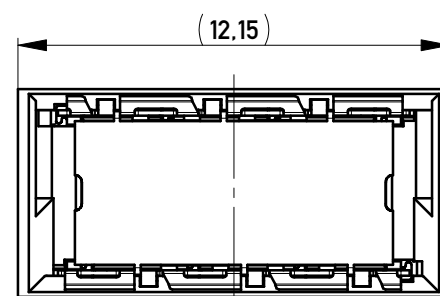


Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 420 Stück
Packaging unit: 420 pcs

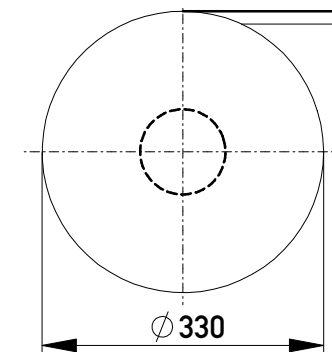

Abspulrichtung - Reel off Direction

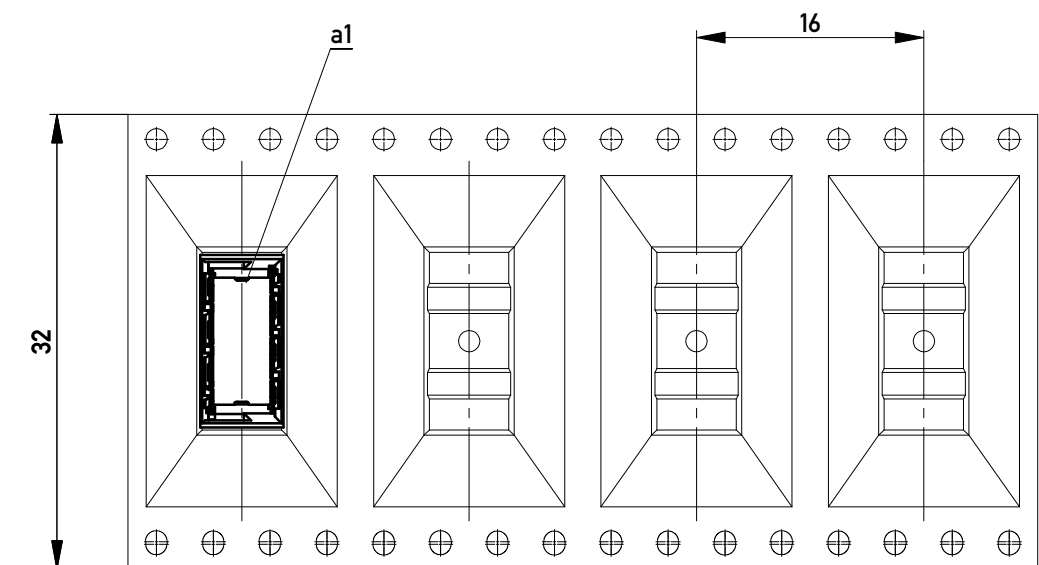

Leiterplatten-Layout Vorschlag / PCB-Layout Proposal

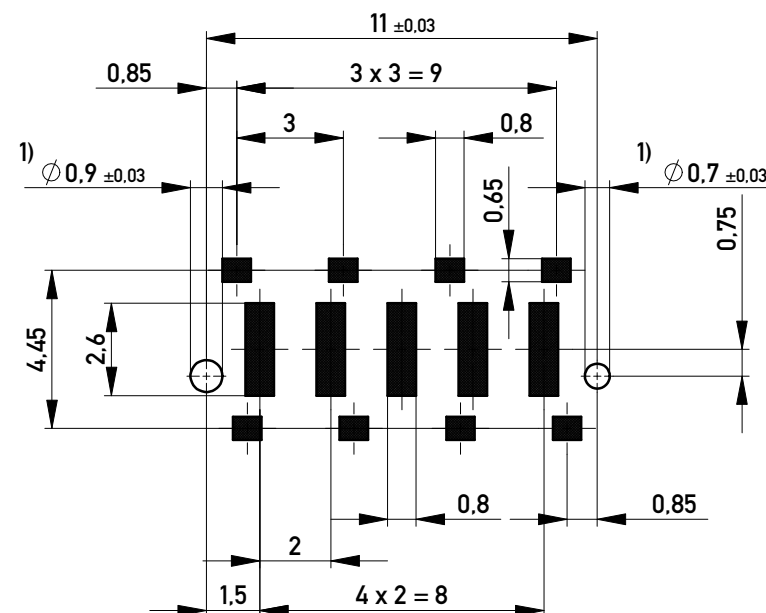

1) $\phi 0.9 \pm 0.03$) Durchmesser des Bohrers / Drill tool


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 μm
Terminal Area 4-6 μm tin plating

Koplanarität der Anschlüsse $\leq 0.1 \text{ mm}$
Coplanarity Area of Termination $\leq 0.1 \text{ mm}$

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 5:1				
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation						
						Messerleiste SMD, Powerm. 2mm <i>Male Con. SMD, Powerm. 2mm</i>						
				k		06.09.2012				www.ERNI.com		100100010001
Index		Date						Class		MSPEED		A3

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.