


● Features:

Output current in excess of 150 mA No external components required Internal short circuit current limiting
Internal thermal overload protection Available in either 5% selections

● Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Input voltage (Ta=25°C)	V _I	35	V
Output current	I _O	0.15	A
Power dissipation (Ta=25°C)	P _D	0.5	W
Ambient temperature	T _{OP}	-40~85	°C
Storage Temperature	T _{STG}	-55~150	°C

Three-terminal fixed output voltage regulator
0.5W、0.15A、5V




Main purposes:

the role of regulator and protection for a variety of electrical appliances, electronic equipment, regulator circuit

● Electrical characteristics (Unless otherwise specified) V_I=10V, I_O=40mA, C_i=0.33μF, C_o=0.1μF

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output voltage	V _O	T _j =25°C	4.75	5	5.25	V
		1mA≤I _O ≤40mA, 7V≤V _I ≤20V	4.65	5	5.35	
Voltage Regulation	S _V	T _j =25°C	7V≤V _I ≤20V	—	—	150
			8V≤V _I ≤20V	—	—	100
Current Regulation	S _I	T _j =25°C, 1mA≤I _O ≤100mA	—	—	60	mV
Quiescent Current	I _Q	T _j =25°C	—	—	6	mA
Quiescent Current Change	△I _Q	1mA≤I _O ≤40mA	—	—	0.1	mA
		8V≤V _I ≤20V	—	—	1.5	
Input - output differential pressure	V _I -V _O	T _j =25°C	—	1.7	—	V
Ripple Rejection Ratio	Srip	T _j =25°C, 8V≤V _I ≤18V, f=120Hz	—	49	—	dB

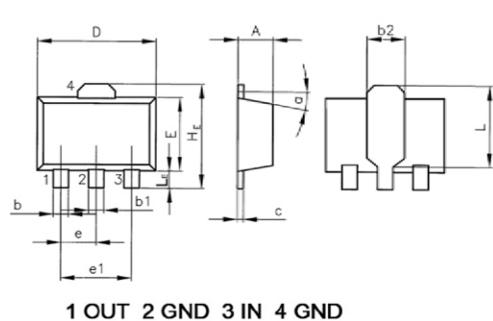SOT-89 Dimensions


Symbol	SOT-89			Symbol	SOT-89		
	min	typ	max		min	typ	max
A		1.5		e		1.5	
b			0.65	e ₁		3	
b ₁			0.65	H _E			4.25
b ₂		1.6		L	2.6		2.95
c	0.25			L _E	0.8		1.2
D		4.5		α			10°
E			2.6				

SK MAKE CONSCIOUS PRODUCT
CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE