

World Wide [Change](#)

[Home](#) [Products](#) [Support](#) [Services](#) [Selectors](#) [How to Buy](#)


[Rack Automatic Transfer Switch](#)

Rack ATS, 16A, 230V, (2)IEC 309 in, (1)IEC 309 out

AP7722
[Contact Sales](#)

[Email Technical Specification](#)

[Printer Friendly](#)

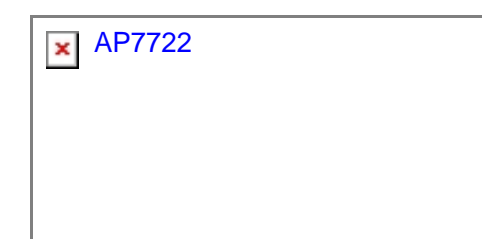

APC Rack Automatic Transfer Switch ,
Input: 230V , Input Connections: IEC 309 16
2P+E , Cord Length: 3 feet (0.91 meters) ,
Output: 230V , Output Connections: IEC 309
(2P+E)

[More Images](#)

IncludesRack Mounting brackets, User Man

Standard Lead TimeUsually in Stock

[Technical Specifications](#) [Product Overview](#) [Documentation](#) [Options](#)

Output

Nominal Output Voltage

230V

Maximum Total Current Draw per Phase

16A

Output Connections

(1) IEC 309 16A (2P+E)

Cord Length

0.91 meters

Input

Nominal Input Voltage

230V

Input Frequency

50/60 Hz

Input Connections

IEC 309 16A 2P+E

Cord Length

0.91 meters

Number of Power Cords

2

Acceptable Input Voltage

200-240 VAC

Maximum Line Current per phase

16A

Maximum Input Current per phase

16A

Load Capacity

3840 VA

Physical

Net Weight

4.64 KG

Maximum Height

44.00 mm

Maximum Width

432.00 mm

Maximum depth

229.00 mm

Shipping Weight

7.14 KG

Shipping Height

70.00 mm

Shipping Width

597.00 mm

Shipping Depth

445.00 mm

Color

Black

Environmental

Operating Environment

0 - 45 °C

Operating Relative Humidity

0 - 95%

Operating Elevation

0-3000 meters

Storage Temperature

-15 - 65 °C

Storage Relative Humidity

0 - 95%

Storage Elevation

0-15000 meters

Conformance

Regulatory Approvals

C-tick,CE,EN 55022 Class A,EN 55024,EN 60950,VDE

Standard Warranty

2 years repair or replace

[Copyright](#) © American Power Conversion Corp., all rights reserved

[About APC](#) [Investors](#) [Job Seeker](#) [Press](#) [Feedback](#) [Contact](#) [Privacy Policy](#)