

5

4




3

2


1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

No. 1 contact

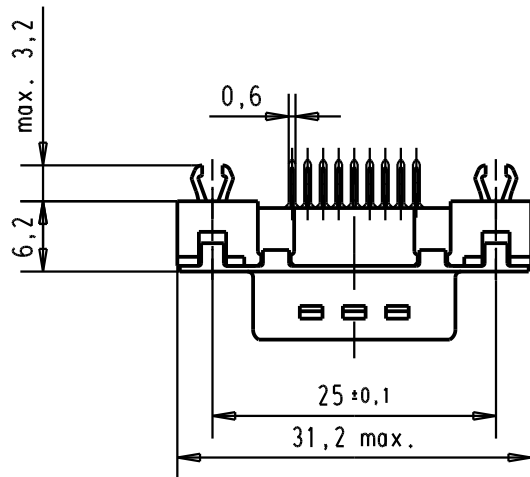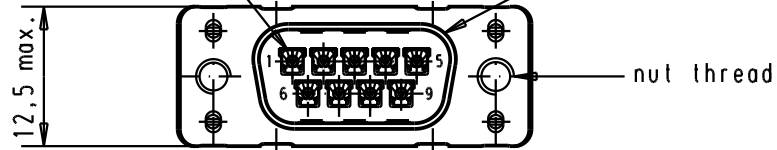

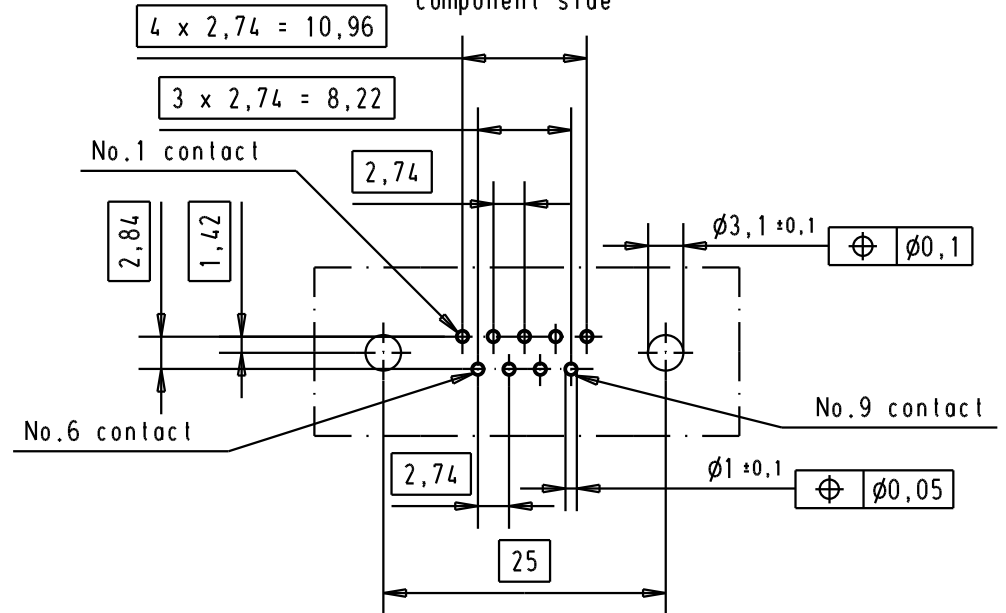

Printed board layout component side



Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

09 65 161 3711	M3	1																
09 65 161 6711	M3	2																
09 65 161 7711	M3	3																
09 65 161 3712	4-40 UNC	1	31892	22/04/04	JH													
09 65 161 6712	4-40 UNC	2	31523	11/07/03	TCP													
09 65 161 7712	4-40 UNC	3	29723	05/03/02	CV													
Part number	Nut thread	Performance level	Mod.	Dat.	Name			D-Sub, 9 poles, male, straight, with solder pins 3,7, nuts and grounding board lock			Moßstab/ Scale							
						HARTING EURL F-95972 Paris		TB 09 65 161 x71x		All Dim. in mm Orig. Size DIN A 4	1,5:1							
								Sub.			Blatt/ Page 1/							