
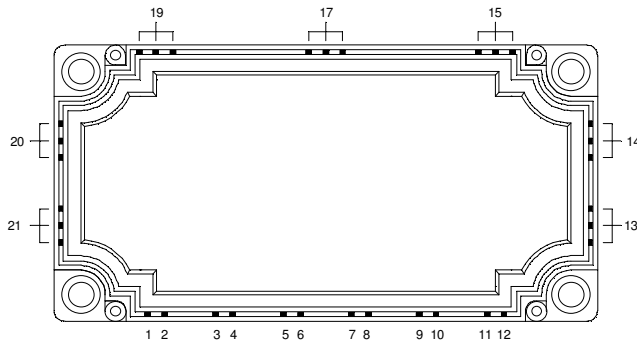


3 Phase bridge NPT IGBT Power Module

$V_{CES} = 1200V$
 $I_C = 50A @ T_c = 80^\circ C$

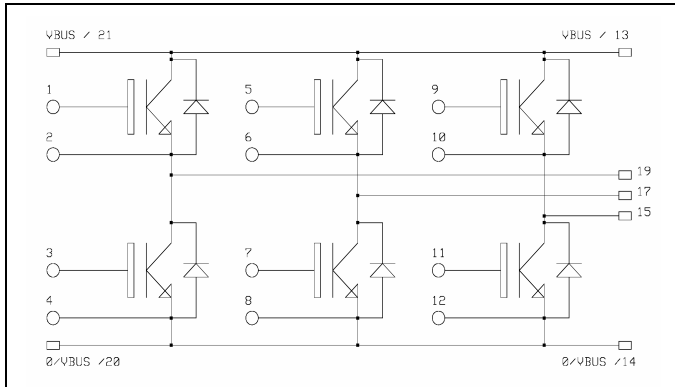

Application

- AC Motor control

Features


- Non Punch Through (NPT) IGBT®
 - Low voltage drop
 - Low tail current
 - Switching frequency up to 20 kHz
 - Soft recovery parallel diodes
 - Low diode VF
 - Low leakage current
 - Avalanche energy rated
 - RBSOA and SCSOA rated
- Kelvin emitter for easy drive
- Very low stray inductance
- High level of integration

Benefits

- Stable temperature behavior
- Very rugged
- Solderable terminals for easy PCB mounting
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Easy paralleling due to positive TC of VCEsat
- Low profile

Absolute maximum ratings

| Symbol | Parameter | Max ratings | Unit |
|-----------|---------------------------------------|---------------------|------------|
| V_{CES} | Collector - Emitter Breakdown Voltage | 1200 | V |
| I_C | Continuous Collector Current | $T_C = 25^\circ C$ | 78 |
| | | $T_C = 80^\circ C$ | 50 |
| I_{CM} | Pulsed Collector Current | $T_C = 25^\circ C$ | 150 |
| V_{GE} | Gate - Emitter Voltage | ± 20 | V |
| P_D | Maximum Power Dissipation | $T_C = 25^\circ C$ | 400 |
| SCSOA | Short Circuit Safe Operating Area | $T_j = 125^\circ C$ | 500A@1200V |

 **CAUTION:** These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

Electrical Characteristics

All ratings @ $T_j = 25^\circ\text{C}$ unless otherwise specified

| Symbol | Characteristic | Test Conditions | Min | Typ | Max | Unit | |
|--------------|---------------------------------------|-----------------------------------|---------------------------|-----|-----|------|---|
| BV_{CES} | Collector - Emitter Breakdown Voltage | $V_{GE} = 0V, I_C = 3mA$ | 1200 | | | V | |
| I_{CES} | Zero Gate Voltage Collector Current | $V_{GE} = 0V$ $V_{CE} = 1200V$ | $T_j = 25^\circ\text{C}$ | 0.8 | 1 | mA | |
| | | | $T_j = 125^\circ\text{C}$ | 4 | | | |
| $V_{CE(on)}$ | Collector Emitter on Voltage | $V_{GE} = 15V$ $I_C = 50A$ | $T_j = 25^\circ\text{C}$ | 2.0 | 2.5 | 3.0 | V |
| | | | $T_j = 125^\circ\text{C}$ | | 3.1 | 3.7 | |
| $V_{GE(th)}$ | Gate Threshold Voltage | $V_{GE} = V_{CE}, I_C = 2mA$ | 4.5 | | 6.5 | V | |
| I_{GES} | Gate - Emitter Leakage Current | $V_{GE} = 20V, V_{CE} = 0V$ | | | 200 | nA | |

Dynamic Characteristics

| Symbol | Characteristic | Test Conditions | Min | Typ | Max | Unit |
|--------------|------------------------------|--|-----|------|-----|------|
| C_{ies} | Input Capacitance | $V_{GE} = 0V$ $V_{CE} = 25V$ $f = 1MHz$ | | 3300 | | pF |
| C_{oes} | Output Capacitance | | | 500 | | |
| C_{res} | Reverse Transfer Capacitance | | | 220 | | |
| $T_{d(on)}$ | Turn-on Delay Time | Inductive Switching (125°C) $V_{GE} = \pm 15V$ $V_{Bus} = 600V$ $I_C = 50A$ $R_G = 22\Omega$ | | 44 | | ns |
| T_r | Rise Time | | | 56 | | |
| $T_{d(off)}$ | Turn-off Delay Time | | | 380 | | |
| T_f | Fall Time | | | 70 | | |


Reverse diode ratings and characteristics

| Symbol | Characteristic | Test Conditions | Min | Typ | Max | Unit | |
|----------|-------------------------|---|---------------------------|-----|-----|------|---------|
| V_F | Diode Forward Voltage | $I_F = 50A$ $V_{GE} = 0V$ | $T_j = 25^\circ\text{C}$ | | 2.3 | 2.8 | V |
| | | | $T_j = 125^\circ\text{C}$ | | 1.8 | | |
| t_{rr} | Reverse Recovery Time | $I_F = 50A$ $V_R = 600V$ $di/dt = 800A/\mu s$ | $T_j = 125^\circ\text{C}$ | 200 | | ns | |
| Q_{rr} | Reverse Recovery Charge | $I_F = 50A$ $V_R = 600V$ $di/dt = 800A/\mu s$ | $T_j = 25^\circ\text{C}$ | | 2.8 | | μC |
| | | | $T_j = 125^\circ\text{C}$ | | 8 | | |

Thermal and package characteristics

| Symbol | Characteristic | Min | Typ | Max | Unit | |
|------------|---|-------------|-----|------|--------------------|-----|
| R_{thJC} | Junction to Case | IGBT | | 0.35 | $^\circ\text{C/W}$ | |
| | | Diode | | 0.7 | | |
| V_{ISOL} | RMS Isolation Voltage, any terminal to case $t = 1$ min, $I_{isol} < 1mA, 50/60Hz$ | 2500 | | | V | |
| T_j | Operating junction temperature range | -40 | | 150 | $^\circ\text{C}$ | |
| T_{STG} | Storage Temperature Range | -40 | | 125 | | |
| T_C | Operating Case Temperature | -40 | | 125 | | |
| Torque | Mounting torque | To Heatsink | M5 | 3 | 4.5 | N.m |
| Wt | Package Weight | | | | 300 | g |

Package outline

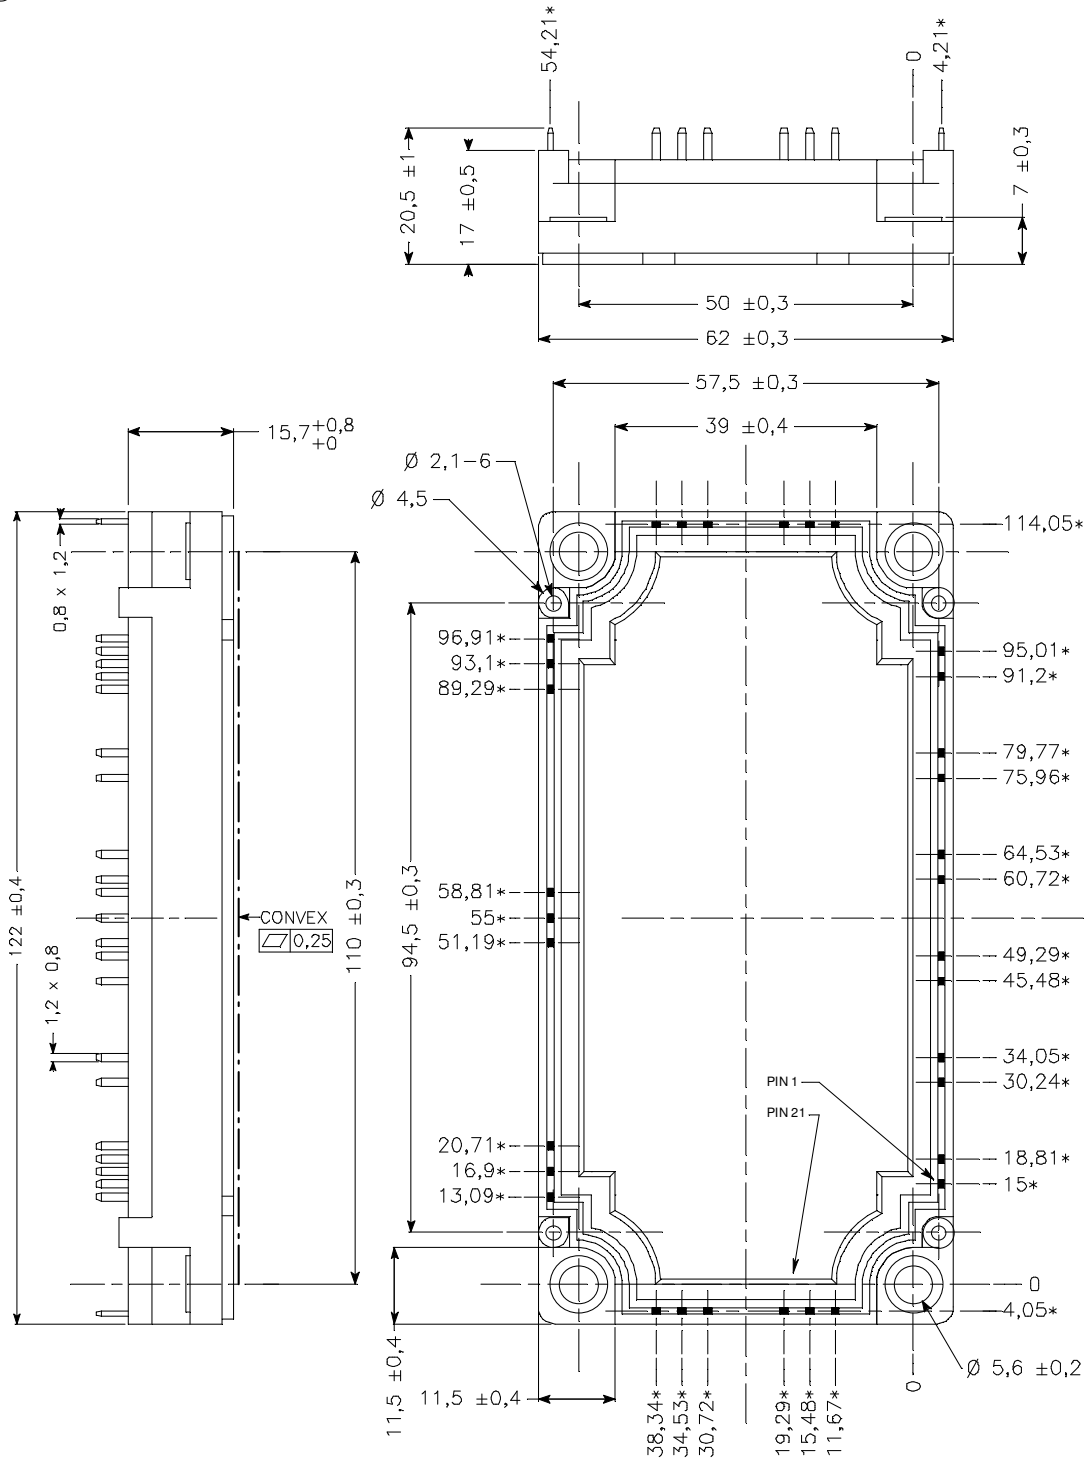

ALL DIMENSIONS MARKED "*" ARE TOLERENCED AS : $\text{Ø}0,4$

APT reserves the right to change, without notice, the specifications and information contained herein

APT's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.