

1

2

3

4

5

6

7

A

A

B

B

C

C

D



D

E

E

F

F

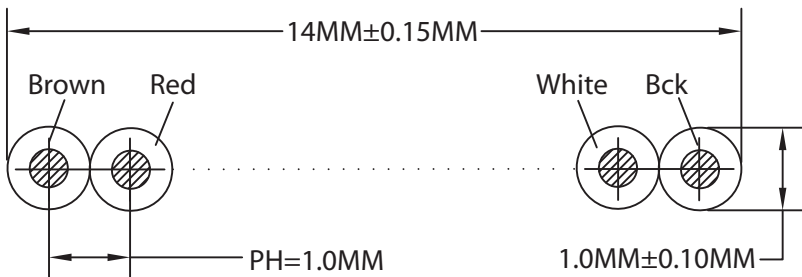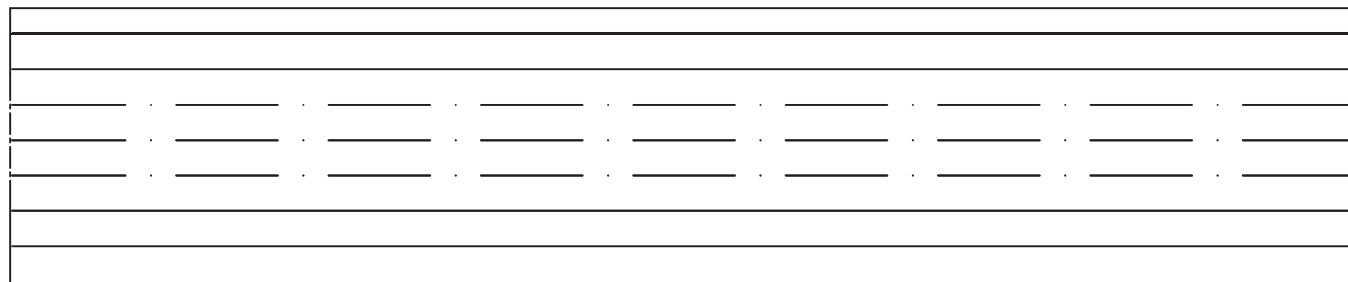

Conductor:

- Style/Size: UL2651 28AWG NPIN
- Material: TC
- Construction: 7/Φ0.125±0.008MM

Jacket:

- Min. Avg. Thick: 0.26MM
- Min. Thick.: 0.18MM
- Material: 35Pa UL-PVC (All the raw material meet VEGA GP standards)
- Color: NP(Brown, Red, Pink, Yellow, Green, Blue, Purple, Grey, White, Black...
... Brown Red, Pink, Yellow, Green, Blue, Purple, Grey, White, Black)
- OD: 1.0MM±0.10MM*50.0MM±0.15MM

Electrical:

- Conductor Resistance: Max. 237.25Ω/Km, 20°C
- Insulation Resistance: Min. 20MΩ/Km, 20°C
- Dielectric Strength: 1,500V AC 1min.
- UL File No. E189529
- UL Style: 2651-VW-1

Unit: MM±0.15MM

Scale	1:1							Name
TOLERANCE					Drawn	10.31.11	Chappell	Item No.
X.X	±0.40				Approved			Title Multi-Color Ribbon Cable - 28AWG, 1.0MM Pitch, 14 Conductors, 300 Feet, 13" Reel
X.XX	±0.25							
X.XXX	±0.15							Drawing No.
Angle	±3°							rev00
								Replace
								Sheet



1

2

3

4

5

6

7

H

H