


## TO-220-3L Plastic-Encapsulate Diodes

### **MBR30100CT SCHOTTKY BARRIER RECTIFIER**

#### **FEATURES**

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications

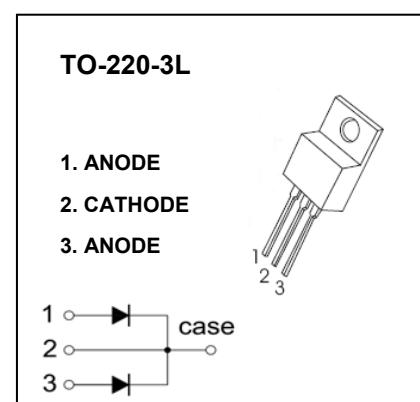

#### **MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ unless otherwise noted )**

Symbol	Parameter	Value	Unit
$V_{RRM}$	Peak repetitive reverse voltage	100	V
$V_{RWM}$	Working peak reverse voltage		
$V_R$	DC blocking voltage		
$V_{R(RMS)}$	RMS reverse voltage	70	V
$I_o$	Average rectified output current	30	A
$I_{FSM}$	Non-Repetitive peak forward surge current 8.3ms half sine wave	350	A
$P_D$	Power dissipation	2	W
$R_{θJA}$	Thermal resistance from junction to ambient	50	°C/W
$T_j$	Junction temperature	125	°C
$T_{stg}$	Storage temperature	-55~+150	°C

#### **ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ unless otherwise specified )**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	$I_R=1\text{mA}$	100			V
Reverse current	$I_R$	$V_R=100\text{V}$			100	$\mu\text{A}$
Forward voltage	$V_{F1}$	$I_F=15\text{A}$			1	V
Forward voltage	$V_{F2^*}$	$I_F=30\text{A}$			1.05	V
Typical total capacitance	$C_{tot}$	$V_R=4\text{V}, f=1\text{MHz}$		300		pF

# Typical Characteristics MBR30100CT

