



SGM2122

Dual, Low Dropout, 250mA LDO Regulators

GENERAL DESCRIPTION

The SGM2122 is a dual, low-power, low-dropout, CMOS linear voltage regulator. It operates from a 2.5V to 5.5V input and delivers up to 250mA at each channel.

The SGM2122 is the perfect choice for low voltage, low power. The ground current is 190µA (both LDO's enabled and active) that makes this part attractive for battery operated power systems. The SGM2122 also offers low dropout voltage (250mV at 250mA output) to prolong battery life in portable electronics.

Separate enable pins control each individual LDO output. The EN function allows the output of each regulator to be turned off independently, resulting in greatly reduced power consumption. Other features include a 10nA logic-controlled shutdown mode, foldback current limit and thermal shutdown protection.

The SGM2122 is available in Green SOT-23-6 package. It operates over an ambient temperature range of -40°C to +85°C.


APPLICATIONS

- Cellular Telephones
- Cordless Telephones
- PCS Telephones
- PCMCIA Cards
- Modems
- MP3 Player
- Hand-Held Instruments
- Palmtop Computers
- Wireless LAN
- Portable/Battery-Powered Equipment

FEATURES


- **Highly Accurate:** ±2%
- **Ultra-Low Dropout Voltage:**
250mV at 250mA Output
- **190µA No-Load Supply Current**
- **Quick Auto-Discharge in Shutdown Status**
- **Thermal-Overload Protection**
- **Output Current Limit**
- **10nA Logic-Controlled Shutdown**
- **Operating Temperature Range:** -40°C to +85°C
- **Small Package**

PIN CONFIGURATION (TOP VIEW)

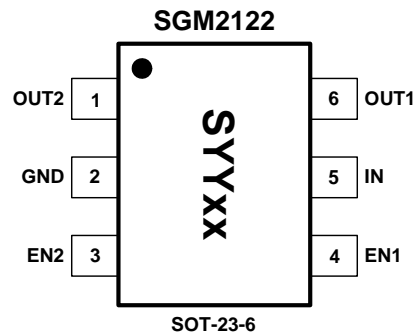

NOTE: The location of pin 1 on the SGM2122 is determined by orienting the package marking as shown.

TYPICAL APPLICATION CIRCUIT

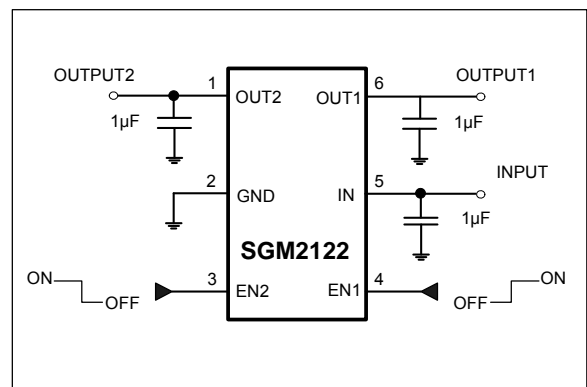


PACKAGE/ORDERING INFORMATION


ORDERING NUMBER	V _{OUT1}	V _{OUT2}	PIN-PACKAGE	SPECIFIED TEMPERATURE RANGE	PACKAGE MARKING	PACKAGE OPTION
SGM2122-AYN6G/TR	2.8V	2.8V	SOT-23-6	-40°C to +85°C	S0CXX	Tape and Reel, 3000
SGM2122-CYN6G/TR	2.8V	3.0V	SOT-23-6	-40°C to +85°C	S0DXX	Tape and Reel, 3000
SGM2122-DYN6G/TR	2.8V	2.5V	SOT-23-6	-40°C to +85°C	S0EXX	Tape and Reel, 3000
SGM2122-EYN6G/TR	2.8V	1.8V	SOT-23-6	-40°C to +85°C	S0FXX	Tape and Reel, 3000
SGM2122-GYN6G/TR	2.5V	1.8V	SOT-23-6	-40°C to +85°C	S10XX	Tape and Reel, 3000
SGM2122-HYN6G/TR	3.3V	2.5V	SOT-23-6	-40°C to +85°C	S11XX	Tape and Reel, 3000
SGM2122-IYN6G/TR	3.3V	1.8V	SOT-23-6	-40°C to +85°C	S12XX	Tape and Reel, 3000
SGM2122-KYN6G/TR	3.0V	1.8V	SOT-23-6	-40°C to +85°C	S13XX	Tape and Reel, 3000
SGM2122-MYN6G/TR	2.8V	1.2V	SOT-23-6	-40°C to +85°C	S14XX	Tape and Reel, 3000
SGM2122-NYN6G/TR	2.8V	1.3V	SOT-23-6	-40°C to +85°C	S15XX	Tape and Reel, 3000
SGM2122-OYN6G/TR	2.8V	1.5V	SOT-23-6	-40°C to +85°C	S16XX	Tape and Reel, 3000
SGM2122-PYN6G/TR	1.5V	2.8V	SOT-23-6	-40°C to +85°C	S17XX	Tape and Reel, 3000
SGM2122-QYN6G/TR	2.5V	1.5V	SOT-23-6	-40°C to +85°C	S18XX	Tape and Reel, 3000
SGM2122-RYN6G/TR	2.5V	2.8V	SOT-23-6	-40°C to +85°C	S19XX	Tape and Reel, 3000
SGM2122-SYN6G/TR	1.3V	2.8V	SOT-23-6	-40°C to +85°C	S1AXX	Tape and Reel, 3000
SGM2122-TYN6G/TR	1.5V	3.3V	SOT-23-6	-40°C to +85°C	S1BXX	Tape and Reel, 3000
SGM2122-UYN6G/TR	3.3V	3.0V	SOT-23-6	-40°C to +85°C	S1CXX	Tape and Reel, 3000
SGM2122-VYN6G/TR	1.8V	3.3V	SOT-23-6	-40°C to +85°C	S1DXX	Tape and Reel, 3000
SGM2122-WYN6G/TR	1.2V	2.8V	SOT-23-6	-40°C to +85°C	S1EXX	Tape and Reel, 3000
SGM2122-XYN6G/TR	3.3V	2.8V	SOT-23-6	-40°C to +85°C	S28XX	Tape and Reel, 3000
SGM2122-YYN6G/TR	1.8V	2.8V	SOT-23-6	-40°C to +85°C	S29XX	Tape and Reel, 3000
SGM2122-ABYN6G/TR	1.8V	1.2V	SOT-23-6	-40°C to +85°C	S42XX	Tape and Reel, 3000

NOTE: Order number and package marking are defined as the follow:

ORDER NUMBER

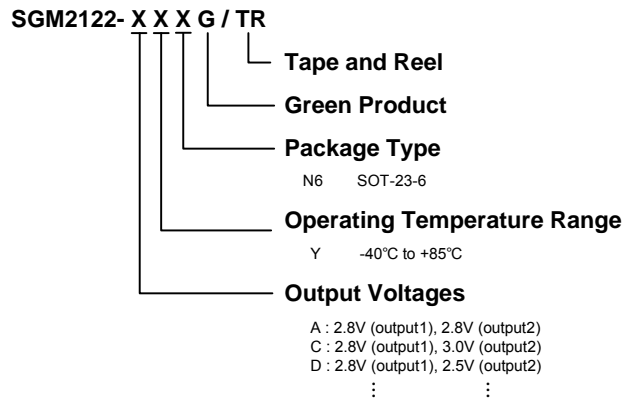

MARKING INFORMATION

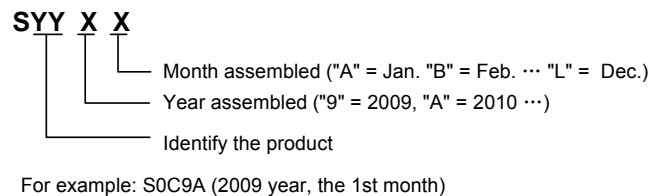

ABSOLUTE MAXIMUM RATINGS

IN to GND.....	-0.3V to 6V	Operating Temperature Range.....	-40°C to +85°C
Output Short-Circuit Duration	Infinite	Junction Temperature.....	150°C
EN to GND.....	-0.3V to V _{IN}	Storage Temperature Range.....	-65°C to +150°C
OUT to GND.....	-0.3V to (V _{IN} + 0.3V)	Lead Temperature (soldering, 10s).....	260°C
Power Dissipation, P _D @ T _A = 25°C		ESD Susceptibility	
SOT-23-6	0.4W	HBM.....	4000V
Package Thermal Resistance		MM.....	400V
SOT-23-6, θ _{JA}	310°C/W		

NOTE:

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

CAUTION

This integrated circuit can be damaged by ESD if you don’t pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

SGMICRO reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. Please contact SGMICRO sales office to get the latest datasheet.

PIN DESCRIPTION

PIN	NAME	FUNCTION
1	OUT2	Channel2 Output Voltage.
2	GND	Common Ground.
3	EN2	On/Off Control 2. A logic low reduces the supply current to 10nA.
4	EN1	On/Off Control 1. A logic low reduces the supply current to 10nA.
5	IN	Supply Input.
6	OUT1	Channel1 Output Voltage.

NOTE: If EN1 and EN2 are both low, both regulators and the reference turn off.

ELECTRICAL CHARACTERISTICS

($V_{IN} = V_{OUT(NOMINAL)} + 0.5V$ or $2.5V$ (whichever is greater), $T_A = -40^{\circ}C$ to $+85^{\circ}C$. Typical values are at $T_A = +25^{\circ}C$, for each LDO unless otherwise specified.)







PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage	V_{IN}		2.5		5.5	V
Output Voltage Accuracy		$I_{OUT} = 0.1mA$, $T_A = +25^{\circ}C$	-2		+2	%
Maximum Output Current ⁽³⁾			250			mA
Current Limit	I_{LIM}		310	500		mA
Ground Pin Current	I_Q	$EN = V_{IN}$, both LDOs No Load		190	295	μA
Dropout Voltage ⁽¹⁾		$I_{OUT} = 1mA$		1		mV
		$I_{OUT} = 250mA$		250	350	
Line Regulation	ΔV_{LNR}	$V_{IN} = 2.5V$ or $(V_{OUT} + 0.5V)$ to $5.5V$, $I_{OUT} = 1mA$		0.02	0.15	%/V
Load Regulation	ΔV_{LDR}	$I_{OUT} = 0.1mA$ to $250mA$, $C_{OUT} = 1\mu F$		0.004	0.01	%/mA
Power Supply Rejection Rate	PSRR	$I_{LOAD} = 50mA$, $C_{OUT} = 1\mu F$ $f = 100Hz$		71		dB
SHUTDOWN						
EN Input Threshold	V_{IH}	$V_{IN} = 2.5V$ to $5.5V$	2.0		0.4	V
	V_{IL}					
EN Input Bias Current	$I_{B(SHDN)}$	$EN = 0V$ and $EN = 5.5V$	$T_A = +25^{\circ}C$	0.01	1	μA
			$T_A = +85^{\circ}C$	0.01		
Shutdown Supply Current	$I_{Q(SHDN)}$	$EN1 = EN2 = 0.4V$	$T_A = +25^{\circ}C$	0.01	1	μA
			$T_A = +85^{\circ}C$	0.01		
Shutdown Exit Delay ⁽²⁾		$C_{OUT} = 1\mu F$, No load	$T_A = +25^{\circ}C$	20		μs
THERMAL PROTECTION						
Thermal Shutdown Temperature	T_{SHDN}			155		$^{\circ}C$
Thermal Shutdown Hysteresis	ΔT_{SHDN}			20		$^{\circ}C$

NOTES:

- The dropout voltage is defined as $V_{IN} - V_{OUT}$, when V_{OUT} is 100mV below the value of V_{OUT} for $V_{IN} = V_{OUT} + 0.5V$. (Only applicable for $V_{OUT} = +2.5V$ to $+3.3V$)
- Time needed for V_{OUT} to reach 95% of final value.
- Each channel provides 300mA of maximum output current when the condition of dissipating heat is good.

TYPICAL OPERATING CHARACTERISTICS


$V_{IN} = V_{OUT(NOMINAL)} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

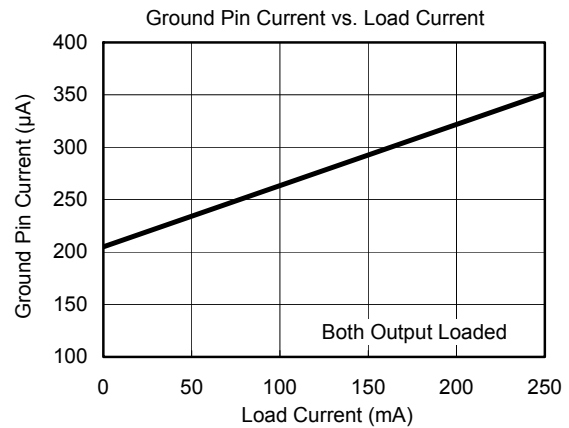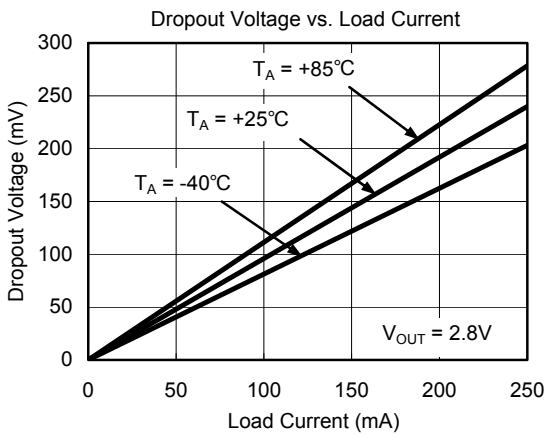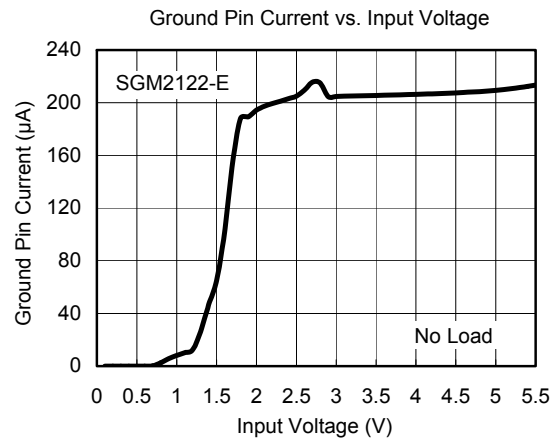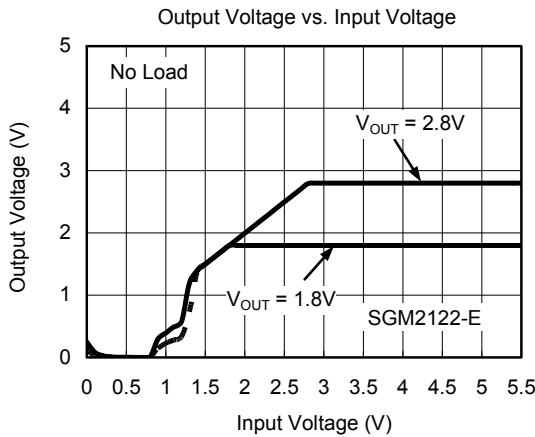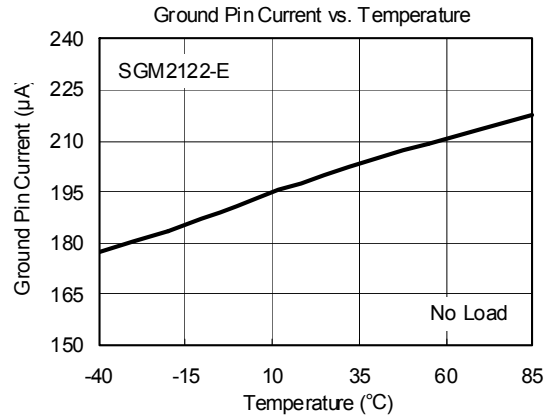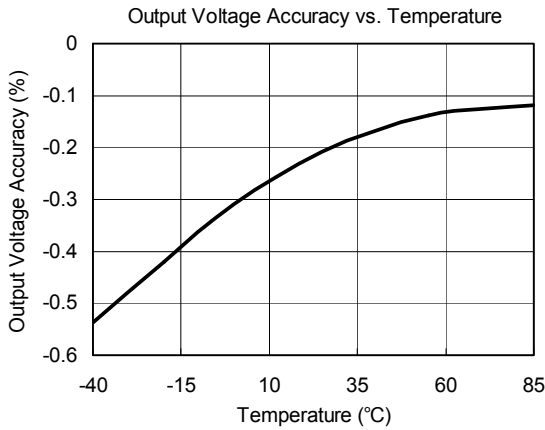


TYPICAL OPERATING CHARACTERISTICS

$V_{IN} = V_{OUT(NOMINAL)} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $T_A = +25^\circ C$, unless otherwise noted.


Power-Supply Rejection Ratio vs. Frequency

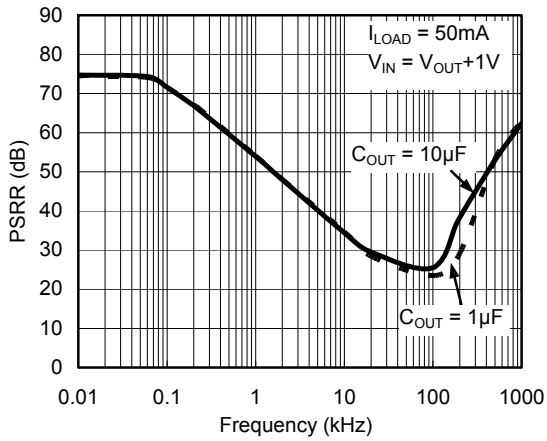


Load-Transient Response

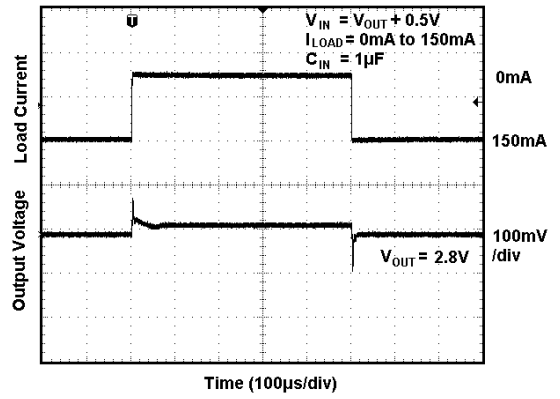


Line-Transient Response

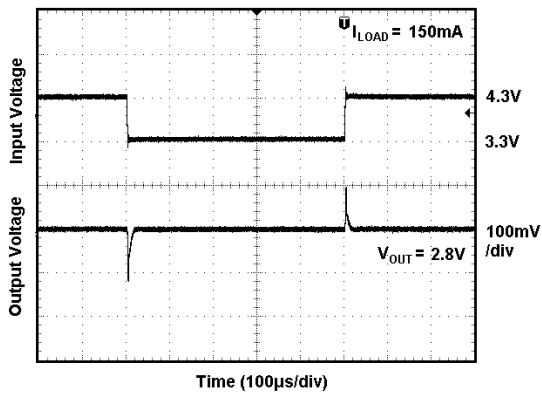


Shutdown Exit Delay

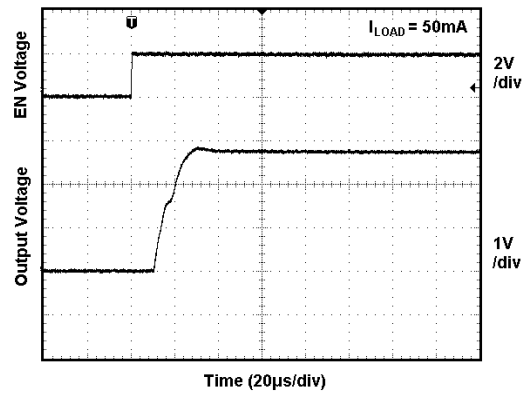

Entering Shutdown

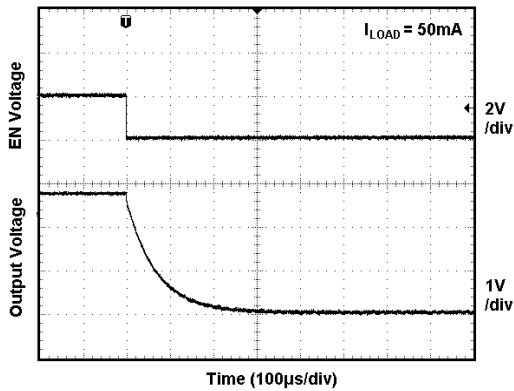


Output Noise 10Hz to 100kHz

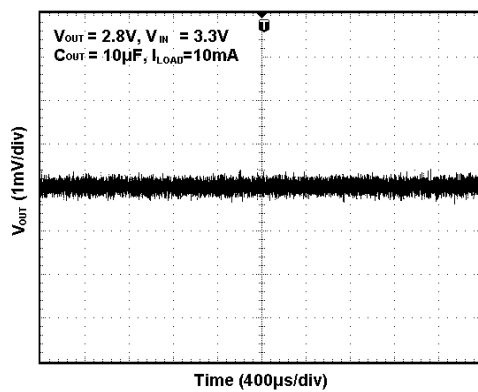


TYPICAL OPERATING CHARACTERISTICS

$V_{IN} = V_{OUT (NOMINAL)} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

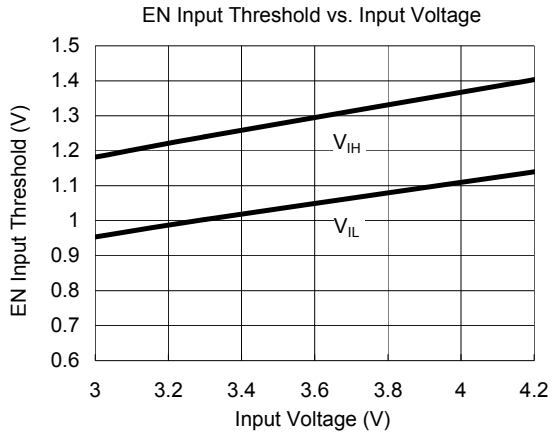


APPLICATION NOTE

When LDO is used in handheld products, attention must be paid to voltage spikes which could damage SGM2122. In such applications, voltage spikes will be generated at charger interface and V_{BUS} pin of USB interface when charger adapters and USB equipments are hot-plugged. Besides this, handheld products will be tested on the production line without battery. Test engineer will apply power from the connector pin which connects with positive pole of the battery. When external power supply is turned on suddenly, the voltage spikes will be generated at the battery connector. The voltage spikes will be very high, and it always exceeds the absolute maximum input voltage (6.0V) of LDO. In order to get robust design, design engineer needs to clear up this voltage spike. Zener diode is a cheap and effective solution to eliminate such voltage spike. For example, BZM55B5V6 is a 5.6V small package Zener diode which can be used to remove voltage spikes in cell phone designs. The schematic is shown below.

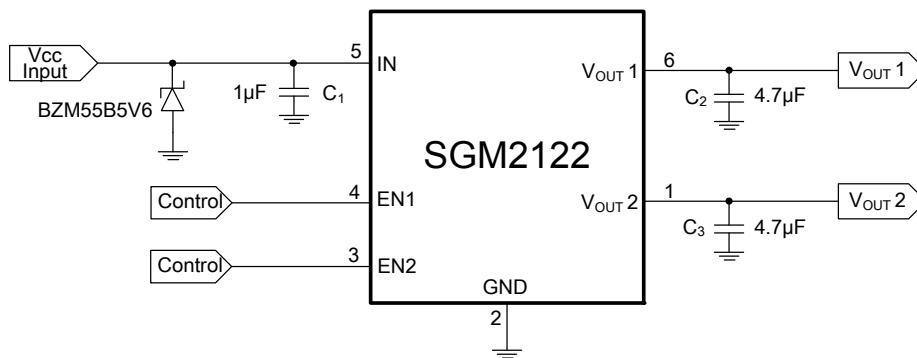

PACKAGE OUTLINE DIMENSIONS


SOT-23-6

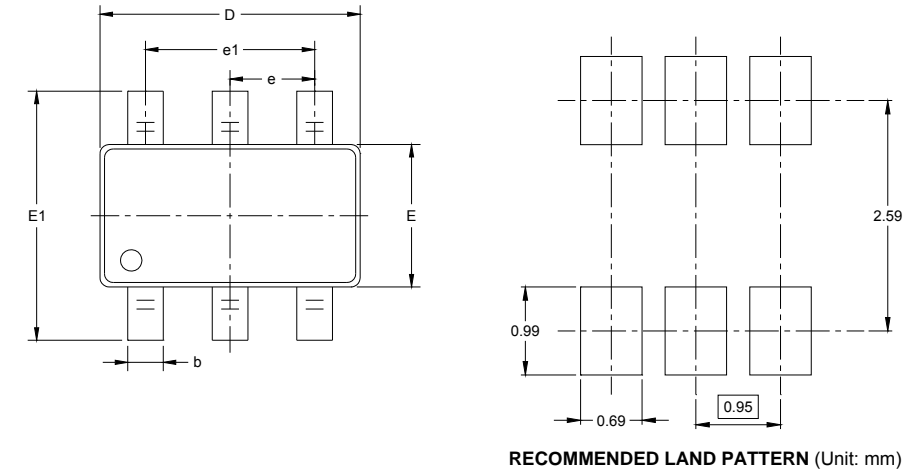


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

TAPE AND REEL INFORMATION

REEL DIMENSIONS

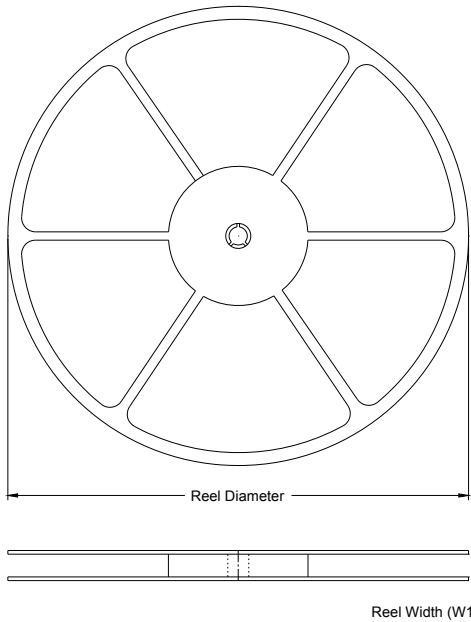


TAPE DIMENSIONS

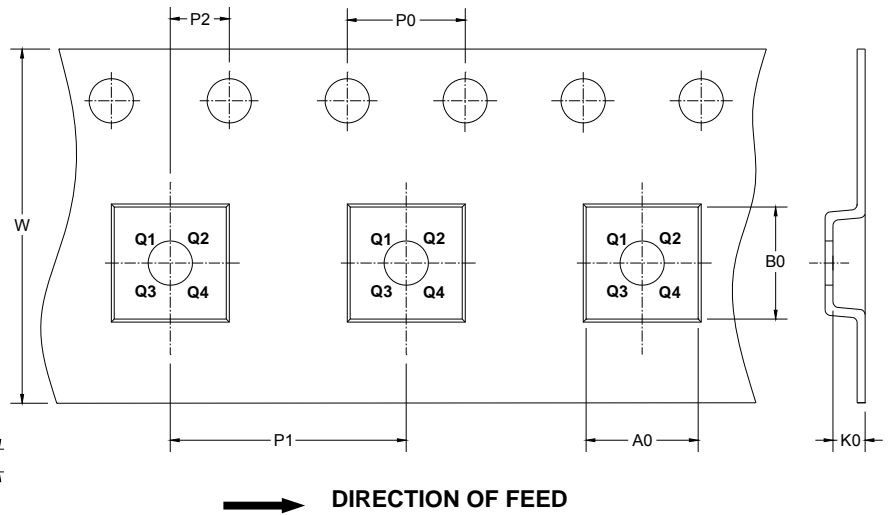

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-6	7"	9.5	3.17	3.23	1.37	4.0	4.0	2.0	8.0	Q3

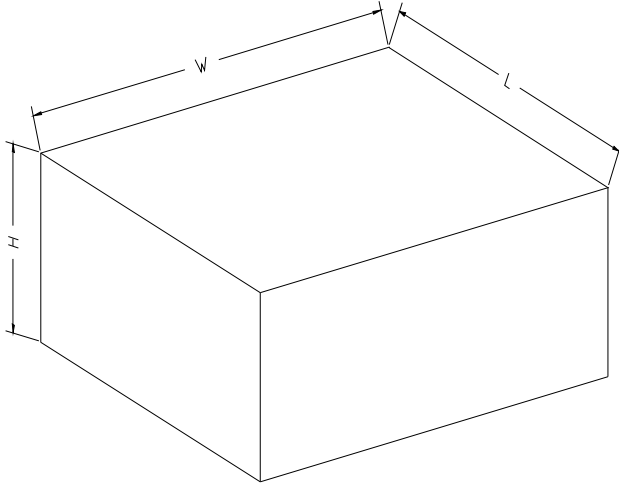CARTON BOX DIMENSIONS

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18