

# MORNSUN®

## LH10-10B05-RU 10W, AC-DC CONVERTER

LH10-10B05-RU---- a compact size power converter offered by Mornsun. It features universal input voltage, taking both DC and AC input voltage, low power consumption, high efficiency, high reliability, safer isolation. It offers good EMC performance, and widely used in industrial, office and civil applications. For harsh EMC environment, this series of products must use the referred application circuit.




RoHS

### FEATURES

1. Universal Input :85 ~ 264VAC,50/60Hz
2. Regulated output, low ripple and noise
3. Over-current, short circuit and over-voltage protection
4. Three years warranty
5. Mounting:PCB mounting
6. Ultrathin height

### PART NUMBER SYSTEM

LH10-10B05-RU

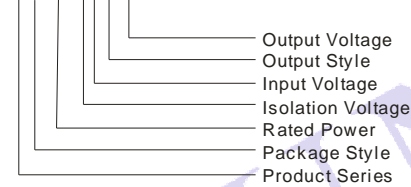

### SELECTION GUIDE

Model	Power	Output (Vo/Io)	Max. Capacitive Load (μF)	Ripple and Noise (Max.)	Efficiency (230VAC, Typ.)	Standby Power Consumption (Max.)
LH10-10B05-RU	10W	5V/2000mA	9000	100mV	76	0.5W

### INPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC Input	85	--	264	V
	DC Input	120	--	370	
Input Frequency		47	--	63	Hz
Input Current	110VAC	--	--	0.26	A
	230VAC	--	--	0.16	
Inrush Current	110VAC	--	10	--	
	230VAC	--	20	--	

### OUTPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		--	±2	--	%
Line Regulation		--	±0.5	--	
Load Regulation		--	±1	--	
Ripple & Noise(p-p)	20MHz bandwidth	--	50	100	mV
Min. Load		0	--	--	%
Hold-up Time	110VAC	--	16	--	ms
	230VAC	--	80	--	
Over Current Protection			≥110		%
Over Voltage Protection		--	--	7.5	V
Short Circuit Protection		Continuous, and auto recovery			

### COMMON SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Operating Temperature		-40	--	+70	°C
Storage Temperature		-40	--	+105	
Max. Case Temperature		--	--	90	
Storage Humidity		--	--	95	%RH


Temperature coefficient		--	--	0.02	
Power derating	-40°C~-10°C	2	--	--	%/°C
	+55°C~+70°C	3.75	--	--	
Isolation Resistance		100	--	--	MΩ
Isolation Voltage	Input-Output	Tested for 1 minute	3000	--	VAC
Switching Frequency		--	65	--	kHz
Weight		--	73	--	g
Safety Class		CLASS I			
Safety standards		UL60950/EN60950/IEC60950			
Hot swap		Forbid			
Case Material Grade		UL 94V-0			
Install		PCB			
Cooling		Free air convection			
MTBF		>300,000 h @ 25°C			

Note: 1. Ripple and Noise were measured by the method of parallel lines measure;  
2. All date in the datasheet are measured according to nominal input voltage, rated output load, TA=25°C, humidity<75%, unless otherwise specified;  
3. All characteristics are for listed model only, non-standard models may perform differently, please contact our technical person for more detail.


### EMC SPECIFICATIONS

EMI	CE	CISPR22/EN55022, CLASS B(without external circuit )		
	RE	CISPR22/EN55022, CLASS B(without external circuit )		
EMS	ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (without external circuit )	perf. Criteria B
		IEC/EN61000-4-4	±4KV (Recommended Circuit Refer to Figure 3)	perf. Criteria B
	Surge	IEC/EN61000-4-5	±1KV/±2KV (without external circuit )	perf. Criteria B
IEC/EN61000-4-5		±2KV/±4KV (Recommended Circuit Refer to Figure 3)		


### PARALLEL LINES MEASURE


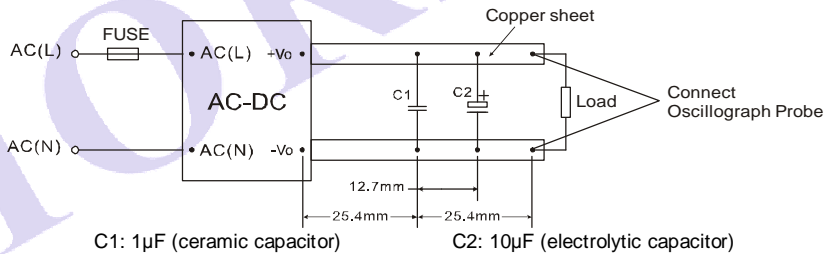


### PRODUCT TYPICAL CURVE

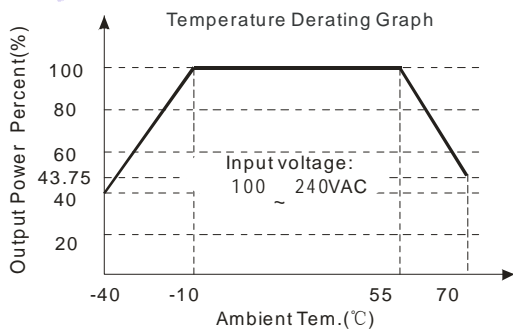


Note: When input 85~100VAC/240~264VAC, it need to be voltage derated on basis of temperature derating.

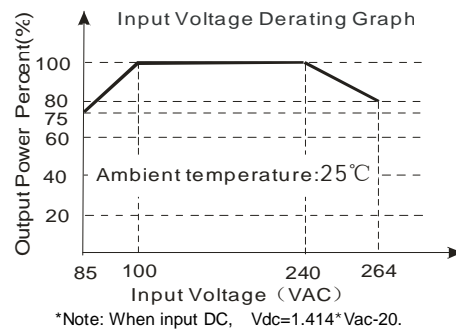


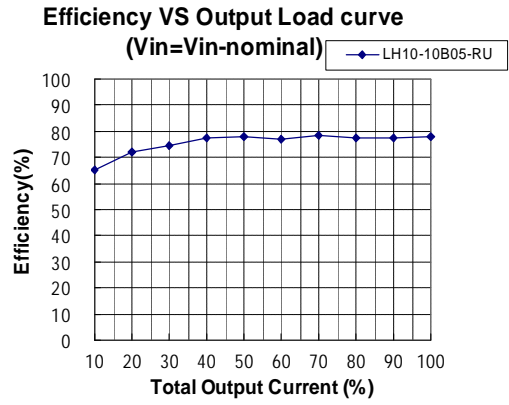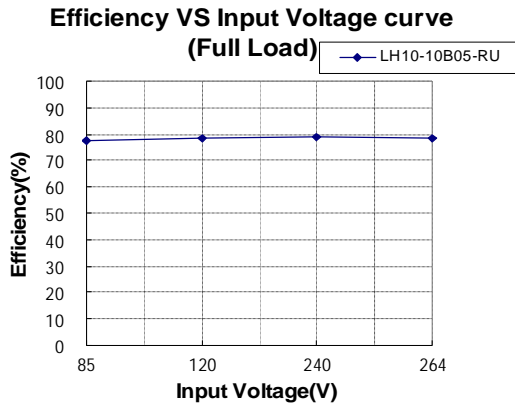

## TYPICAL APPLICATIONS

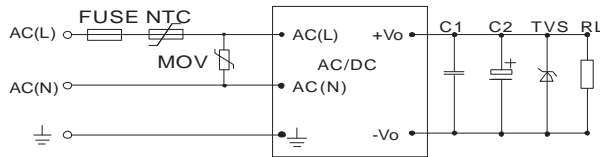


(Figure 1): LH10-10B05-RU Typical application circuit

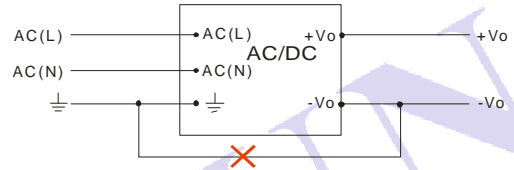


(Figure 2): This application is not available for this series.  
Note: If you have such application, please consult to our FAE department.

## EMC RECOMMENDED CIRCUIT

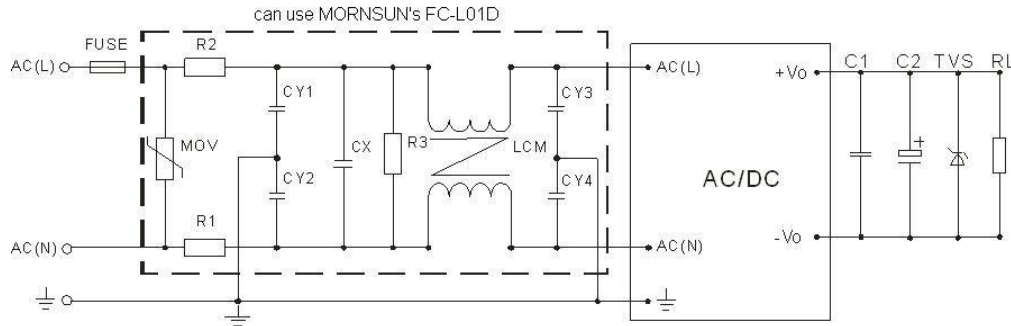

(Figure 3): Recommended circuit for applications which require higher EMC standard (external circuit output is the same as figure 1)

## EMC RECOMMENDED CIRCUIT PCB LAYOUT

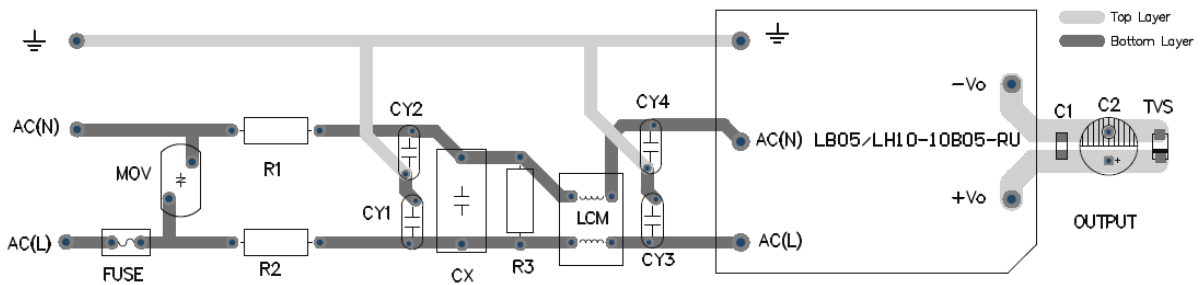

(figure 4): EMC application circuit PCB layout  
Safety and recommend wiring: line-width  $\geq 3\text{mm}$ , line-line distance  $\geq 6\text{mm}$ , line-ground distance  $\geq 6\text{mm}$


EXTERNAL CIRCUIT PARAMETERS			
Model	C1	C2	TVS
LH10-10B05-RU	1 $\mu\text{F}$	330 $\mu\text{F}$	SMBJ7.0A

Note:

1. Output filtering capacitors C2 is electrolytic capacitors, It is recommended to use high frequency and low impedance electrolytic capacitors. For capacitance and current of capacitor please refer to manufacture's datasheet. Voltage derating of capacitor should be 80% or above. C1 is use to filter high frequency noise. TVS is recommended component to protect post-circuits (if converter fails).
2. For standard EMC requirement, please refer to figure 1.If higher EMC requirement ,please refer to figure 3, recommended parameters are shown in the table below.

Components	Recommend Parameter For Higher EMC Standard Circuit
MOV	S14K350
CY1, CY2, CY3, CY4	1nF/400VAC
CX	0.22μF/275VAC
R1, R2	2Ω/3W Winding resistor
R3	1MΩ/2W
LCM	10mH, recommended to use MORNSUN's FL2D-Z5-103
NTC	5D-9
FC-L01D	2KV/4KV Surge protector
FUSE	2A/250V, slow blow, it must be connected to FUSE

## OUTLINE DIMENSIONS,RECOMMENDED FOOTPRINT&PACKAGING

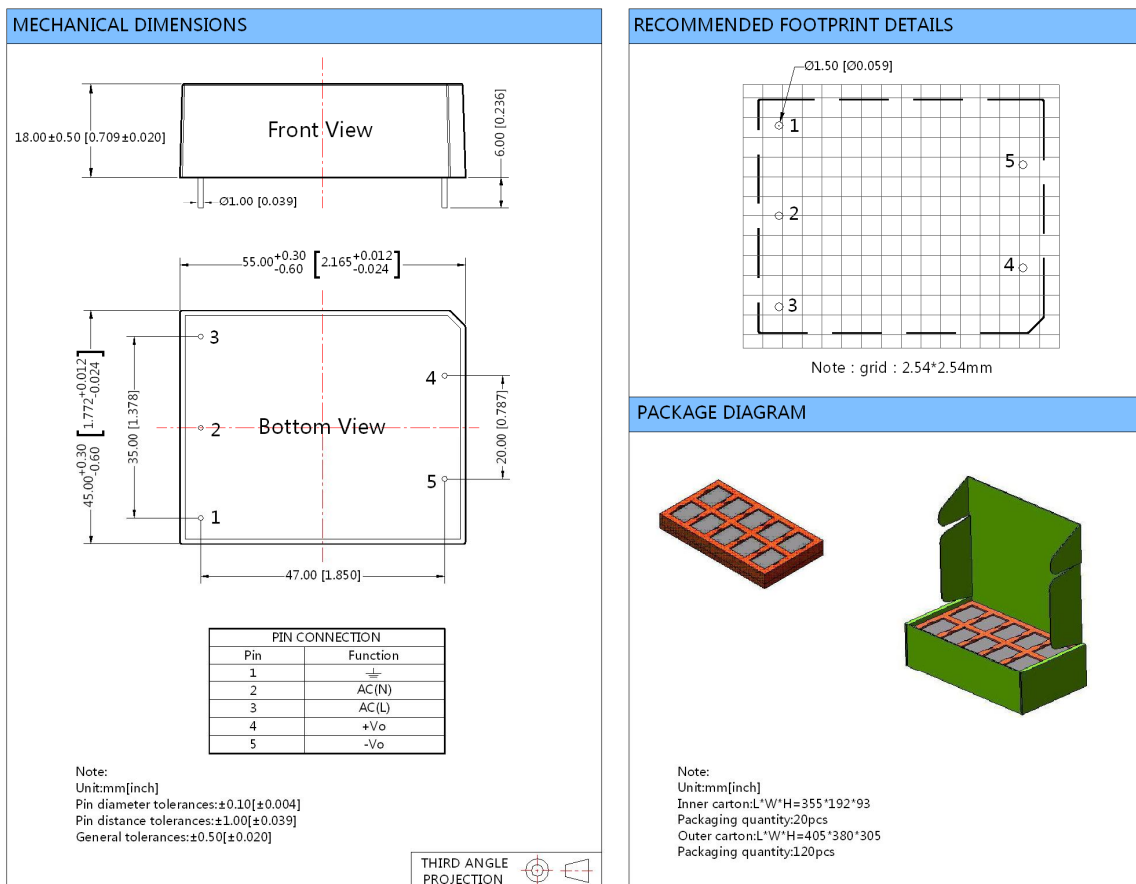

Note: Because without lower cover, the undersurface of product may be not smooth and flat, and may have other un-beautiful phenomenon. But this does not affect the normal performance and reliability of products.

### MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou,P.R.China.

Tel: 86-20-38601850

Fax:86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[Http://www.mornsun-power.com](http://www.mornsun-power.com)