

Outgassing Compliant Chip Inductors AS336RAA

The AS336RAA inductors provide exceptional Q values, even at high frequencies. They have a ceramic body and wire wound construction to provide the highest SRFs available in 0805 size.

This robust version of Coilcraft's standard 0805CS series features high temperature materials that pass NASA low outgassing specifications and allow operation in ambient temperatures up to 155°C. The leach-resistant base metalization with tin-lead (Sn-Pb) terminations ensures the best possible board adhesion.

Part number ¹	Inductance ² (nH)	Percent tolerance	Q min ³	SRF min ⁴ (MHz)	DCR max ⁵ (Ohms)	I _{max} (mA)
AS336RAA020JSZ	2.8 @ 250 MHz	5	57 @ 1000 MHz	>5000	0.06	800
AS336RAA3N0JSZ	3.0 @ 250 MHz	5	61 @ 1000 MHz	>5000	0.06	800
AS336RAA030JSZ	3.3 @ 250 MHz	5	48 @ 1000 MHz	>5000	0.08	600
AS336RAA050JSZ	5.6 @ 250 MHz	5	75 @ 1000 MHz	4760	0.08	600
AS336RAA060JSZ	6.8 @ 250 MHz	5	54 @ 1000 MHz	4440	0.11	600
AS336RAA070JSZ	7.5 @ 250 MHz	5	56 @ 1000 MHz	3840	0.14	600
AS336RAA080_SZ	8.2 @ 250 MHz	5,2	63 @ 1000 MHz	3560	0.12	600
AS336RAA100_SZ	10 @ 250 MHz	5,2	57 @ 500 MHz	3460	0.10	600
AS336RAA120_SZ	12 @ 250 MHz	5,2	46 @ 500 MHz	3180	0.15	600
AS336RAA150_SZ	15 @ 250 MHz	5,2	41 @ 500 MHz	2560	0.17	600
AS336RAA180_SZ	18 @ 250 MHz	5,2	48 @ 500 MHz	2480	0.20	600
AS336RAA220_SZ	22 @ 250 MHz	5,2	59 @ 500 MHz	2080	0.22	500
AS336RAA240_SZ	24 @ 250 MHz	5,2	59 @ 500 MHz	1920	0.22	500
AS336RAA270_SZ	27 @ 250 MHz	5,2	56 @ 500 MHz	2060	0.25	500
AS336RAA330_SZ	33 @ 250 MHz	5,2,1	64 @ 500 MHz	1720	0.27	500
AS336RAA360_SZ	36 @ 250 MHz	5,2,1	57 @ 500 MHz	1520	0.27	500
AS336RAA390_SZ	39 @ 250 MHz	5,2,1	44 @ 250 MHz	1600	0.29	500
AS336RAA430_SZ	43 @ 200 MHz	5,2,1	45 @ 250 MHz	1440	0.34	500
AS336RAA470_SZ	47 @ 200 MHz	5,2,1	44 @ 250 MHz	1360	0.31	500
AS336RAA560_SZ	56 @ 200 MHz	5,2,1	49 @ 250 MHz	1280	0.34	500
AS336RAA680_SZ	68 @ 200 MHz	5,2,1	52 @ 250 MHz	1200	0.38	500
AS336RAA820_SZ	82 @ 150 MHz	5,2,1	51 @ 250 MHz	1060	0.42	400
AS336RAA910_SZ	91 @ 150 MHz	5,2,1	49 @ 250 MHz	1060	0.48	400
AS336RAA101_SZ	100 @ 150 MHz	5,2,1	54 @ 250 MHz	1000	0.46	400
AS336RAA111_SZ	110 @ 150 MHz	5,2	38 @ 250 MHz	880	0.48	400
AS336RAA121_SZ	120 @ 150 MHz	5,2,1	52 @ 250 MHz	880	0.51	400
AS336RAA151_SZ	150 @ 100 MHz	5,2,1	33 @ 100 MHz	730	0.56	400
AS336RAA181_SZ	180 @ 100 MHz	5,2,1	37 @ 100 MHz	730	0.64	400
AS336RAA221_SZ	220 @ 100 MHz	5,2	36 @ 100 MHz	650	0.70	400
AS336RAA241_SZ	240 @ 100 MHz	5,2	36 @ 100 MHz	610	1.00	350
AS336RAA271_SZ	270 @ 100 MHz	5,2	36 @ 100 MHz	580	1.00	350
AS336RAA331_SZ	330 @ 100 MHz	5,2	36 @ 100 MHz	520	1.40	310
AS336RAA391_SZ	390 @ 100 MHz	5,2	34 @ 100 MHz	480	1.50	290
AS336RAA471_SZ	470 @ 50 MHz	5,2,1	24 @ 50 MHz	300	1.76	320
AS336RAA561_SZ	560 @ 25 MHz	5,2	21 @ 50 MHz	260	1.90	310
AS336RAA681_SZ	680 @ 25 MHz	5,2	21 @ 50 MHz	220	2.20	220
AS336RAA821_SZ	820 @ 25 MHz	5,2	23 @ 50 MHz	240	2.35	200

1. When ordering, please specify **tolerance** and **testing** codes:

AS336RAA821GSZ

Tolerance: F = 1% G = 2% J = 5%

Testing: Z = COTS

H = Screening per Coilcraft CP-SA-10001

N = Screening per Coilcraft CP-SA-10003

2. Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286 impedance analyzer or equivalent with Coilcraft-provided correlation pieces.

3. Q measured at the same frequency as inductance using an Agilent/HP 4291A with an Agilent/HP 16197 test fixture or equivalents.

4. SRF measured using an Agilent/HP 8753ES network analyzer or equivalent and a Coilcraft SMD-D test fixture.

5. DCR measured on a Keithley 580micro-ohmmeter or equivalent and a Coilcraft CCF858 test fixture.

6. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



CRITICAL PRODUCTS & SERVICES

Specifications subject to change without notice.

Please check our website for latest information.

Document AS100-1 Revised 11/16/10


1102 Silver Lake Road
Cary IL 60013

Phone 800-981-0363
Fax 847-639-1508


E-mail cps@coilcraft.com
Web www.coilcraft-cps.com

AS336RAA Series (0805)

Typical Q vs Frequency

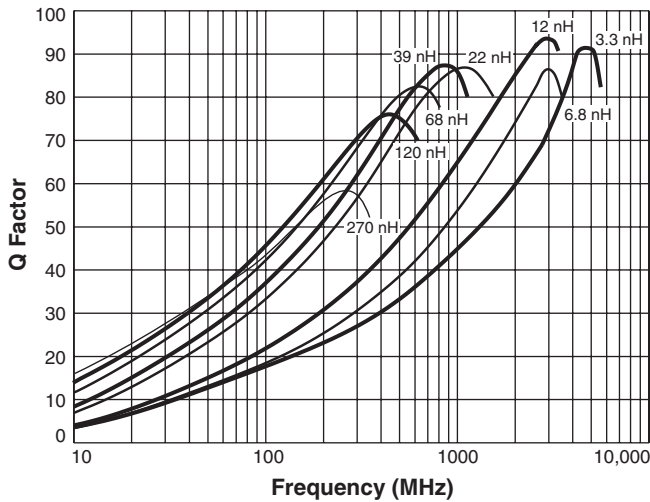

Typical L vs Frequency

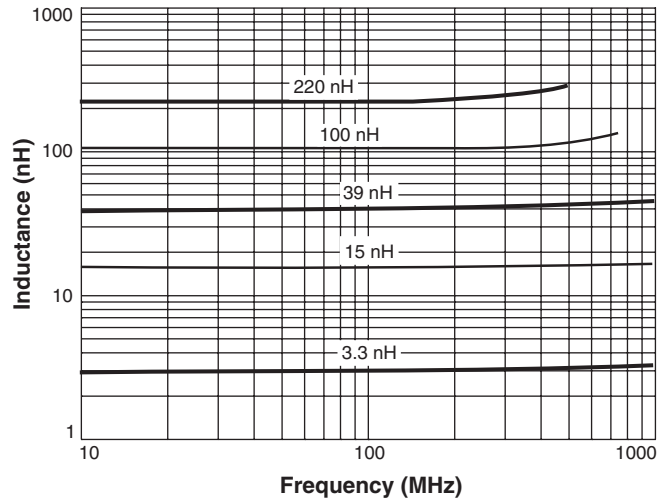

Core material Ceramic

Terminations Tin-lead (63/37) over silver-platinum-glass frit

Ambient temperature -55°C to +125°C with I_{max} current, +125°C to +155°C with derated current

Storage temperature Component: -55°C to +155°C.
Packaging: -55°C to +80°C



Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +155 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Enhanced crush-resistant packaging 2000 per 7" reel
Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.65 mm pocket depth

Current Derating

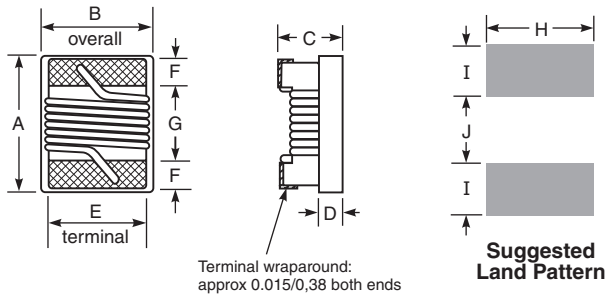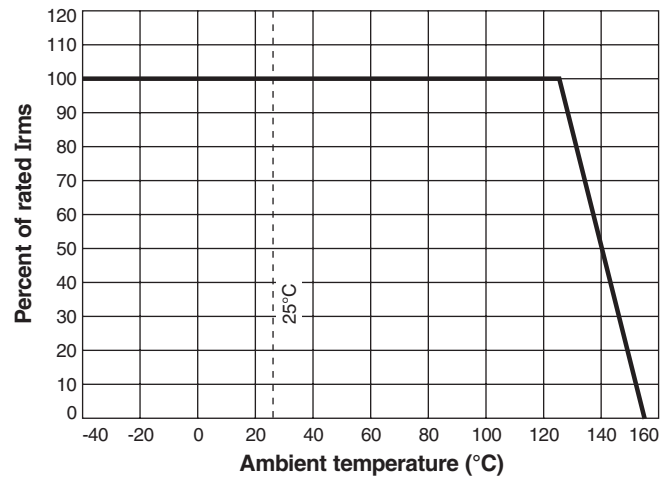

A	max B	max C	max D	ref E	F	G	H	I	J	
0.090	0.068	0.060	0.020	0.050	0.020	0.040	0.070	0.040	0.030	inches
2,29	1,73	1,52	0,51	1,27	0,51	1,02	1,78	1,02	0,76	mm

All dimensions are without solder applied to the terminations. For maximum dimensions with solder, add 0.006 inches / 0,152 mm.

COILCRAFT ACCURATE
PRECISION REPEATABLE
MEASUREMENTS
SEE INDEX **TEST FIXTURES**