

SPECIFICATIONS**Mini Din Connector****Mechanical**

Mating Force: 4.50Kg (9.91Lb) max.

Unmating Force: 0.90~2.70Kg (1.98~5.95Lb)

Durability: 500 Cycles

Electrical

Voltage Rating: 30V

Current Rating: 1A

Contact Resistance: 30m Ω max.

Dielectric Withstanding Voltage: 750V AC/1min min.

Insulation Resistance: 1000M Ω min.

Physical

Housing: Thermoplastic, UL 94V-0 rated

Contact: Copper alloy

Shell: Steel alloy


Plating: See "ORDERING INFORMATION"

Operating Temperature: -55 $^{\circ}$ C to +85 $^{\circ}$ C

MH Series


Single, R/A, T/H, Black

4 Pos.




第 I 區

DRAWING

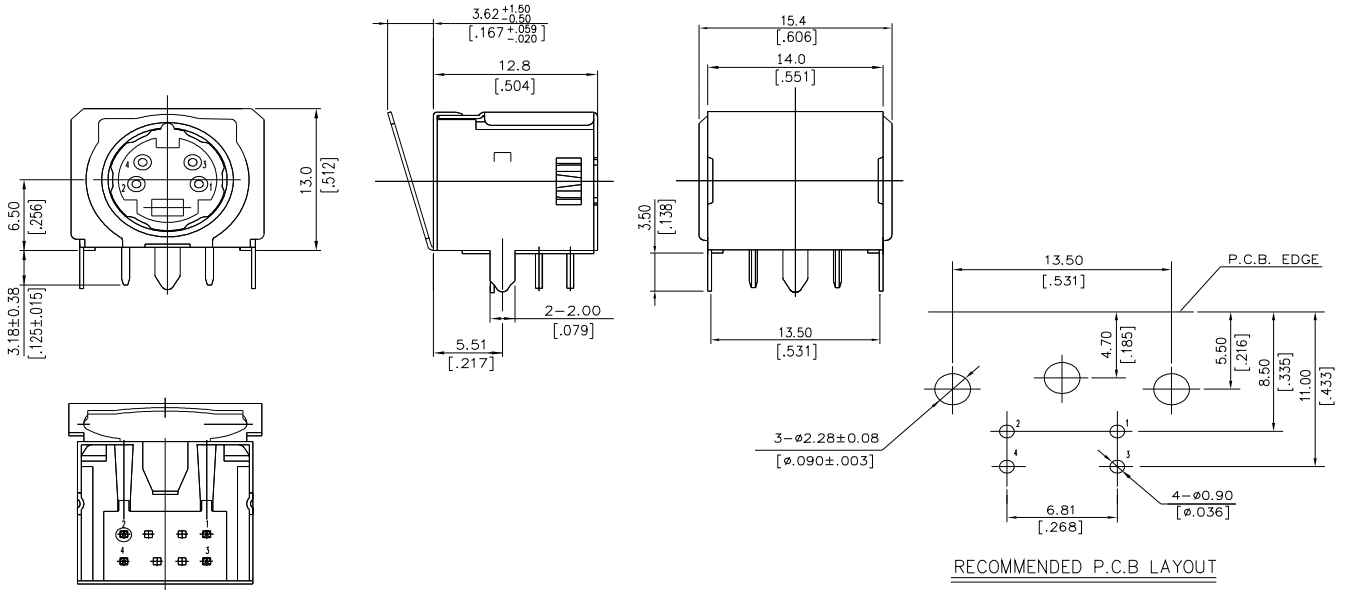

第IV區

ORDERING INFORMATION

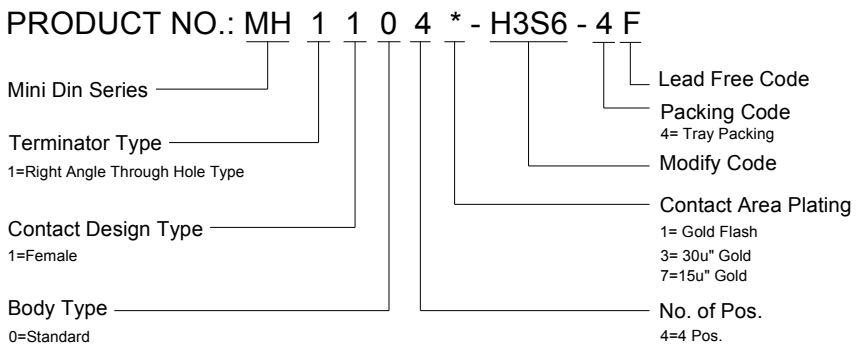

第V區