





PANEL THICKNESS	X dimension
0.75-1.25 [0.030-.049]	19.2- <i>0.1</i> [7.56]
1.25-2.0 [0.049-.079]	19.4- <i>0.1</i> [7.64]
2.0-3.0 [0.079-.118]	19.8- <i>0.1</i> [7.80]

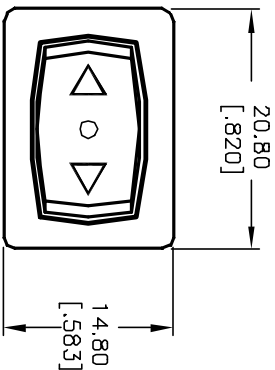

PANEL CUTOOUT
NOT TO SCALE

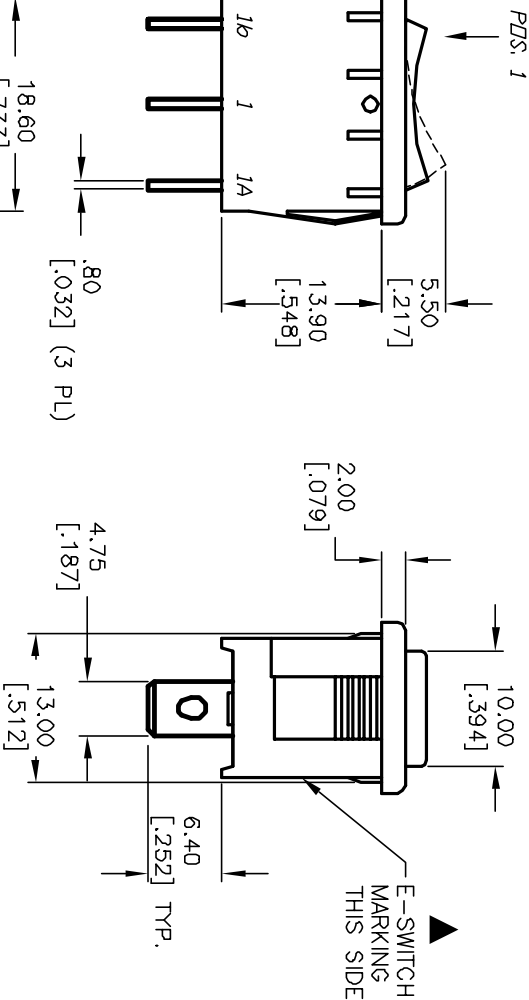

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
<ON>	OFF	<ON>
1-1a	OPEN	1-1b




< >=MOMENTARY

CIRCUIT: SPD

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 15A @ 125VAC OR
6A @ 250VAC
5. MATERIALS: Silver Plated Copper Alloy
CONTACTS: Coin Silver, Silver Plated
6. ELECTRIC LIFE: 10,000 cycles
7. CONTACT RESISTANCE: <20 Mega- Ω M
8. INSULATION RESISTANCE: >1000 Mega- Ω M
9. DIELECTRIC STRENGTH: >1500 V 1 minute
 >3000 V between poles

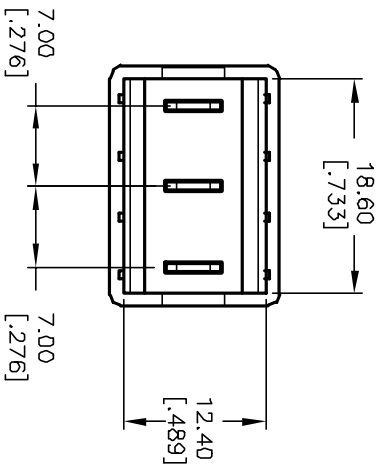

E-SWITCH®				
TITLE				
R19661 BLK BLK HF				
SCALE	DATE	DR	JWG	REV
1.5:1	4/16/02	CB	M306201	B