

## Zener Diodes

### Features

- Silicon planar power Zener diodes
- For use in stabilizing and clipping circuits with high power rating
- The Zener voltages are graded according to the international E 12 standard. Smaller voltage tolerances are available upon request
- These diodes are also available in the MELF case with the type designation ZMY3V9 to ZMY100
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**



17173

### Mechanical Data

**Case:** DO-41

**Weight:** approx. 310 mg

**Cathode band color:** black

**Packaging codes/options:**

TR/5K per 13" reel (52 mm tape), 25K/box

TAP/5K per ammpack (52 mm tape), 25K/box

### Absolute Maximum Ratings

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Zener current (see Table "Characteristics")				
Power dissipation		$P_{tot}$	1.3 <sup>1)</sup>	W

Notes:

<sup>1)</sup> Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

### Thermal Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air		$R_{thJA}$	110 <sup>1)</sup>	K/W
Maximum junction temperature		$T_j$	175	$^{\circ}\text{C}$
Storage temperature range		$T_{stg}$	- 55 to + 175	$^{\circ}\text{C}$

Notes:

<sup>1)</sup> Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

### Electrical Characteristics

Part number	Zener voltage range <sup>2)</sup>		Dynamic resistance	Temperature coefficient of Zener voltage		Test current	Reverse voltage	Admissible Zener current <sup>1)</sup>
	$V_Z$ at $I_{ZT}$		$r_{zj}$ at $I_{ZT1}$ , $f = 1$ kHz	$TC_{VZ}$ at $I_{ZT}$		$I_{ZT}$	$V_R$ at $I_R = 0.5 \mu A$	$I_Z$ at $T_{amb} = 25^\circ C$
	V		$\Omega$	$10^{-4}/^\circ C$		mA	V	mA
	min.	max.	typ.	min.	max.			
ZPY3V9	3.7	4.1	4 (< 7)	- 7	2	100	-	290
ZPY4V3	4.0	4.6	4 (< 7)	- 7	3	100	-	260
ZPY4V7	4.4	5.0	4 (< 7)	- 7	4	100	-	235
ZPY5V1	4.8	5.4	2 (< 5)	- 6	5	100	> 0.7	215
ZPY5V6	5.2	6.0	1 (< 2)	- 3	5	100	> 1.5	193
ZPY6V2	5.8	6.6	1 (< 2)	- 1	6	100	> 2.0	183
ZPY6V8	6.4	7.2	1 (< 2)	0	7	100	> 3.0	157
ZPY7V5	7.0	7.9	1 (< 2)	0	7	100	> 5.0	143
ZPY8V2	7.7	8.7	1 (< 2)	3	8	100	> 6.0	127
ZPY9V1	8.5	9.6	2 (< 4)	3	8	50	> 7.0	117
ZPY10	9.41	10.6	2 (< 4)	5	9	50	> 7.5	105
ZPY11	10.4	11.6	3 (< 7)	5	10	50	> 8.5	94
ZPY12	11.4	12.7	3 (< 7)	5	10	50	> 9.0	85
ZPY13	12.4	14.1	4 (< 9)	5	10	50	> 10	78
ZPY15	13.8	15.8	4 (< 9)	5	10	50	> 11	70
ZPY16	15.3	17.1	5 (< 10)	7	11	25	> 12	63
ZPY18	16.8	19.1	5 (< 11)	7	11	25	> 14	57
ZPY20	18.8	21.2	6 (< 12)	7	11	25	> 15	52
ZPY22	20.8	23.3	7 (< 13)	7	11	25	> 17	48
ZPY24	22.8	25.6	8 (< 14)	7	12	25	> 18	42
ZPY27	25.1	28.9	9 (< 15)	7	12	25	> 20	38
ZPY30	28	32	10 (< 20)	7	12	25	> 22.5	35
ZPY33	31	35	11 (< 20)	7	12	25	> 25	31
ZPY36	34	38	25 (< 60)	7	12	10	> 27	29
ZPY39	37	41	30 (< 60)	8	12	10	> 29	26
ZPY43	40	46	35 (< 80)	8	13	10	> 32	24
ZPY47	44	50	40 (< 80)	8	13	10	> 35	22
ZPY51	48	54	45 (< 100)	8	13	10	> 38	20
ZPY56	52	60	50 (< 100)	8	13	10	> 42	18
ZPY62	58	66	60 (< 130)	8	13	10	> 47	16
ZPY68	64	72	65 (< 130)	8	13	10	> 51	14
ZPY75	70	79	70 (< 160)	8	13	10	> 56	13
ZPY82	77	88	80 (< 160)	8	13	10	> 61	12
ZPY91	85	96	120 (< 250)	9	13	5	> 68	11
ZPY100	94	106	130 (< 250)	9	13	5	> 75	10

Notes:

<sup>1)</sup> Valid provided that leads are kept at ambient temperature at a distance of 10 mm from case

<sup>2)</sup> Tested with pulses  $t_p = 5$  ms

## Typical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

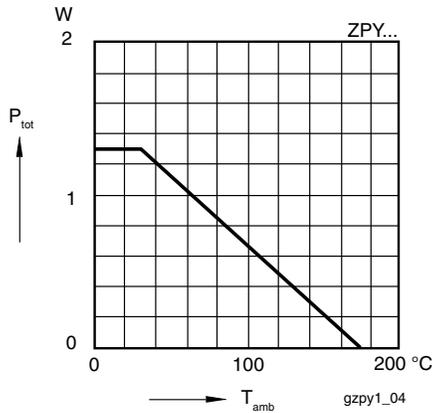


Figure 1. Admissible Power Dissipation vs. Ambient Temperature

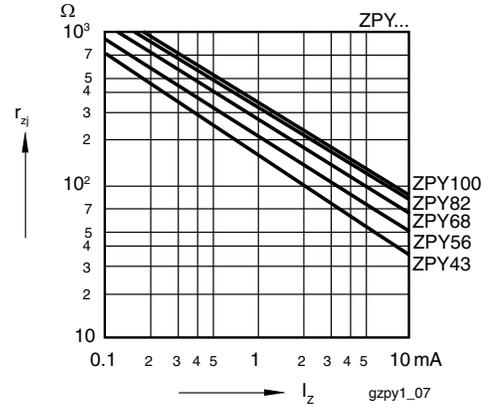


Figure 4. Dynamic Resistance vs. Zener Current

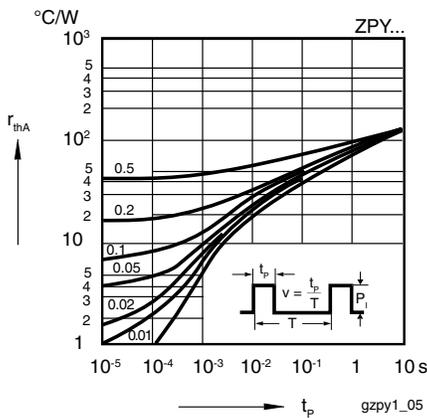


Figure 2. Pulse Thermal Resistance vs. Pulse Duration

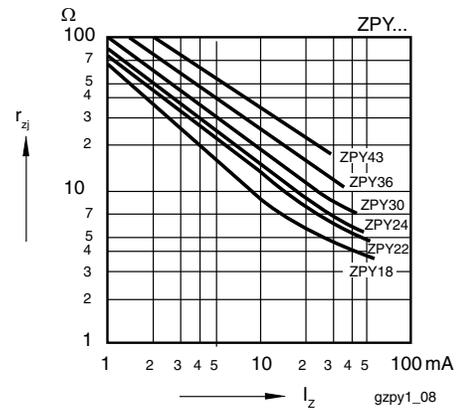


Figure 5. Dynamic Resistance vs. Zener Current

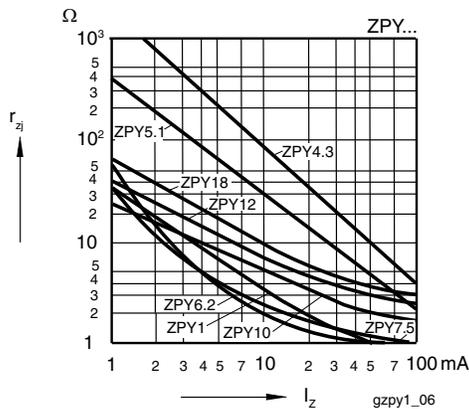


Figure 3. Dynamic Resistance vs. Zener Current

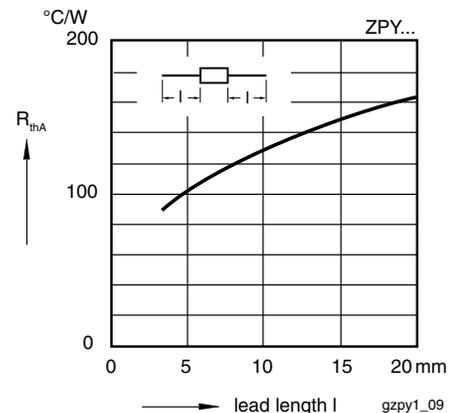


Figure 6. Thermal Resistance vs. Lead Length

# ZPY3V9 to ZPY100

Vishay Semiconductors

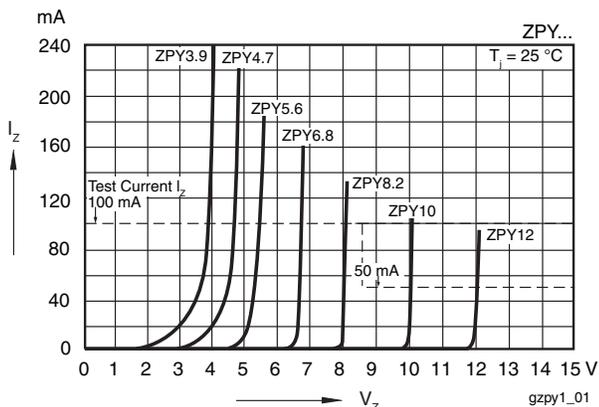


Figure 7. Breakdown Characteristics

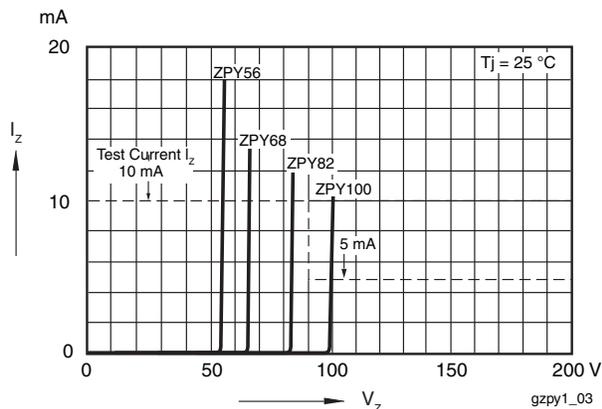


Figure 9. Breakdown Characteristics


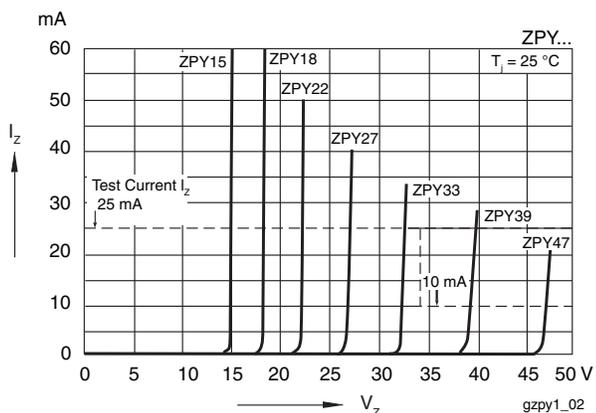


Figure 8. Breakdown Characteristics

## Package Dimensions in millimeters (inches): DO-41



Document no.: 6.561-5001.02-4  
 Rev. 3 - Date: 09 February 2005  
 94 9368

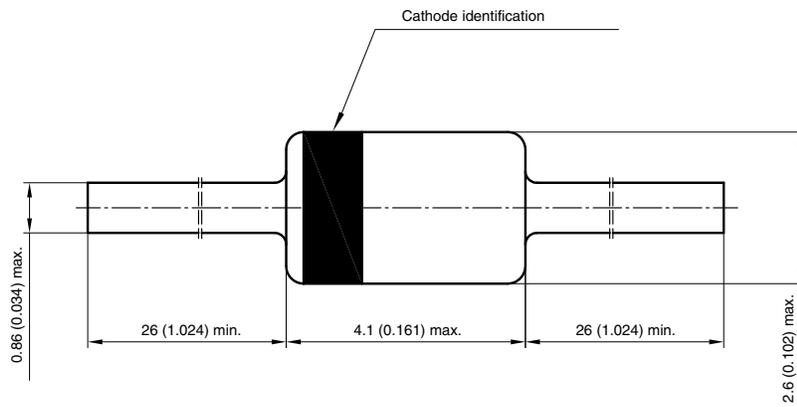

## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.