


SAW Filter

F5KY737M0B4NN

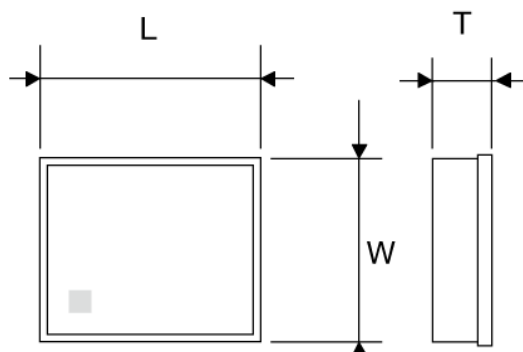

■ Features

- Item Summary
LTE, 504
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping Embossed 3000 , 15000pcs

■ Products characteristics table

Temperature Range	-30 to +85°C
Band(3GPP)	B12
Use	LTE
Transmitting / Receiving	Rx Filter
Insertion Loss	1.4dB
Attenuation	57dB
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	1.4mm +0.1:-0.1
W	1.0mm +0.1:-0.1
T	0.5mm max

2015.06.03

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.