

Product Features

- GaN on SiC Broadband High Power Amplifier
- 2500 ~ 6000MHz Operation Bandwidth
- 10W Typical Psat
- 20% typical Power Efficiency at Psat

Applications

- General Purpose

**Description**

The power amplifier module is designed for General Purpose.

Operating frequency range is from 2500~ 6000MHz.

Gallium Nitride on SiC Technology

Improved thermal handling by patented technology.

Electrical Specifications @ VDD=28VDC, T=25°C, 50Ω System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency Range	MHz	2500	-	6000	BW
Power Output @ P _{SAT} (CW)	Watt	-	10	-	P _{SAT}
Power Gain	dB	-	30	-	G _P
Gain Flatness @ P _{SAT}	dB	-	±1.5	±2.5	ΔG
Gain Variation	dB	-	±1.5	±2.0	ΔG _{TEMP}
Input Return Loss	dB	-	-4.5	-3.5	S11
Power Added Efficiency @ P _{SAT}	%	-	20	-	η
Operating Voltage	Volt	27.5	28	30	VDC
Current Consumption @ P _{out} = 10W, VDC=28V	Amp	-	2.2	-	IDD

Environmental Characteristics

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Case Temperature	°C	-30	-	85	T _c
Storage Temperature	°C	-45	-	105	T _{stg}
Relative humidity w/o condensation	%	-	-	95	RH
Altitude	Feet	10,000	30,000	-	ALT
Shock & Vibration	Per Mil Std 810E				SH / VI

Mechanical Specifications



PARAMETER	UNIT	VALUE	LIMIT
Dimensions	Inch	5.12 x 2.52 x 0.84	-
	mm	130 x 64 x 21.5	
Weight	lb.	0.66	-
	Kg	0.30	
RF Connectors In/Out	-	SMA female	-
DC & Control Signals Connector	-	D-sub, 9-Pin	-
Cooling	-	External Heat-sink	-

Performance Data**(1) Spectrum Analyzer Test Results****1) Summary Table**

Test Condition : Ta=25 °C, Tc=37 °C


Test Condition : Fixed Input Power=-3dBm				
Frequency	Pout	Ids @Pout	Power Gain @Pout	Drain Efficiency @Pout
MHz	dBm	A	dB	%
2500	41.37	2.16	30.37	22.67
2700	40.15	2.12	29.15	17.44
2900	41.15	2.01	30.15	23.16
3100	41.24	2.07	30.24	22.95
3300	40.49	2.22	29.49	18.01
3500	40.92	2.36	29.92	18.7
3700	41.18	2.27	30.18	20.65
3900	41.6	2.32	30.60	22.25
4100	42.13	2.27	31.13	25.69
4300	41.2	2.21	30.20	21.3
4500	40.3	2.19	29.30	17.47
4700	41.68	2.29	30.68	22.96
4900	40	2.13	29.00	16.77
5000	41.86	2.22	30.86	24.69
5200	41	2.2	30.00	20.44
5400	42.15	2.12	31.15	27.64
5600	41.27	1.59	30.27	30.09
5800	41.42	1.53	30.42	32.37
6000	40.25	1.72	29.25	21.99

2) Performance Graph

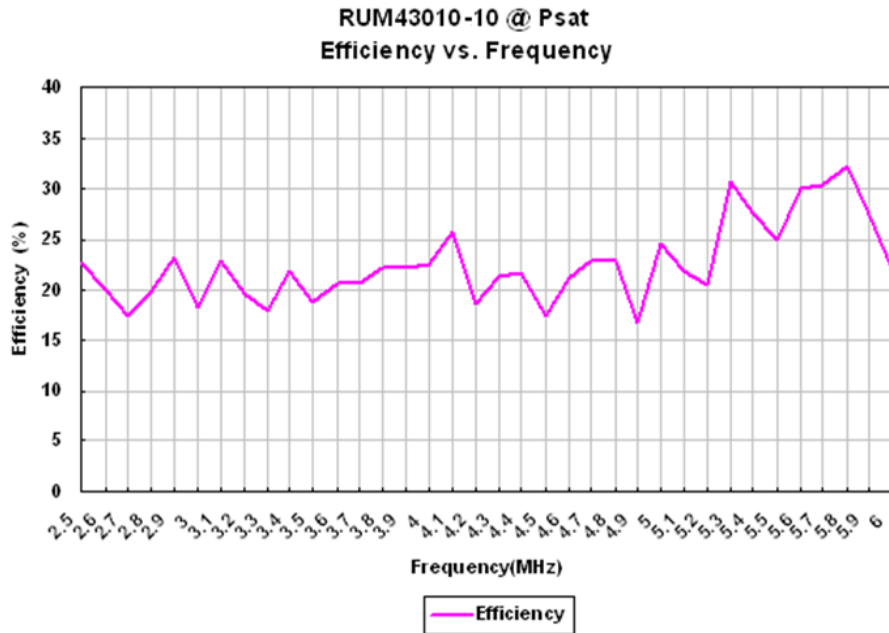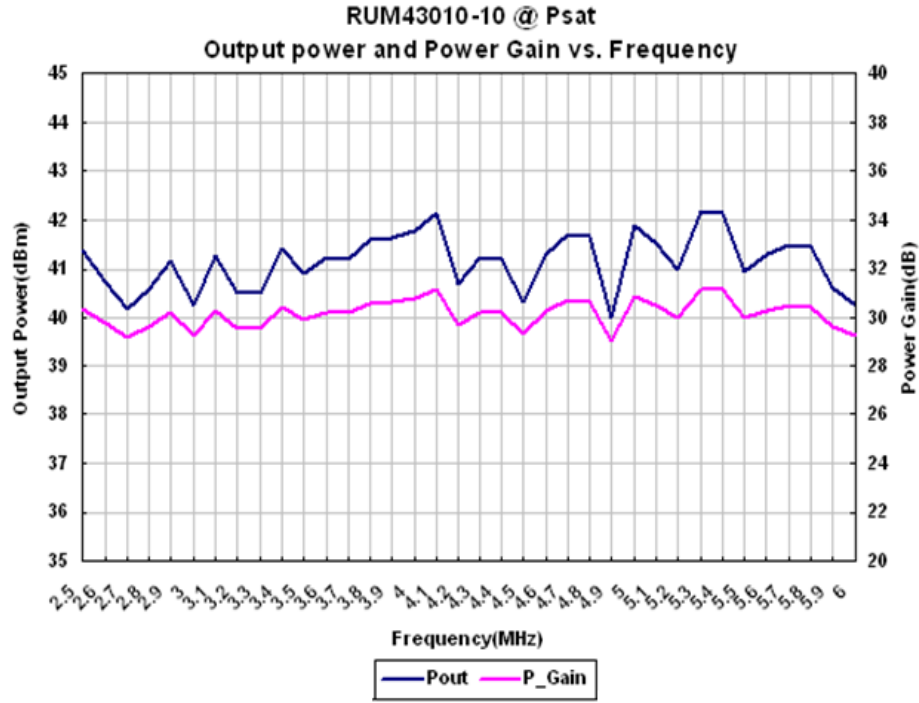

Outline Drawing

* Unit: mm[inch] | Tolerance ±0.2[.008]

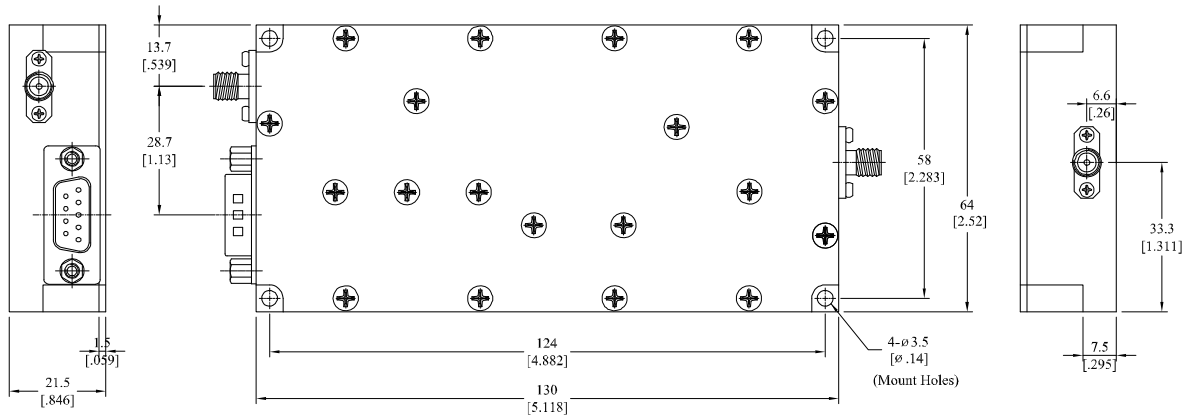

Note
Cover screw holes and Module Mount Holes would be changed.

Pin Description

D-Sub, 9-Pin, male

Pin No	Description	I/O	Specifications
1	N.C.	-	-
2	N.C.	-	-
3	N.C.	-	-
4	N.C.	-	-
5	Shutdown	I	Enable = 0V or Open, Disable = 5V(40mA)
6	VDD	I	28 VDC
7	VDD	I	28 VDC
8	GND	I	Ground
9	GND	I	Ground

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RUM43010-10	2012.10.04	1.0	-	-

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-250-5078.