




Rev	AWO #	Description	Date	Appr
-		RELEASED	10/21/09	

APPROVED: _____
 DATE: _____ TITLE: _____

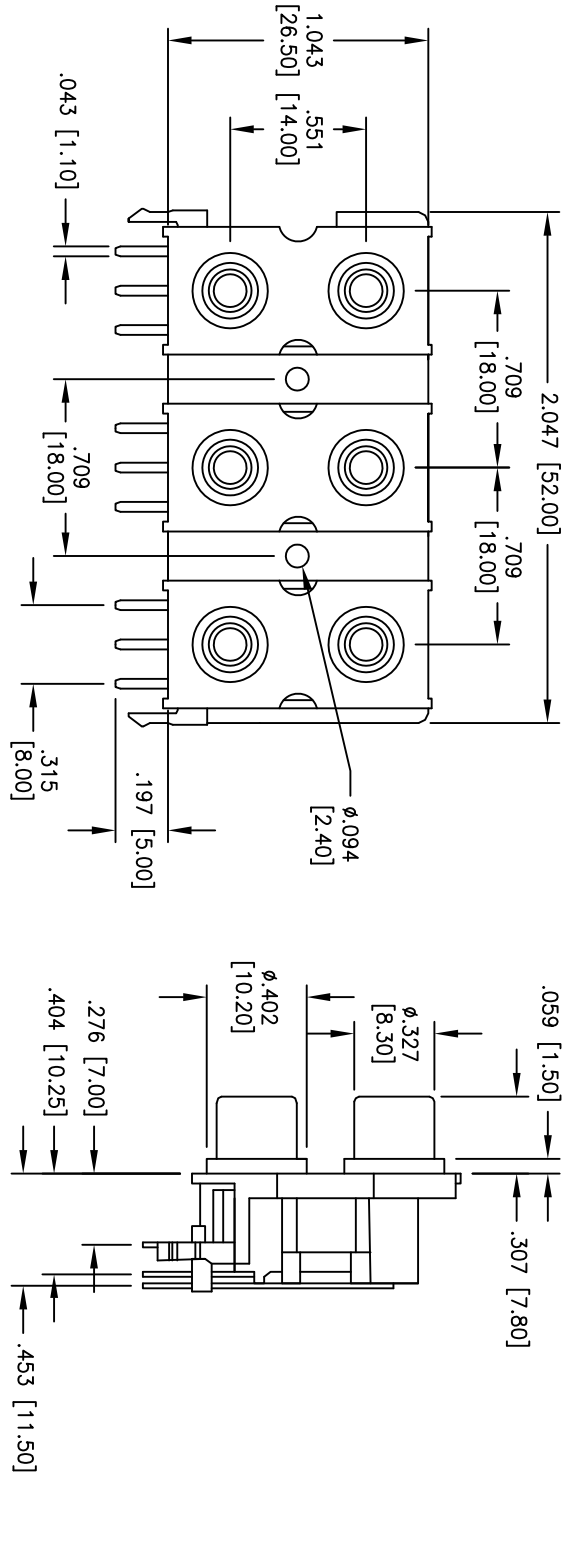

B = BLACK
 R = RED
 G = GREEN
 Y = YELLOW
 W = WHITE

Color Layout

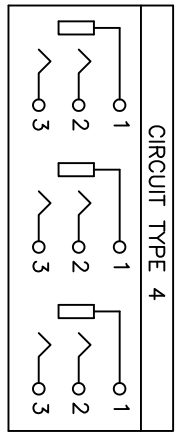

PCB LAYOUT (BOTTOM VIEW)

SPECIFICATIONS:

Material:
 Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Inserts: PBT, Color Black, Red, Green, Yellow, White
 Bushing: Brass, Nickel plated
 Contacts: Brass

Plating:

Tin or Silver over Copper underplate

Electrical:

Operating voltage: 12 VDC max.
 Current rating: 1 Amp max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute


Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 235°C for 5 seconds

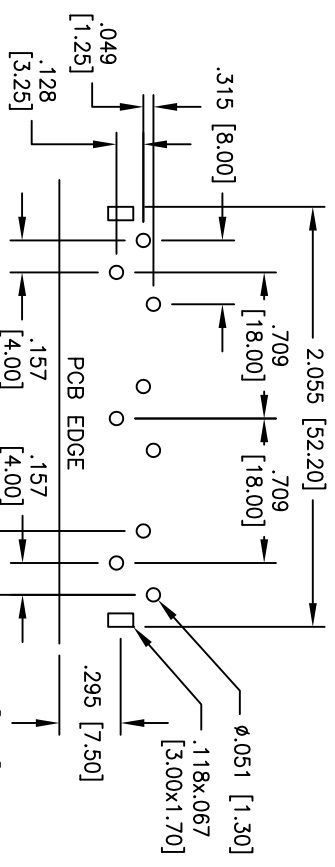

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 6 PORTS, 2 X 3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
.X	± .10	ØX	± .10	ØXXX	± .015
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXX	± .010		

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	RCA-114-B/R/G/Y/W/R	-

REF: SCALE: NTS SHEET 1 OF 1

