

KBP3005-310

3 Amp Bridge Rectifier 50 to 1000 Volts

Features

- Surge overload ratings 80 amperes peak
- Ideal for printed circuit board
- RoHS compliant package



Packing & Order Information

500/Box



RoHS
COMPLIANT

Graphic symbol

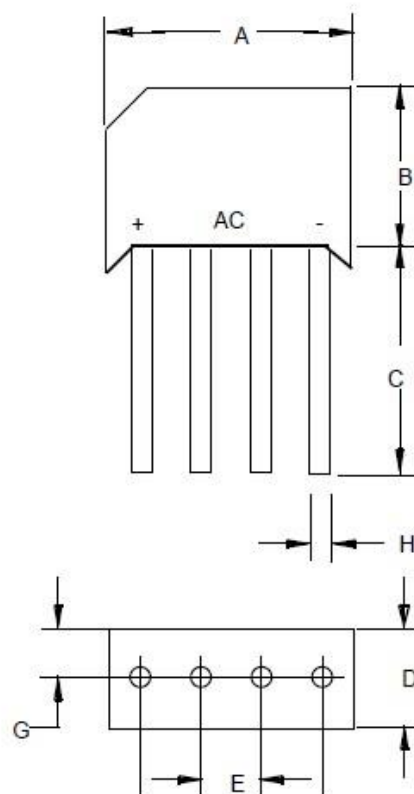

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.693	---	17.60	
B	---	.504	---	12.80	
C	.750	---	19.00	---	
D	---	.250	---	6.40	
E	.150	---	3.80	---	3PL/TYP
G	.125	---	3.20	---	
H	.320		0.80		

Maximum Ratings

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
KBP3005	KBP3005	50V	35V	50V
KBP301	KBP301	100V	70V	100V
KBP302	KBP302	200V	140V	200V
KBP304	KBP304	400V	280V	400V
KBP306	KBP306	600V	420V	600V
KBP308	KBP308	800V	560V	800V
KBP310	KBP310	1000V	700V	1000V


KBP3005-310

3 Amp Bridge Rectifier 50 to 1000 Volts

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Test Conditions	Unit
IF(AV)	Average Forward Current	TA = 25°C	3.0A
IFSM	Peak Forward Surge Current	8.3ms, half sine	80A
VF	Maximum Forward Voltage Drop Per Element	IFM = 1.0A per element TA = 25°C	1.1V
IR	Maximum DC Reverse Current At Rated DC Blocking Voltage	TJ = 25°C TJ = 100°C	10μA

■ RATINGS AND CHARACTERISTIC CURVES

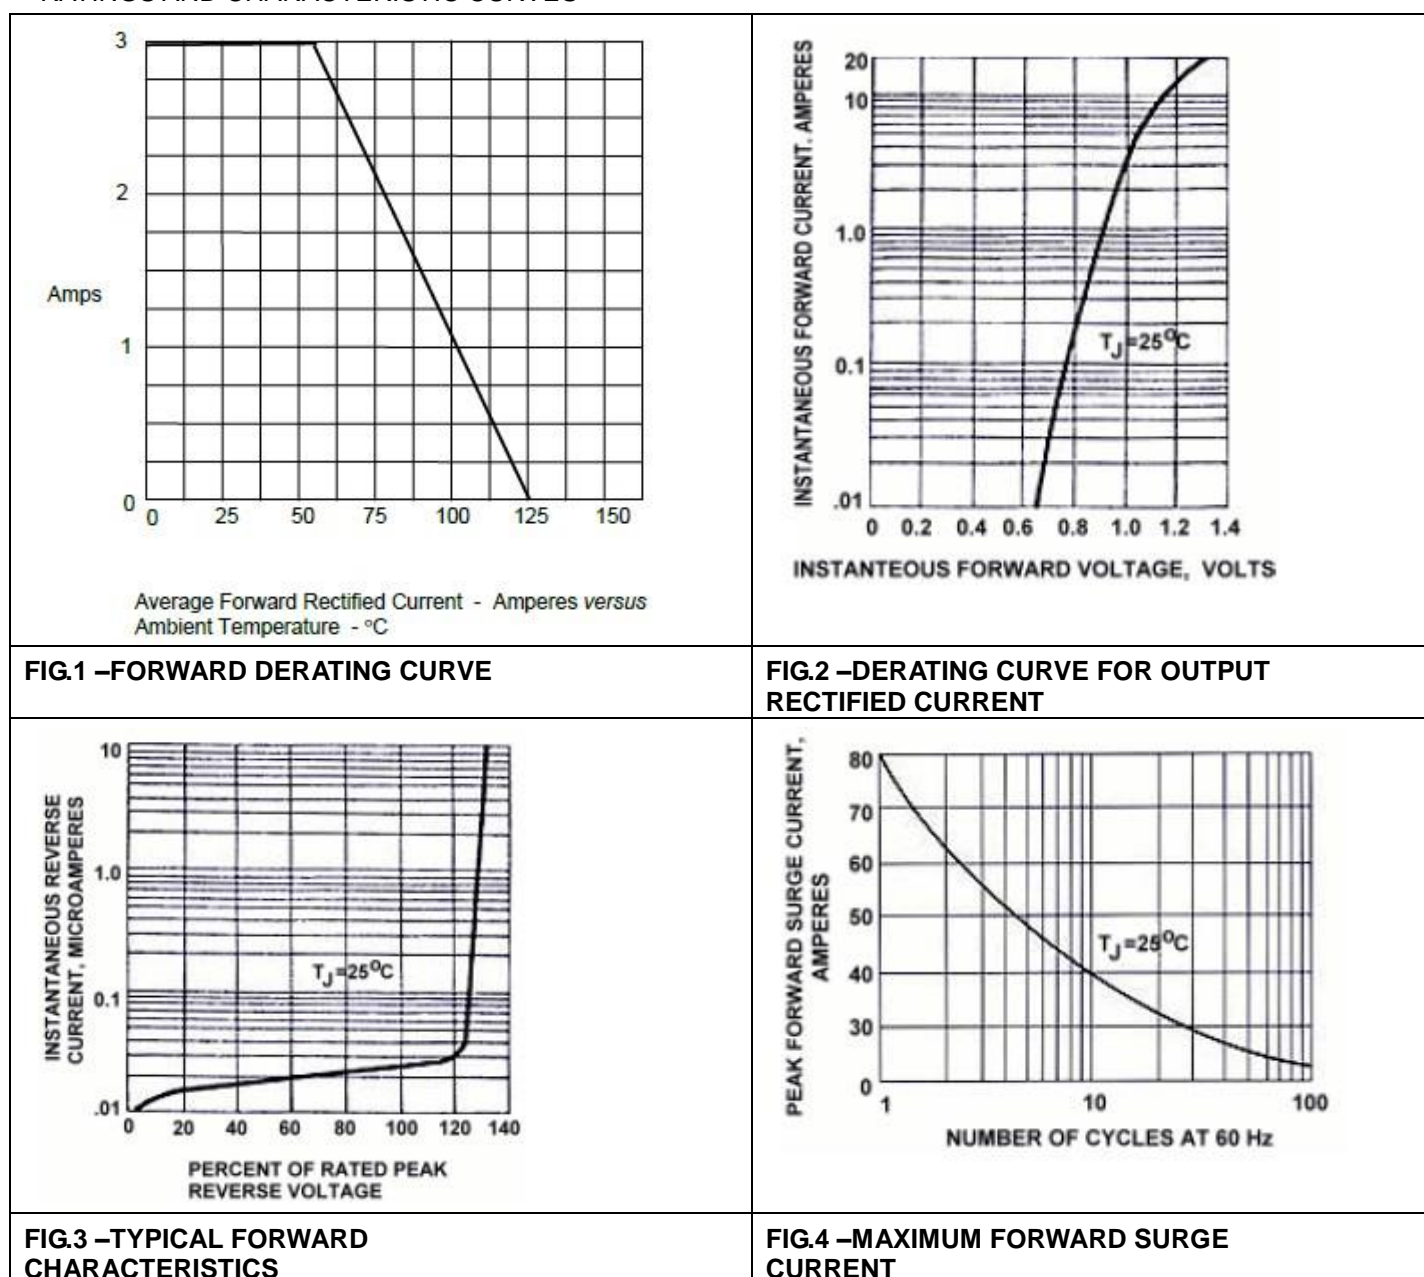

KBP3005-310

3 Amp Bridge Rectifier 50 to 1000 Volts

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.