
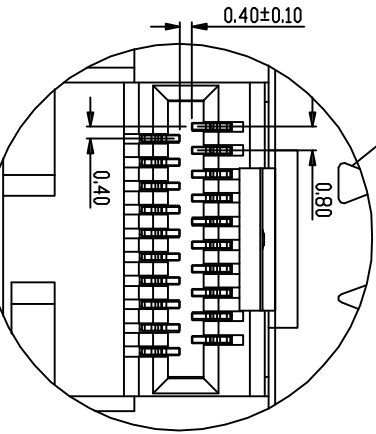


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/16/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

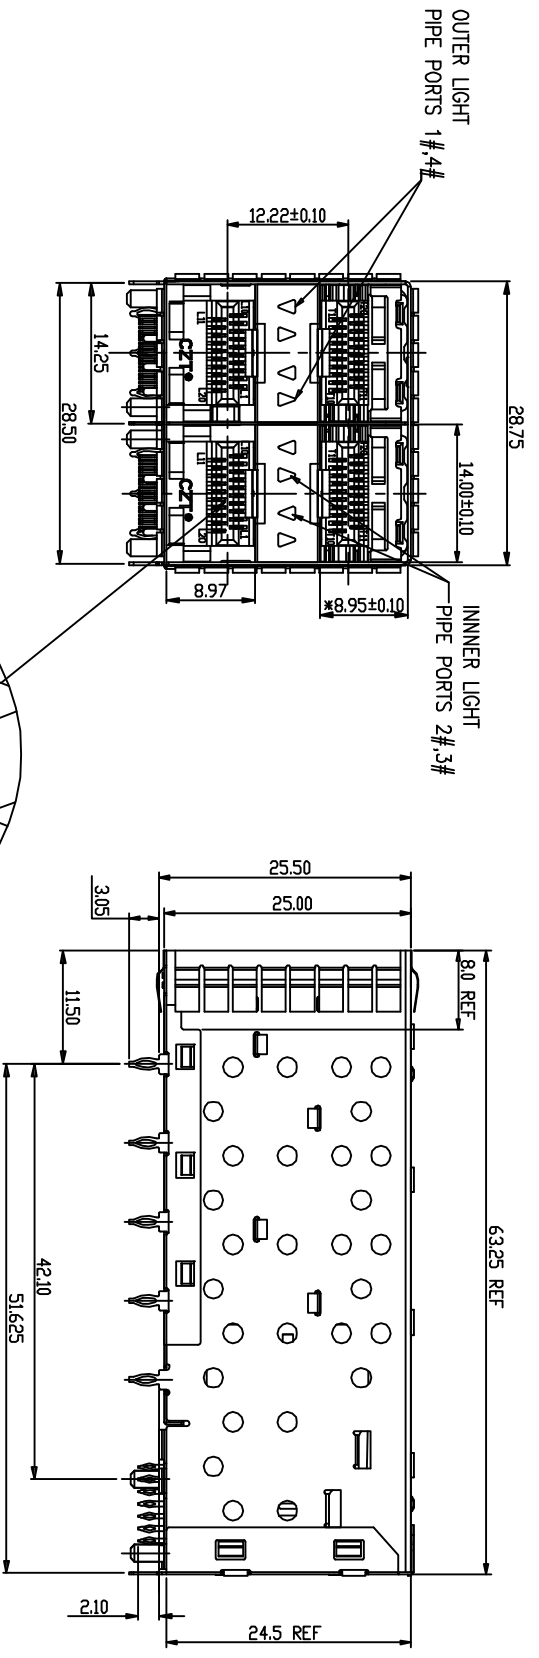

**SPECIFICATIONS:**

**Material:**  
 Housing: Hi-temp thermoplastic, glass reinforced, rated UL 94V-0  
 Housing color: Black  
 Contact: Copper Alloy  
 Cage: Copper Alloy  
 Light pipes: Polycarbonate  
 EMI Clip: Copper Alloy, Nickel plated  
 Plating:  
 15u" gold over Nickel underplate on contact area.  
**Electrical:**  
 Contact resistance: 40 milliohms max initial.  
 Dielectric withstanding voltage: 300 AC/Min.  
 Temperature Rating:  
 Operating temperature: -55°C to +85°C  
 Storage temperature: -55°C to +85°C  
**Environmental:**  
 Lead free, RoHS compliant



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SFP 2X2, W/ INNER & OUTER LIGHT PIPE PORTS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	7/16/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	SFCJ-4-LP3-EMI	-
REF: S00095C	SCALE: NTS	SHEET 1 OF 4